



万鑫精工（湖南）股份有限公司
WANSHSIN SEIKOU (HUNAN) CO., LTD
企业官网: www.wanshsin.com
生产基地: 湖南省长沙市宁乡高新技术产业园区金沙东路158号



官微二维码



官网二维码



微型减速机产品手册

MICRO GEAR MOTOR CONTENTS



致力于打造世界一流的智能机电品牌
Committed To Building A World-class Intelligent Electromechanical Brand



万鑫精工(湖南)股份有限公司


WANSHSIN SEIKOU (HUNAN) CO., LTD

专业化减速机 / 减速电机 / 控制器制造商

智能自动化全套方案提供商

SPECIALIZED REDUCER / REDUCTION MOTOR / CONTROLLER MANUFACTURER

INTELLIGENT AUTOMATION SOLUTION PROVIDER

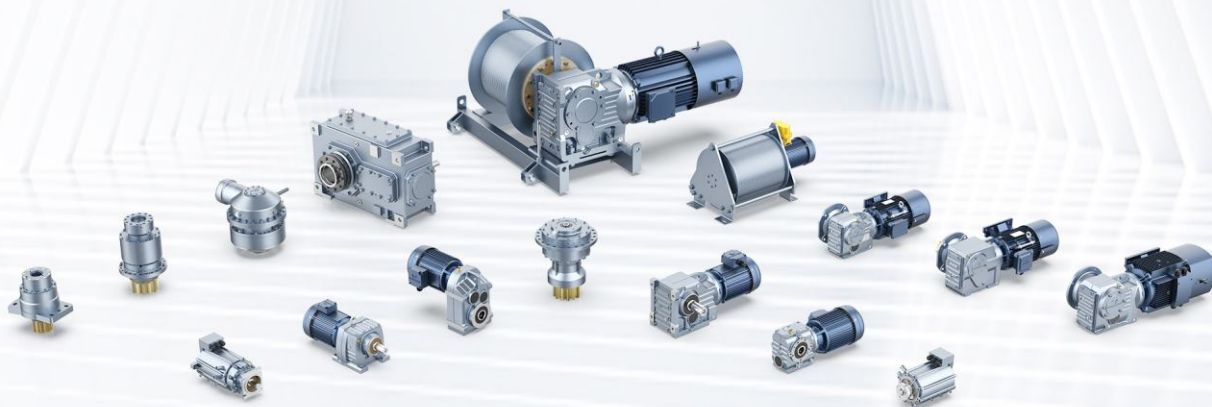

CONTENTS

01	企业介绍 COMPANY INTRODUCTION	31	180W/200W Motor performance
	企业简介 Company Introduction		各型号电机性能
	核心竞争力 Core Competitiveness		减速箱减速比性能对照表
	企业荣誉 Enterprise Honor		Reduction ratio performance chart
05	订购方式 SELECTION	33	250W
	微型交流电机 Micro AC motor		各型号电机性能 Motor performance
	微型直流电机 Micro DC motor		减速箱减速比性能对照表
			Reduction ratio performance chart
			外形尺寸 (CAD) Dimensions
08	通用参数 GENERAL PARAMETERS	35	调速器
	微型交流电机接线图及运行电容外形尺寸		SPEED CONTROLLER
	Micro AC motor wiring diagram dimensions and		
	running capacitor dimensions		
	微型直流电机接线图		
	Micro DC motor wiring diagram		
09	微型交流电机 MICRO AC MOTOR	39	微型直流电机 MICRO DC MOTOR
09	6W	39	60DC
	各型号电机性能 Motor performance		各型号电机性能 Motor performance
	减速箱减速比性能对照表		减速箱减速比性能对照表
	Reduction ratio performance chart		Reduction ratio performance chart
	外形尺寸 (CAD) Dimensions		外形尺寸 (CAD) Dimensions
11	15W	40	70DC
	各型号电机性能 Motor performance		各型号电机性能 Motor performance
	减速箱减速比性能对照表		减速箱减速比性能对照表
	Reduction ratio performance chart		Reduction ratio performance chart
	外形尺寸 (CAD) Dimensions		外形尺寸 (CAD) Dimensions
13	25W	41	80DC
	各型号电机性能 Motor performance		各型号电机性能 Motor performance
	减速箱减速比性能对照表		减速箱减速比性能对照表
	Reduction ratio performance chart		Reduction ratio performance chart
	外形尺寸 (CAD) Dimensions		外形尺寸 (CAD) Dimensions
20	40W/60W	44	90DC
	各型号电机性能 Motor performance		各型号电机性能 Motor performance
	减速箱减速比性能对照表		减速箱减速比性能对照表
	Reduction ratio performance chart		Reduction ratio performance chart
	外形尺寸 (CAD) Dimensions		外形尺寸 (CAD) Dimensions
24	90W/120W	54	100DC
	各型号电机性能 Motor performance		各型号电机性能 Motor performance
	减速箱减速比性能对照表		减速箱减速比性能对照表
	Reduction ratio performance chart		Reduction ratio performance chart
	外形尺寸 (CAD) Dimensions		外形尺寸 (CAD) Dimensions
29	140W/160W	56	带接线盒减速电机选购指南
	各型号电机性能 Motor performance		TERMINAL BOX DIRECTION
	减速箱减速比性能对照表		
	Reduction ratio performance chart		
		57	技术应用 (说明及安装)
			TECHNICAL APPLICATION
			(Description and installation)

万鑫精工(湖南)股份有限公司

WANSHSIN Seikou(Hunan)Co., Ltd.

万鑫精工，2009年创始于广东东莞，2014年总部搬迁至湖南长沙。目前在广东东莞和湖南长沙有两大生产基地，公司是国家级“专精特新”重点小巨人企业，拥有湖南省企业技术中心和湖南省工程技术研究中心两大研发平台，并先后在湖南总部、日本、深圳成立了三大研发中心，以创新引领行业高质量发展。

At present, it has two production bases in Dongguan, Guangdong Province and Ningxiang, Hunan Province, and two technological innovation platforms: Hunan Enterprise Technology Center and Changsha Technological Innovation Center. It has successively established three R & D centers in Japan, Shenzhen and Hunan headquarters to lead the high-quality development of the industry with innovation.

万鑫精工，是集研发、生产、销售、服务于一体的专业化减速机、减速电机、控制器制造商及智能自动化全套方案提供商。产品涵盖：机（减速机）、电（电机）、控制器（伺服驱动器、变频器），已生产出的产品型号达8万种，已成为减速机领域产品线最齐全的公司之一。产品广泛应用于自动化生产线、机器人、工程机械、仓储物流、车库、施工电梯、陶瓷、畜牧等行业领域。

Our products include: machine (reducer), electricity (motor), controller (servo driver, inverter). We have produced more than 80,000 product models. Wanshsin is one of the companies with the most complete product lines in the reducer filed.

万鑫精工秉持“致力于打造世界一流的智能机电品牌”的企业愿景，立志走“精鑫”强企强国之路，以“专业化、品牌化、国际化”为目标，笃志躬行为全球客户提供技术前沿、品质卓越、制造前进、服务快速的各类传动产品，向着推动世界工业智能化发展不懈奋斗！

Adhering to the vision of "committed to building a world-class intelligent electromechanical brand", WANSHSIN Seikou is determined to take the road of "High Precision" to strengthen the company and the country. With the goal of "specialization, branding, and internationalization", WANSHSIN Seikou is committed to providing global customers with various transmission products with frontier technology, excellent quality, advanced production and effective service, and make unremitting efforts to promote the development of the world's industrial intelligence!



核心竞争力

Core Competitiveness



一、研发领先

Leading R&D Capacity

三大研发中心/3 R&D Centers

拥有湖南省企业技术中心和长沙技术创新中心平台，先后成立了日本、深圳、湖南总部三大研发中心，以创新引领行业高质量发展。

With the platform of Hunan Enterprise Technology Center and Changsha Technology Innovation Center, Wanshsin have established R&D centers in Changsha headquarters ,Shenzhen and Janpan to lead the high-quality development of the industry with innovation.

科研团队/R&D Team

公司每年将营业收入的4%以上作为研发投入，建立了84人的研发团队，其中博士3人、研究生10人，本科以上学历占比55%。行业为数不多可以提供机电控三合一系统化解决方案的公司之一。

Wanshsin invests more than 4% of its operating revenue in research and development every year, and has established a research and development team of 84 people, including 3 doctors and 10 postgraduates, with a bachelor's degree or above accounting for 55%.

核心技术/Core technology

拥有专利94项，其中发明专利12项，先后承担国家、省、市研发项目十余项，获得发改委、工信部、科技厅等部门重大支持。

Obtained 94 patents, including 12 for invention,Wanshsin has undertaken more than 10 national, provincial or municipal R&D projects and received significant support from the National Development and Reform Commission,Ministry of Industry and Information Technology, Department of Science and Technology etc.

校企合作/School-Enterprice Cooperation

从日本聘请多名齿轮减速领域技术骨干，与中南大学、湖南大学等知名院校建立了稳定的产学研合作关系。

Wanshsin hired a top technology backbone troop in the field of gear reduction from Japan and established stable Industry-University-Research cooperative relations with well-known universities such as Central South University and Hunan University.

二、品质卓越

Outstanding Quality Control

① 行业率先后用先进的汽车行业《产品质量先期策划》的企业、五大工具APQP、PPAP、FMEA、MSA、SPC齐上阵，做到产品研发阶段的事前质量策划。

Wanshsin is one of the first in the industry to apply advanced auto industry level quality control "Advanced Product Quality Planning" and the Five tools of quality control: APQP, PPAP, FMEA, MSA, SPC to achieve the prior planning in the product R&D stage. nited States, Japan, Germany, so as to fully verify the product performance and function in the R&D stage and ensure the guaranteed quality before & under production.

② 制程中，配备了大量从美国、日本、德国进口的检测/检验设备，做到研发阶段产品性能、功能的充分验证，以确保投产前的质量保障。

Equipped with a large number of testing/inspection equipment imported from the United States, Japan, Germany, so as to fully verify the product performance and function in the R&D stage and ensure the guaranteed quality before & under production.

三、制造先进

Advanced Manufacture Ability

设备总值超过1.6亿元，拥有200余台先进国内外加工设备，制造能力处于国内领先地位。年产电机、减速机产品80余万套。

Wanshsin's manufacturing capacity is at the leading position in China with over 200 sets of advanced domestic and foreign processing equipment that value more than USD25 million, annual output of motor, reducer products is more than 800,000 sets.

四、服务快速

Speedy Comprehensive Service

全国服务经销网点达950+。其中中型减速机在细分市场占有率达20%，位居行业前列。

Wanshsin has more than 950 national service distribution outlets, especially to deserve to be mentioned, the medium reducer occupies over 20% national market share in the segment, ranking on the forefront of the industry.

仓储库存：自建仓储系统，自备2亿元零部件库存，满足各类型号产品快速交付。

Stock: Own self-built storage system consists of over USD32 million full spare parts inventory to ensure fast delivery.

交付周期：常规产品从下单到交付，只需3-5天。非标产品，15天出货。

Lead-time: 3-5 working days for standard products; 15 working days for non-standard products.

物流运输：与国内多家TOP级物流服务商，共享运输渠道。

Logistics :Experienced with customs clearance of different countries and capable to provide relevant documents, such as certificate of origin, certified invoice, etc.

Cooperate with a number of freight companies to flexibly arrange shipment through various shipping channels;

售后服务：售后1刻钟响应，8小时处理，24小时解决。

After-sales service: after-sales response in 15 minutes, 8 hours processing, 24 hours to solve.

企业荣誉

Enterprise Honor



2019

- 国家高新技术企业
National high-tech enterprise

2021

- 长沙市企业践行“三高四新”战略百强榜
Changsha enterprises practice the strategy of "three high four new" top 100
- 湖南省“绿色工厂”
Hunan "Green Factory"
- “长沙市高精密减速器技术创新中心”
“Changsha High Precision Reducer Technology Innovation Center”

2020

- 国家工信部“专精特新”重点小巨人企业
Ministry of Industry and Information Technology of the People's Republic of China "specialized, special and new" key small giant enterprise

2022

- 湖南省企业技术中心
Hunan Enterprise Technology Center
- 湖南省减速机工程技术研究中心
2022 Hunan Reducer Engineering Technology Research Center

- 公司已获得授权专利94项,其中发明专利12项

- 产品通过3C、CE、特种设备、质量、环境、职业健康、知识产权贯标等多项认证

- The company has obtained 94 authorized patents, including 12 invention patents.
- The products has passed many certifications such as 3C, CE, special equipment, quality, environment, occupational health and intellectual property implementation.



MICRO GEAR MOTOR 微型减速机



订购方式

Selection

微型交流电机 MICRO AC MOTOR

■ 微型交流电机命名 MICRO AC MOTOR MODEL

60YS06WG/DV22□
1 2 3 4 5 6

1 机座号 Stand Code	2 名称代号 Name Code	4 转子轴形式代号 Rotor shaft form Code	5 电压代号 Voltage Code	6 派生代号 Derived Code
60、70、80、90、100	YS: 标准电机 STANDARD MOTOR YT: 调速电机 VARIABLE SPEED MOTOR YB: 电磁制动电机 ELECTROMAGNETIC BRAKE MOTOR YF: 调速电磁制动电机 VARIABLE SPEED ELECTROMAGNETIC BRAKE MOTOR YR: 阻尼电机 DAMPING MOTOR	G: 齿轴 GEAR SHAFT D: 圆轴 ROUND SHAFT	V11: 单相 SINGLE PHASE 110V V22: 单相 SINGLE PHASE 220V Y22: 三相 THREE PHASE 220V Y38: 三相 THREE PHASE 380V	X: 引线式 (线长 300MM) LEAD (LINE LENGTH 300 MM) T: 带热保护器 WITH THERMAL PROTECTOR H: 带接线盒 WITH TERMINAL BLOCK FF: 带电子风扇 (低温型) WITH ELECTRONIC FAN (LOW TEMPERATURE)

■ 减速箱型号命名 GEARBOX MODEL

60GK100H□
1 2 3 4 5

1 机座号 Stand Code	2 机型代号 Model Code	3 减速比代号 Reduction ratio Code	4 结构代号 Structure Code	5 派生代号 Derived Code
60、70、80、90、100、L80、L90、L100	GK: 6-25W 减速箱 GEARBOX GF: 40-200W 减速箱 GEARBOX GM: (80.90) 中间减速箱 (80.90) INTERMEDIATE GEARBOX	3、3.6... 200	H: 标准 STANDARD HE: 带耳型 EARED RT: 直角中实 RIGHT ANGLE SOLID RC: 直角中空 RIGHT ANGLE HOLLOW	K: 通孔 HOLE

■ 微型交流电机通用技术标准 MICRO AC MOTOR COMMON TECHNICAL STANDARDS

绝缘电阻	在常温，常湿下电机额定运转后，以DC500V兆欧表测量组与外壳的绝缘电阻应为100MΩ以上。
绝缘耐压	在常温，常湿下电机额定运转后，在绕组与外壳间施加50Hz或60Hz，1.5KV电压一分钟，无异常。
温升	在装上减速箱或同等散热板进行额定运转时，以电阻法测定其绕组温度上升值为75K以下。
绝缘等级	F级 (155℃)
过热保护装置	可内加过热保护装置 (自动复位型) 动作温度: 120℃±5℃ 复位温度: 82℃±15℃ (此功能需定)
使用环境温度	-10℃~+40℃ (无冻结)
使用环境湿度	85%以下 (无结露)

INSULATION RESISTANCE: After running at rated settings under normal temperature and humidity, the insulation resistance between the winding and the shell of the motor measured with a DC500V megger should be more than 100MΩ.

INSULATION VOLTAGE: After running at rated settings under normal temperature and humidity, apply 50Hz or 60Hz, 1.5KV between the winding and the shell for one minute, and the motor is normal.

TEMPERATURE RISE: When running at rated settings with gearbox or equivalent heat radiating plate installed, the temperature rise of the winding measured in resistance method is 75K or less.

INSULATION CLASS: F (155℃)

OVERHEATING PROTECTION DEVICE: With built-in thermal protection device (automatic reset type); operating temperature: 120±5℃; reset temperature: 82±15℃ (this feature should be customized)

AMBIENT TEMPERATURE: -10℃~+40℃ (no freezing)

AMBIENT HUMIDITY: Below 85% (no condensation)

微型直流电机 MICRO DC MOTOR

微型直流电机命名 MICRO DC MOTOR MODEL

60DC20GV24R16

1234567

1 机座号
Stand Code

60、70、80、90、100

2 DC直流电机系列
DC motor series

DC

3 功率代号
Power Code

10W、15W、20W、30W、
40W、60W、65W、70W、100W、
120W、200W、300W

4 转子轴形式代号
Rotor shaft form Code

G: 齿轴 GEAR SHAFT
D: 圆轴 ROUND SHAFT

5 电压代号
Voltage Code

V12、V24、V90、V180

6 转速
Speed

R16: 1600r/min
R18: 1800r/min

7 派生代号
Derived Code

X: 引线式(线长300MM) LEAD (LINE LENGTH 300 MM)

微型直流电机通用技术标准 MICRO DC MOTOR COMMON TECHNICAL STANDARDS

绝缘电阻

在常温常湿下，运转电机后，以DC500V的绝缘电阻来测量的金属线圈和电机外壳之间的绝缘电阻时，不小于100兆欧。

绝缘电压

在常温，常湿下，运转电机后，在电机的金属线圈和电机外壳之间，以1500V、50/60Hz，施压1分钟时没有任何问题。

温度上升

运转电机后，用电阻法来测量时，线圈组温度的上升数值在80℃以下。

绝缘等级

B级 (130℃)

使用温度

-10℃~+40℃(冰冻)

使用湿度

85%以下(没有结露的场所)

INSULATION RESISTANCE: After running under normal temperature and humidity, the insulation resistance between the metal coil and the shell of the motor measured with a DC500V megger should be more than 100MΩ.

INSULATION VOLTAGE: After running under normal temperature and humidity, apply 1500V, 50/60Hz between the metal coil and the shell for one minute, and the motor is normal.

TEMPERATURE RISE: After running the motor, the temperature rise of the coil winding measured in resistance method is 80℃ or less.

INSULATION CLASS: B (130℃)

OPERATING TEMPERATURE: -10~40℃ (no freezing)

AMBIENT HUMIDITY: Under 85%(no condensation)

通用参数

General Parameters

微型交流电机接线圈及运行电容外形尺寸 MICRO AC MOTOR WIRING DIAGRAM DIMENSIONS AND RUNNING CAPACITOR DIMENSIONS

接线图
Wiring diagram dimensions

运行电容(单相电机附件)外形尺寸
Running capacitor (single phase motor accessories)dimensions

型号 MODEL	电容/电压 CAPACITANCE VOLTAGE	外形尺寸 DIMENSIONS		
		W	T	H
6W	0.8μf/450V	37	11	25
	3 μf/250V	37	16	30
15W	1.5μf/450V	37	11	25
	6μf/250V	47	18	35
25W	2μf/450V	37	16	30
	8μf/250V	47	20	37
40W	3μf/450V	48	20	31
	12μf/250V	59	27	38
60W	4μf/450V	48	20	32
	16μf/250V	58	28	50
90W	5μf/450V	47	20	37
	20μf/250V	59	30	50
120W	6μf/450V	47	20	37
	24μf/250V	59	30	50
140W	8μf/450V	47	23	41
	32μf/250V	60	30	50
200W	10μf/450V	59	27	38
	40μf/250V	70	40	55

齿轮轴
GEAR SHAFT

圆轴
ROUND SHAFT

●顺时针旋转 CLOCKWISE ROTATION
将开关(SW)切换至FWD侧，则电机做顺时针旋转。
Turn the switch (SW) to FWD and the motor rotates clockwise.

●逆时针旋转 COUNTERCLOCKWISE ROTATION
将开关(SW)切换至REV侧，则电机做逆时针旋转；
若兑换U、V、W中任意两条，则电机做逆时针旋转。
Turn the switch (SW) to REV and the motor rotates counterclockwise; If any two of U, V and W are exchanged,

⚠注意 NOTE

- 旋转方向是指面对电机输出端，顺时针旋转为FWD，逆时针旋转为REV。
- 单相电机旋转方向的切换作业应在电机停止后进行。
- 切换旋转方向时，须等电机完全停止后进行，否则将可能无法切换旋转方向或是需花费较长时间方可切换。
- Rotation direction is facing the motor output terminal. The clockwise direction is FWD, and the counterclockwise direction is REV.
- The rotation direction of single phase motor should be switched when the motor is stopped.
- Switch the rotation direction only when the motor has stopped, or else it may be impossible to change or take longer time.

微型直流电机接线图 MICRO DC MOTOR WIRING DIAGRAM DIMENSIONS

接线图 Wiring diagram dimensions

电机给引线长度为300mm

The length of motor lead is about 300mm

齿轮轴
GEAR SHAFT

圆轴
ROUND SHAFT

微型交流电机

Micro AC Motor

6W

□60×60mm

各型号电机性能 MOTOR PERFORMANCE

型号 MODEL	最大输出 功率(W) MAXIMUM OUTPUT POWER	电压V VOLTAGE	频率Hz FREQUENCY	电流A CURRENT	调速范围 r/min SPEED RANGE	起动转矩 mN·m START TORQUE	额定转矩(mN·m) RATED TORQUE		运行电容 RUNNING CAPACITOR
							1200r/min	90r/min	
齿轮轴 GEAR SHAFT 60YS06GV11 60YR06GV11 60YT06GV11 60YB06GV11	6	Single phase 单相 110	50Hz	0.23	90-1300	38	47	30	3μf/250V
圆轴 ROUND SHAFT 60YS06DV11 60YR06DV11 60YT06DV11 60YB06DV11			60Hz	0.21	90-1600	40	50	30	
齿轮轴 GEAR SHAFT 60YS06GV22 60YR06GV22 60YT06GV22 60YB06GV22			50Hz	0.11	90-1300	38	47	32	
圆轴 ROUND SHAFT 60YS06DV22 60YR06DV22 60YT06DV22 60YB06DV22			60Hz	0.10	90-1600	40	50	32	

- 虽然调速电机的调速范围为：50Hz...90~1300r/min；60Hz...90~1600r/min。但由于低速时(< 400r/min)，电机转矩下降较多，易发生过载，且电机直连风扇冷却效果差，易发热，因此必须预留足够的功率余量，并且不要经常工作在低速区。因此电机最佳调速范围为：50Hz...400~1300r/min；60Hz...400~1600r/min。
- 在断开电源的同时，电机瞬间停止关保持负载。

- Although the speed range of the motor is 50Hz, 90~1300r/min, 60Hz, 90~1600r/min, it easily causes overload and the cooling effect of the motor fan is poor if the speed is too low (<400r/min) and the motor torque decreases too much; therefore, please keep sufficient power margin and avoid operating in low speed section frequently. The optimal speed range of the motor is 50Hz, 400~1300r/min, 60Hz, 400~1600r/min.
- When the power is cut off, the motor will stop immediately and hold the load.

减速箱减速比性能对照表 REDUCTION RATIO PERFORMANCE CHART


减速比REDUCTION RATIO	3	3.6	5	6	7.5	10	12.5	15	18	20	25	30
50Hz 最高转速r/min Max output speed	433	361	260	217	173	130	104	87	72	65	52	43
额定转矩N·m Rated torque	0.13	0.15	0.22	0.26	0.33	0.44	0.55	0.66	0.79	0.88	1.10	1.32
60Hz 最高转速r/min Max output speed	533	444	320	267	213	160	128	107	89	80	64	53
额定转矩N·m Rated torque	0.11	0.13	0.18	0.22	0.28	0.37	0.46	0.55	0.66	0.73	0.92	1.10
减速比REDUCTION RATIO	36	40	50	60	75	90	100	120	150	180	200	
50Hz 最高转速r/min Max output speed	36	33	26	22	17	14	13	11	9	7	7	
额定转矩N·m Rated torque	1.59	1.76	2.06	2.18	2.42	3	3	3	3	3	3	
60Hz 最高转速r/min Max output speed	44	40	32	27	21	18	16	13	11	9	8	
额定转矩N·m Rated torque	1.33	1.47	1.71	1.82	2.02	2.42	2.65	3	3	3	3	

- 表中转速是以电机的平均转速(50Hz:1300r/min、60Hz:1600r/min)为基数除以减速比而算出的数值。
- 实际转速随负载大小而少量变化，变化范围为±8%左右。
- The speed in the table is the value of average motor speed (50Hz: 1300r/min, 60Hz: 1600r/min) divided by the reduction ratio.
- The actual speed changes according to the load (±8%).

外形尺寸(CAD) DIMENSIONS


6YS/YR01

圆轴电机 重量:0.8kg
Round-axis motor,weight:0.8kg

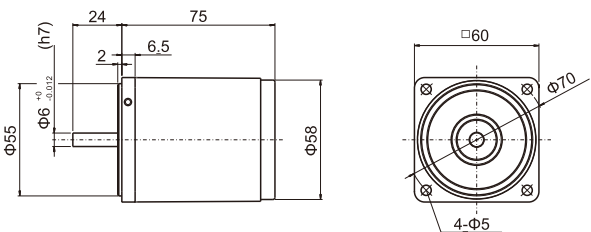


6YS/YR02

组合:电机+标准减速机(减速比:1:3~200) 重量:1.1kg
Combination: motor+standard gearbox(reduction ratio:1:3~200), weight:1.1kg

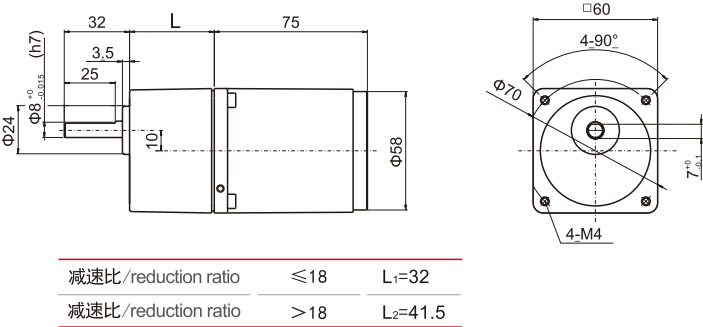


6YT01

圆轴电机 重量:0.9kg
Round-axis motor,weight:0.9kg

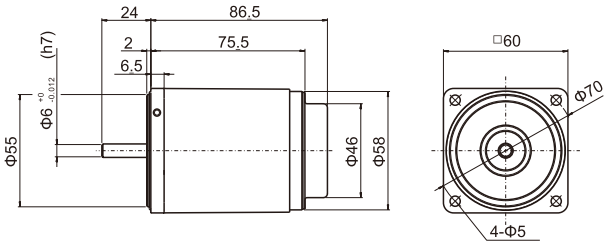


6YT02

组合:电机+标准减速机(减速比:1:3~200) 重量:1.1kg
Combination: motor+standard gearbox(reduction ratio:1:3~200), weight:1.1kg

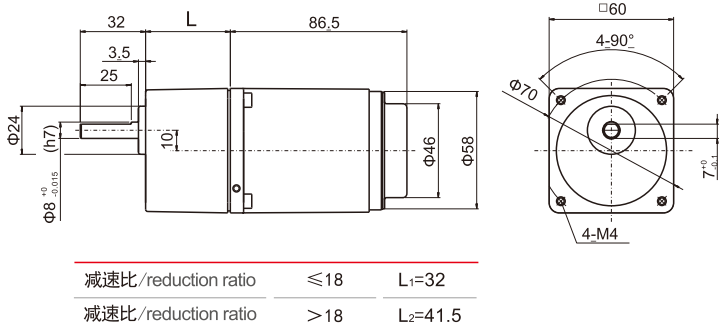


6YB01

圆轴电机 重量:1.2kg
Round-axis motor,weight:1.2kg

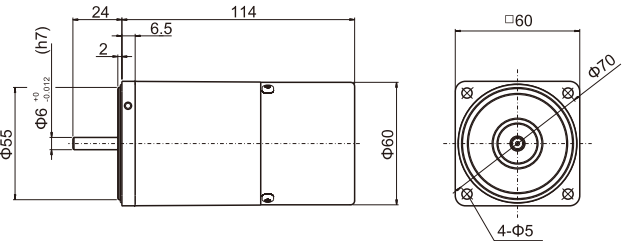

6YB02

组合:电机+标准减速机(减速比:1:3~200) 重量:1.5kg
Combination: motor+standard gearbox(reduction ratio:1:3~200), weight:1.5kg

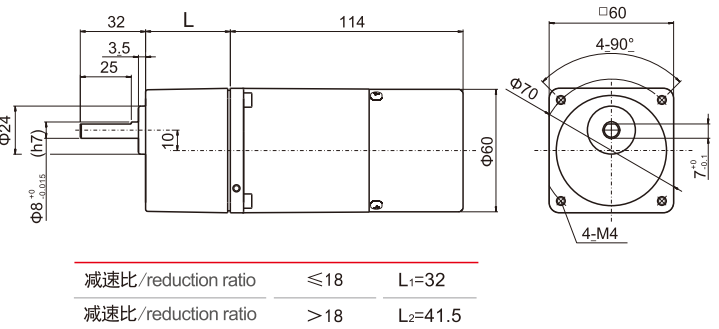

15W

□70×70mm

各型号电机性能 MOTOR PERFORMANCE

型号 MODEL		最大输出 功率(W) MAXIMUM OUTPUT POWER	电压V VOLTAGE	频率Hz FREQUENCY	电流A CURRENT	调速范围 r/min SPEED RANGE	起动转矩 mN·m START TORQUE	额定转矩(mN·m) RATED TORQUE		运行电容 RUNNING CAPACITOR
								1200r/min	90r/min	
齿轮轴 GEAR SHAFT	70YS15GV11	15	Single phase 单相 110	50Hz	0.39	90-1300	70	125	45	6μf/250V
	70YR15GV11									
	70YT15GV11									
	70YB15GV11									
圆轴 ROUND SHAFT	70YS15DV11	15	Single phase 单相 110	60Hz	0.35	90-1600	65	125	45	6μf/250V
	70YR15DV11									
	70YT15DV11									
	70YB15DV11									
齿轮轴 GEAR SHAFT	70YS15GV22	15	Single phase 单相 220	50Hz	0.20	90-1300	70	125	40	1.5μf/450V
	70YR15GV22									
	70YT15GV22									
	70YB15GV22									
圆轴 ROUND SHAFT	70YS15DV22	15	Single phase 单相 220	60Hz	0.17	90-1600	65	125	40	1.5μf/450V
	70YR15DV22									
	70YT15DV22									
	70YB15DV22									

- 虽然调速电机的调速范围为：50Hz...90~1300r/min；60Hz...90~1600r/min。但由于低速时(<400r/min)，电机转矩下降较多，易发生过载，且电机直连风扇冷却效果差，易发热，因此必须预留足够的功率余量，并且不要经常工作在低速区。因此电机最佳调速范围为：50Hz...400~1300r/min；60Hz...400~1600r/min。
- 在断开电源的同时，电机瞬间停止关保持负载。

- Although the speed range of the motor is 50Hz, 90~1300r/min, 60Hz, 90~1600r/min, it easily causes overload and the cooling effect of the motor fan is poor if the speed is too low (<400r/min) and the motor torque decreases too much; therefore, please keep sufficient power margin and avoid operating in low speed section frequently. The optimal speed range of the motor is 50Hz, 400~1300r/min, 60Hz, 400~1600r/min.
- When the power is cut off, the motor will stop immediately and hold the load.

减速箱减速比性能对照表 REDUCTION RATIO PERFORMANCE CHART

减速比REDUCTION RATIO	3	3.6	5	6	7.5	10	12.5	15	18	20	25	30
50Hz 最高转速r/min Max output speed	433	361	260	217	173	130	104	87	72	65	52	43
额定转矩N·m Rated torque	0.30	0.36	0.50	0.60	0.74	0.99	1.24	1.49	1.79	1.98	2.31	2.78
60Hz 最高转速r/min Max output speed	533	444	320	267	213	160	128	107	89	80	64	53
额定转矩N·m Rated torque	0.25	0.30	0.41	0.50	0.62	0.83	1.03	1.24	1.49	1.65	1.93	2.31
减速比REDUCTION RATIO	36	40	50	60	75	90	100	120	150	180	200	
50Hz 最高转速r/min Max output speed	36	33	26	22	17	14	13	11	9	7	7	
额定转矩N·m Rated torque	3.33	3.70	4.63	5	5	5	5	5	5	5	5	
60Hz 最高转速r/min Max output speed	44	40	32	27	21	18	16	13	11	9	8	
额定转矩N·m Rated torque	2.78	3.09	3.86	4.35	5	5	5	5	5	5	5	

- 表中转速是以电机的平均转速(50Hz:1300r/min、60Hz:1600r/min)为基数除以减速比而算出的数值。
- 实际转速随负载大小而少量变化，变化范围为±8%左右。
- The speed in the table is the value of average motor speed (50Hz: 1300r/min, 60Hz: 1600r/min) divided by the reduction ratio.
- The actual speed changes according to the load (±8%).



标准减速箱
STANDARD GEARBOX
70GK □H

减速箱型号中的□为减速比的数值


速比: 1:3~200

□ in gearbox model indicates the reduction ratio (1:3~200)

外形尺寸 (CAD) DIMENSIONS


15YS/YR01

圆轴电机 重量:1.1kg
Round-axis motor,weight:1.1kg

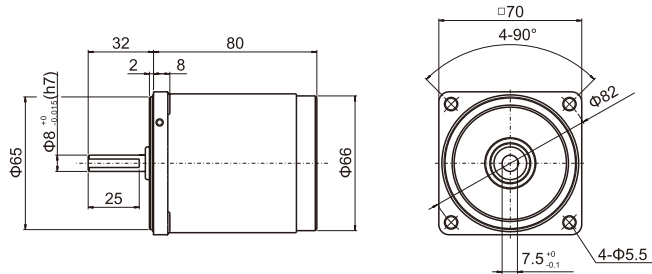

15YS/YR02


组合:电机+标准减速机(减速比:1:3~200) 重量:1.6kg
Combination: motor+standard gearbox(reduction ratio:1:3~200), weight:1.6kg

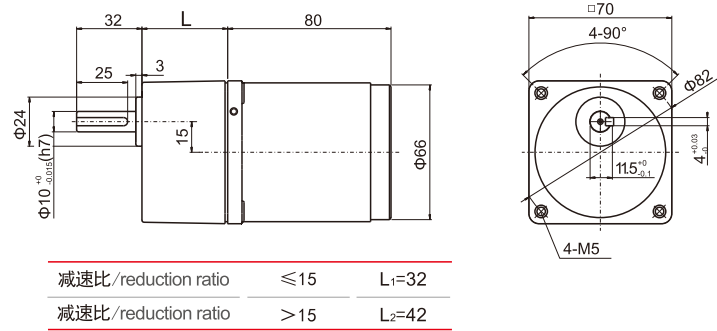

减速比/reduction ratio	≤15	L ₁ =32
减速比/reduction ratio	>15	L ₂ =42


15YT01

圆轴电机 重量:0.9kg
Round-axis motor,weight:0.9kg

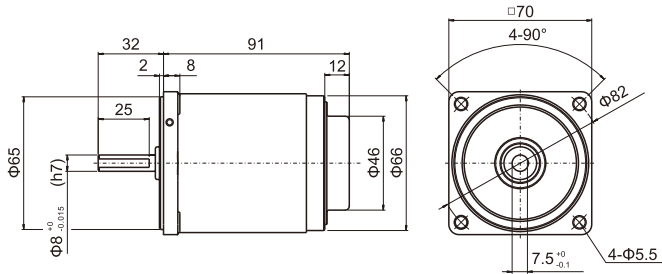

15YT02


组合:电机+标准减速机(减速比:1:3~200) 重量:1.2kg
Combination: motor+standard gearbox(reduction ratio:1:3~200), weight:1.2kg

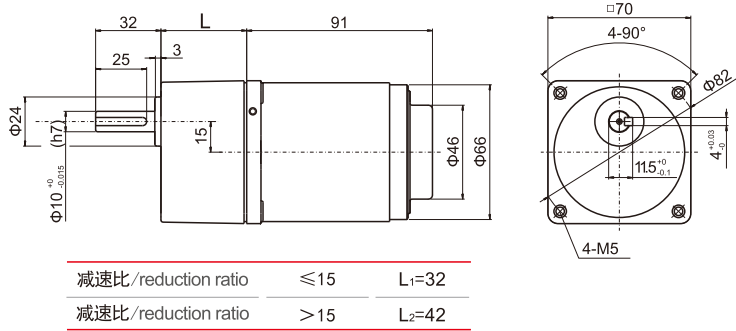

减速比/reduction ratio	≤15	L ₁ =32
减速比/reduction ratio	>15	L ₂ =42


15YB01

圆轴电机 重量:1.1kg
Round-axis motor,weight:1.1kg

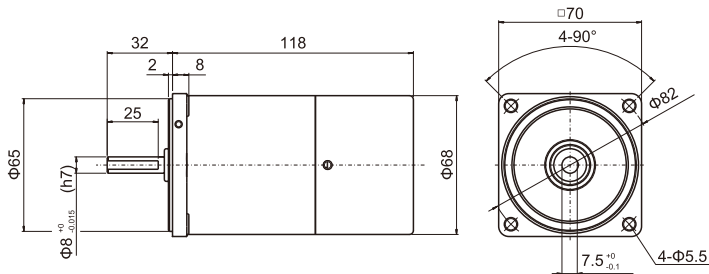

15YB02

组合:电机+标准减速机(减速比:1:3~200) 重量:2kg
Combination: motor+standard gearbox(reduction ratio:1:3~200), weight:2kg

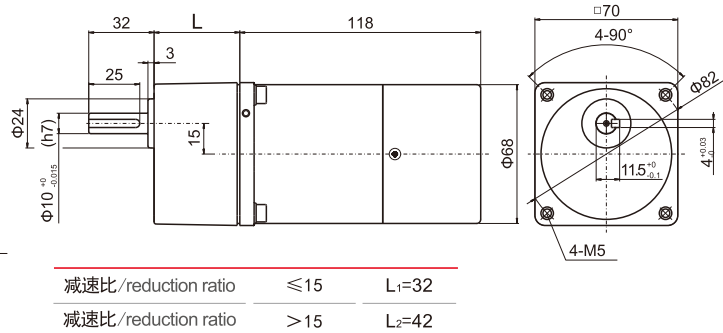

减速比/reduction ratio	≤15	L ₁ =32
减速比/reduction ratio	>15	L ₂ =42

25W

□80×80mm

各型号电机性能 MOTOR PERFORMANCE

型号 MODEL				最大输出 功率(W) MAXIMUM OUTPUT POWER	电压V VOLTAGE	频率Hz FREQUENCY	电流A CURRENT	调速范围 r/min SPEED RANGE	起动转矩 mN·m START TORQUE	额定转矩(mN·m) RATED TORQUE		运行电容 RUNNING CAPACITOR
齿轮轴 GEAR SHAFT	80YS25GV11 80YT25GV11	80YR25GV11 80YB25GV11		25	Single phase 单相 110	50Hz	0.53	90-1300	145	170	45	8μf/250V
						60Hz	0.48	90-1600	120	170	45	
齿轮轴 GEAR SHAFT	80YS25GV22 80YR25GV22	80YT25GV22 80YB25GV22		25	Single phase 单相 220	50Hz	0.25	90-1300	145	205	50	2μf/450V
						60Hz	0.23	90-1600	120	205	50	
齿轮轴 GEAR SHAFT	80YS25GY22 80YB25GY22			25	Three phase 三相 220	50Hz	0.25	90-1300	250	195		
						60Hz	0.23	90-1600	205	160		
齿轮轴 GEAR SHAFT	80YS25GY38 80YB25GY38			25	Three phase 三相 380	50Hz	0.14	90-1300	250	195		
						60Hz	0.13	90-1600	205	160		

•虽然调速电机的调速范围为：50Hz...90~1300r/min；60Hz...90~1600r/min。但由于低速时(<400r/min)，电机转矩下降较多，易发生过载，且电机直连风扇冷却效果差，易发热，因此必须预留足够的功率余量，并且不要经常工作在低速区。因此电机最佳调速范围为：50Hz...400~1300r/min；60Hz...400~1600r/min。

•在断开电源的同时，电机瞬间停止关保持负载。

•Although the speed range of the motor is 50Hz, 90~1300r/min, 60Hz, 90~1600r/min, it easily causes overload and the cooling effect of the motor fan is poor if the speed is too low (<400r/min) and the motor torque decreases too much; therefore, please keep sufficient power margin and avoid operating in low speed section frequently. The optimal speed range of the motor is 50Hz, 400~1300r/min, 60Hz, 400~1600r/min.

•When the power is cut off, the motor will stop immediately and hold the load.

减速箱减速比性能对照表 REDUCTION RATIO PERFORMANCE CHART

减速比 REDUCTION RATIO		3	3.6	5	6	7.5	10	12.5	15	18	20	25	30
50Hz	最高转速r/min Max output speed	433	361	260	217	173	130	104	87	72	65	52	43
	额定转矩N·m Rated torque	0.50	0.60	0.83	0.99	1.24	1.65	1.95	2.34	2.81	3.12	3.90	4.68
60Hz	最高转速r/min Max output speed	533	444	320	267	213	160	128	107	89	80	64	53
	额定转矩N·m Rated torque	0.41	0.50	0.69	0.83	1.03	1.38	1.63	1.95	2.34	2.60	3.25	3.90
减速比 REDUCTION RATIO		36	40	50	60	75	90	100	120	150	180	200	
50Hz	最高转速r/min Max output speed	36	33	26	22	17	14	13	11	9	7	7	
	额定转矩N·m Rated torque	5.62	6.24	6.89	8	8	8	8	8	8	8	8	
60Hz	最高转速r/min Max output speed	44	40	32	27	21	18	16	13	11	9	8	
	额定转矩N·m Rated torque	4.68	5.20	5.74	6.88	8	8	8	8	8	8	8	

•表中转速是以电机的平均转速(50Hz:1300r/min、60Hz:1600r/min)为基数除以减速比而算出的数值。

•实际转速随负载大小而少量变化，变化范围为±8%左右。

•The speed in the table is the value of average motor speed (50Hz: 1300r/min, 60Hz: 1600r/min) divided by the reduction ratio.

•The actual speed changes according to the load (±8%).



减速箱型号中的□为减速比的数值 速比: 1:3~200;中间减速箱:(1 : 10)


□ in gearbox model indicates the reduction ratio (1:3~200);intermediate gearbox:(1 : 10)

外形尺寸 (CAD) DIMENSIONS

25YS/YR01

圆轴电机 重量:1.6kg


Round-axis motor,weight:1.6kg

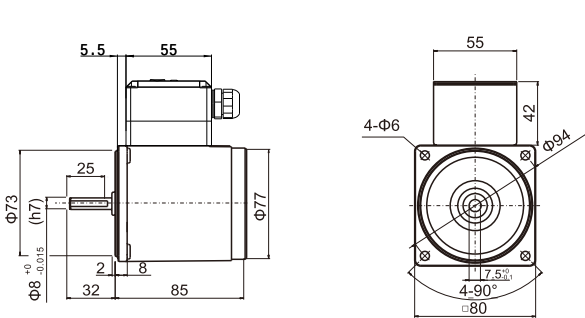

25YS/YR02

组合:电机+标准减速机(减速比:1:3~200) 重量:2.3kg


Combination: motor+standard gearbox(reduction ratio:1:3~200), weight:2.3kg

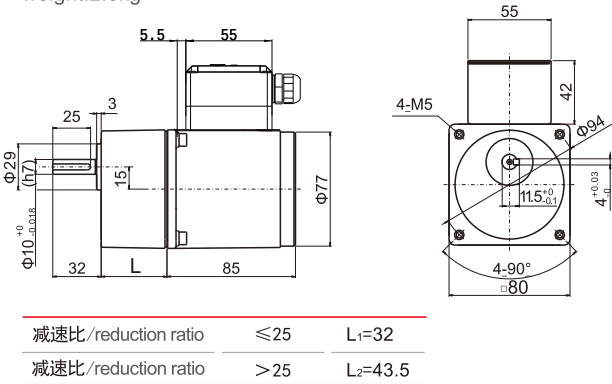

25YS/YR03

组合:电机+中间减速箱+标准减速机(减速比:1:200~1800) 重量:2.8kg


Combination: motor+Intermediate gearbox+standard gearbox(reduction ratio:1:200~1800),weight:2.8kg

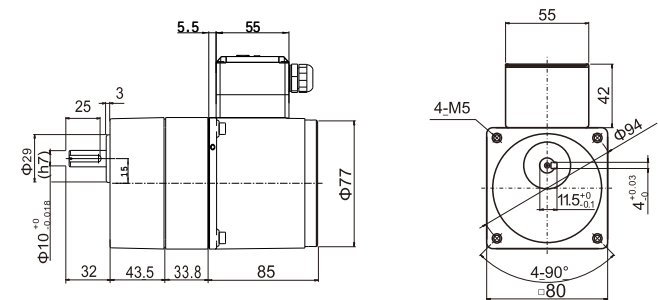

25YS/YR04

组合:电机+直角中实减速箱(减速比:1:3~200) 重量:3.8kg

Combination: motor+right angle solid gearbox(reduction ratio:1:3~200), weight:3.8kg

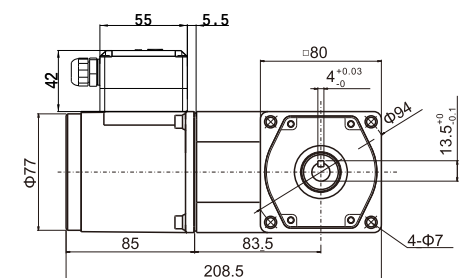


25YS/YR05


组合:电机+中间减速箱+直角中实减速箱

(减速比:1:200~1800) 重量:4.3kg

Combination: motor+intermediate gearbox+right angle solid gearbox(reduction ratio: 1 : 200~1800),weight:4.3kg



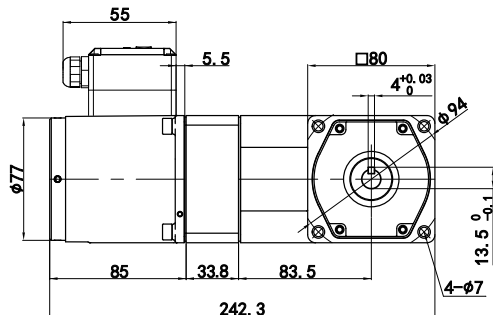


外形尺寸 (CAD) DIMENSIONS

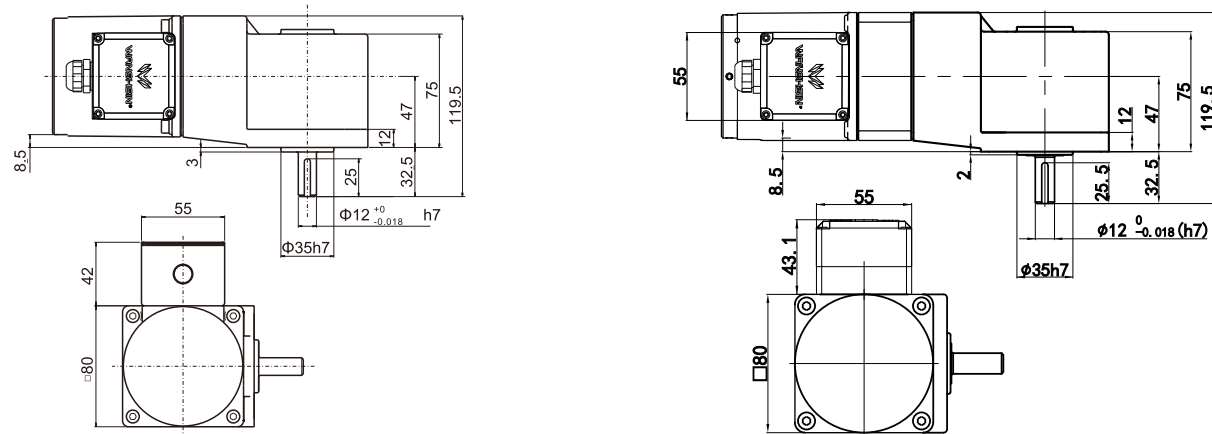




25YS/YR06

组合:电机+直角中空减速箱(减速比:1:3~200) 重量:3.7kg
Combination: motor+right angle hollow gearbox(reduction ratio:1:3~200),
weight:3.7kg

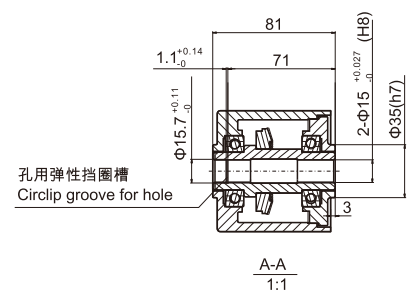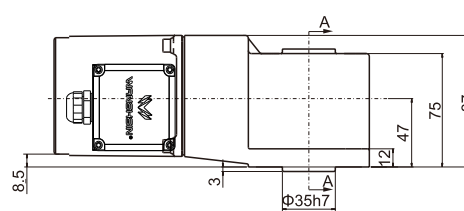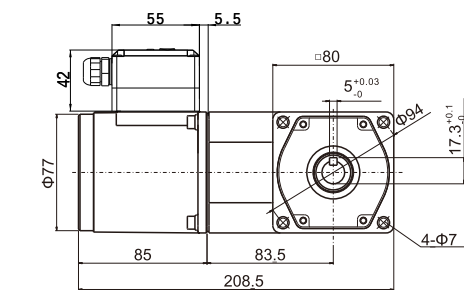

25YS/YR07


组合:电机+中间减速箱+直角中空减速箱
(减速比:1:200~1800) 重量:4.2kg
Combination: motor+intermediate gearbox+right angle hollow gearbox
(reduction ratio: 1:200~1800), weight: 4.2kg

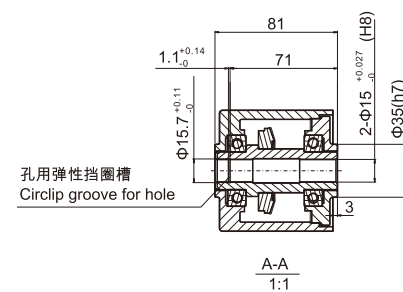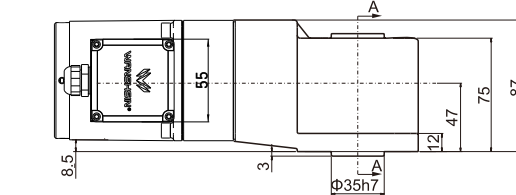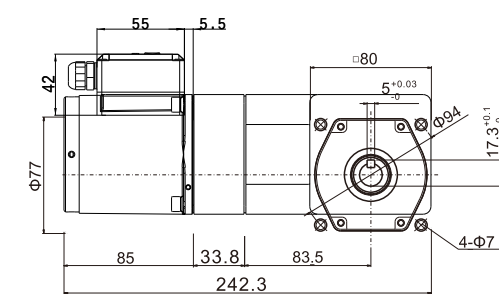

外形尺寸 (CAD) DIMENSIONS


25YT01

圆轴电机 重量:1.7kg
Round-axis motor,weight:1.7kg

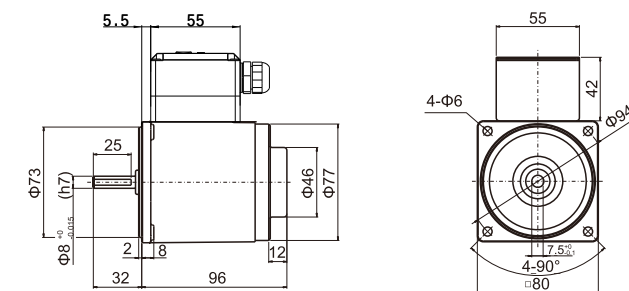


25YT03

组合:电机+中间减速箱+标准减速机(减速比:1:200~1800) 重量:2.9kg
Combination: motor+intermediate gearbox+standard gearbox(reduction ratio:1:200~1800), weight:2.9kg

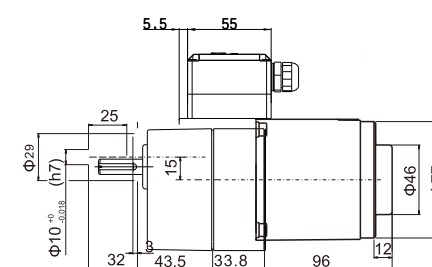


25YT04

组合:电机+直角中实减速箱(减速比:1:3~200) 重量:3.8kg
Combination: motor+right angle solid gearbox(reduction ratio:1:3~200),
weight:3.8kg

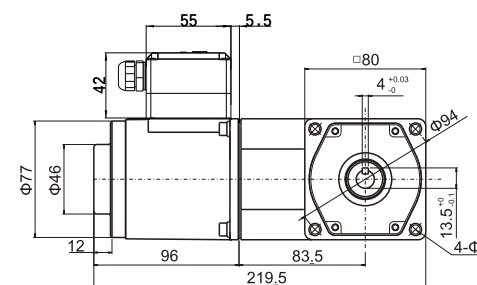

25YT02


组合:电机+标准减速机(减速比:1:3~200) 重量:2.4kg
Combination: motor+standard gearbox(reduction ratio:1:3~200),
weight:2.4kg

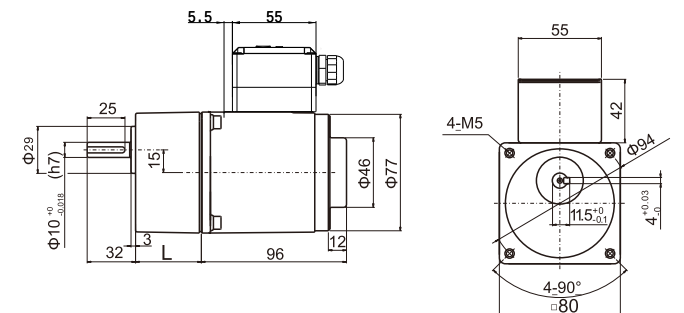


减速比/reduction ratio	≤ 25	$L_1=32$
减速比/reduction ratio	> 25	$L_2=43.5$

25YT05

组合:电机+中间减速箱+直角中实减速箱
(减速比:1:200~1800) 重量:4.3kg
Combination: motor+intermediate gearbox+right angle solid
gearbox(reduction ratio: 1:200~1800), weight: 4.3kg

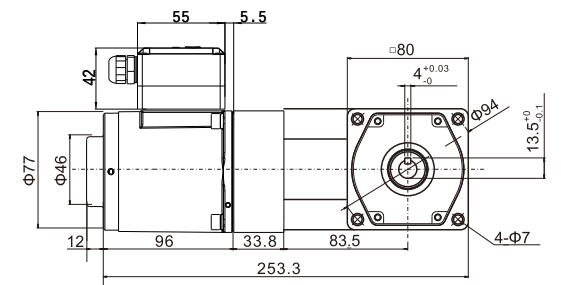




外形尺寸 (CAD) DIMENSIONS

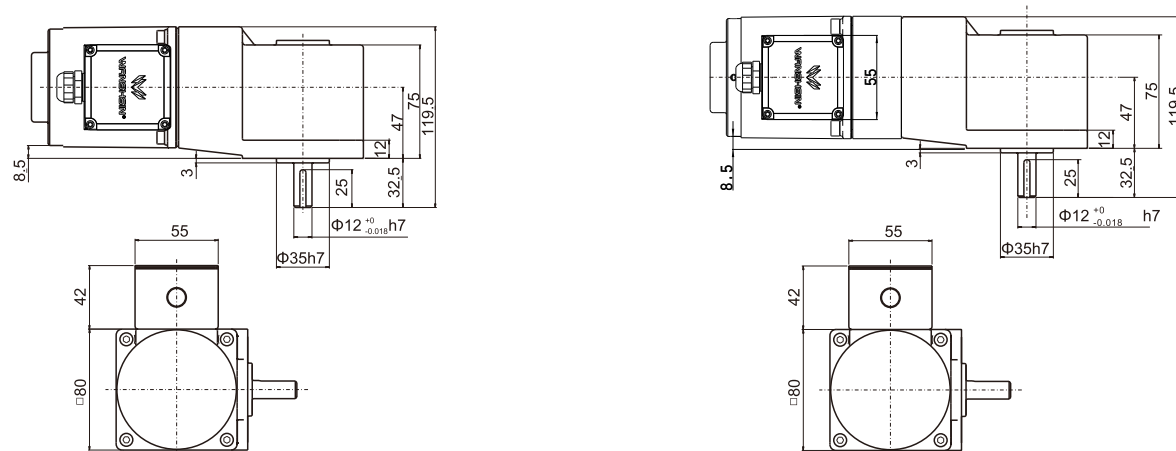

25YT06

组合:电机+直角中空减速箱(减速比:1:3~200) 重量:3.7kg




Combination: motor+right angle hollow gearbox(reduction ratio:1:3~200),
weight:3.7kg

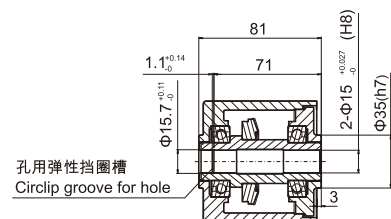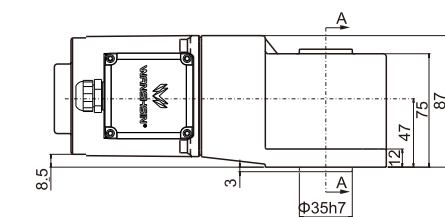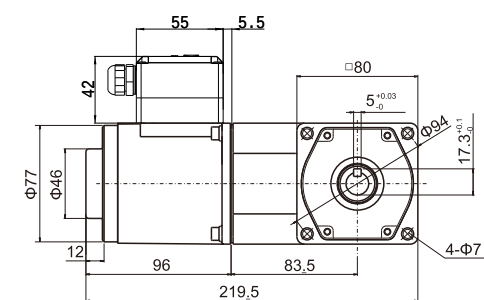

25YT07

组合:电机+中间减速箱+直角中空减速箱

(减速比:1:200~1800) 重量:4.2kg
Combination: motor+intermediate gearbox+right angle hollow gearbox
(reduction ratio: 1:200~1800), weight: 4.2kg

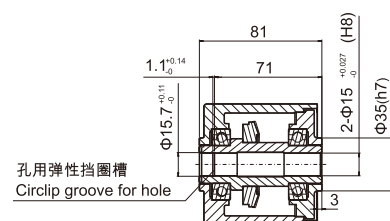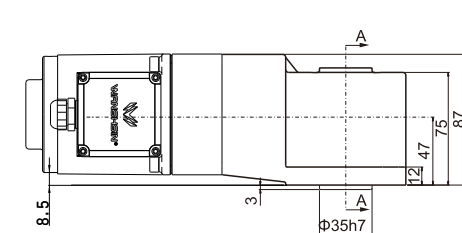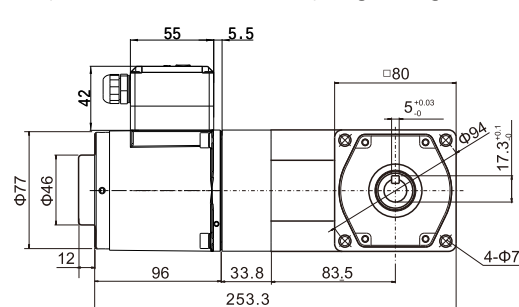


外形尺寸 (CAD) DIMENSIONS

25YB01

圆轴电机 重量:2kg


Round-axis motor,weight:2kg

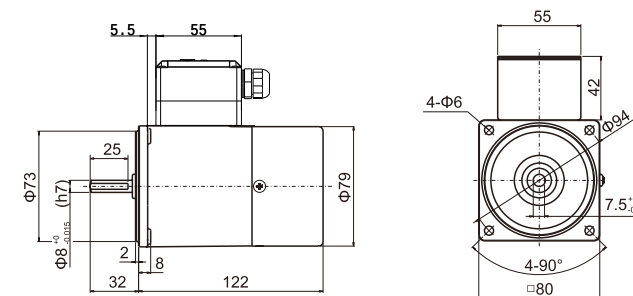

25YB02

组合:电机+标准减速机(减速比:1:3~200) 重量:2.7kg

Combination: motor+standard gearbox(reduction ratio:1:3~200),
weight:2.7kg


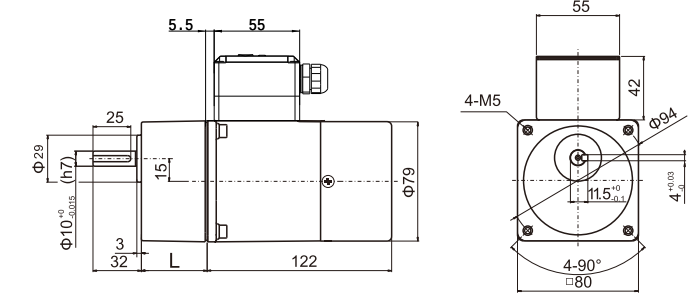


减速比/reduction ratio	≤ 25	$L_1=32$
减速比/reduction ratio	> 25	$L_2=43.5$

25YB03

组合:电机+中间减速箱+标准减速机(减速比:1:200~1800) 重量:3.2kg


Combination: motor+intermediate gearbox+standard gearbox(reduction ratio:1:200~1800),weight:3.2kg

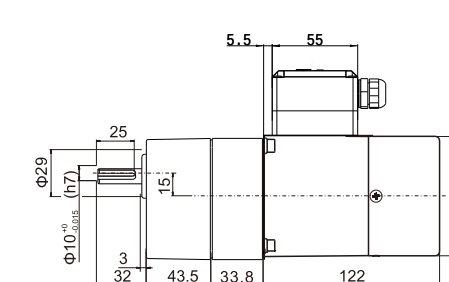

25YB04

组合:电机+直角中实减速箱(减速比:1:3~200) 重量:3.8kg


Combination: motor+right angle solid gearbox(reduction ratio:1:3~200),
weight:3.8kg

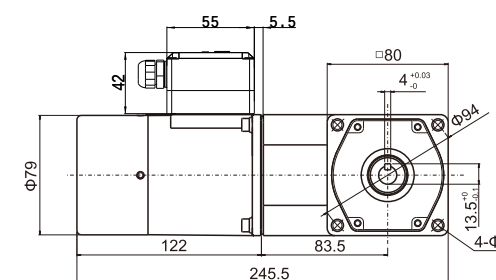


25YB05

组合:电机+中间减速箱+直角中实减速箱

Combination: motor+intermediate gearbox+right angle solid gearbox(reduction ratio:1:200~1800),weight:4.3kg



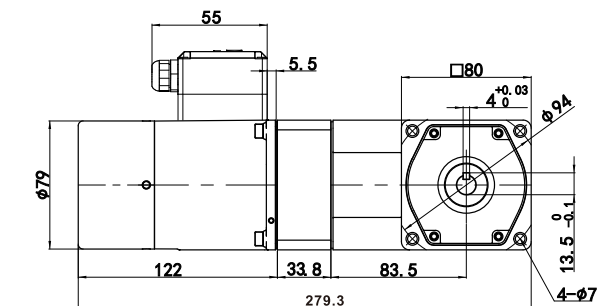


外形尺寸(CAD) DIMENSIONS

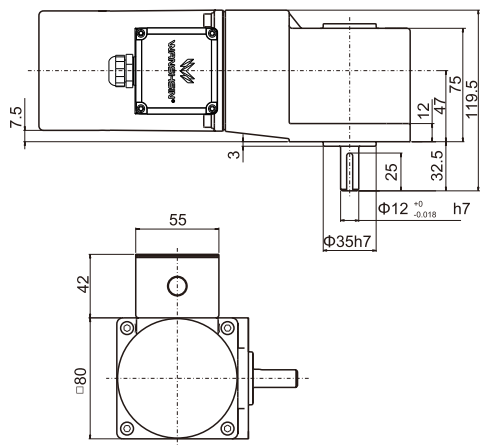



25YB06

组合:电机+直角中空减速箱(减速比:1:3~200) 重量:3.7kg
Combination: motor+right angle hollow gearbox(reduction ratio:1:3~200), weight:3.7kg

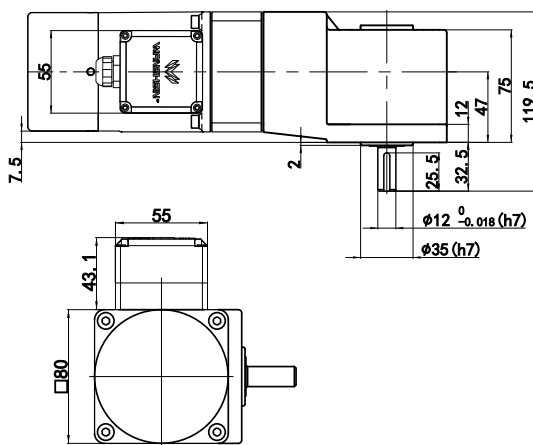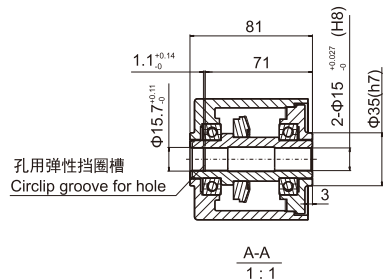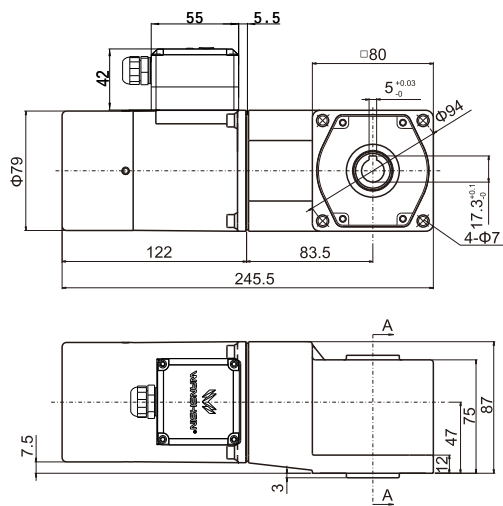

25YB07

组合:电机+中间减速箱+直角中空减速箱(减速比:1:200~1800) 重量:4.2kg
Combination: motor+intermediate gearbox+right angle hollow gearbox(reduction ratio:1:200~1800), weight:4.2kg

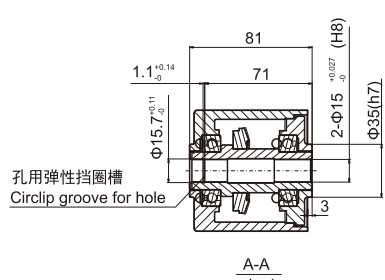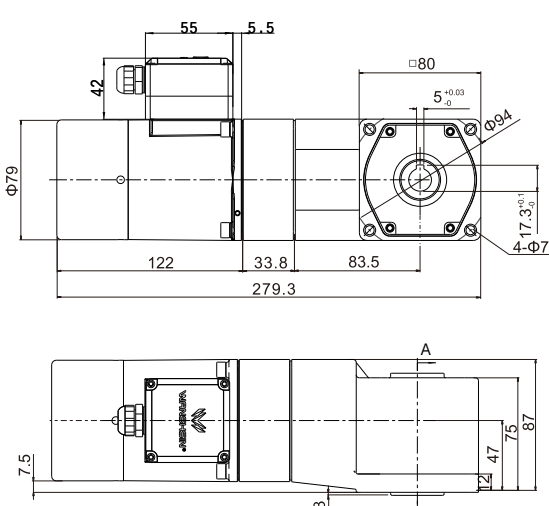

40W
60W

□90×90mm

各型号电机性能 MOTOR PERFORMANCE

型号 MODEL	最大输出 功率(W) MAXIMUM OUTPUT POWER	电压V VOLTAGE	频率Hz FREQUENCY	电流A CURRENT	调速范围 r/min SPEED RANGE	起动转矩 mN·m START TORQUE	额定转矩(mN·m) RATED TORQUE 1200r/min 90r/min	运行电容 RUNNING CAPACITOR
齿轮轴 GEAR SHAFT 90YS40GV11 90YR40GV11 90YT40GV11 90YF40GV11 90YB40GV11	40	Single phase 单相 110	50Hz	0.79	90-1300	235	300 65	12μf/250V
圆轴 ROUND SHAFT 90YS40DV11 90YR40DV11 90YT40DV11 90YF40DV11 90YB40DV11			60Hz	0.71	90-1600	180	260 70	
齿轮轴 GEAR SHAFT 90YS40GV22 90YR40GV22 90YT40GV22 90YF40GV22 90YB40GV22	40	Single phase 单相 220	50Hz	0.40	90-1300	235	320 65	3μf/450V
圆轴 ROUND SHAFT 90YS40DV22 90YR40DV22 90YT40DV22 90YF40DV22 90YB40DV22			60Hz	0.37	90-1600	180	260 70	
齿轮轴 GEAR SHAFT 90YS40GY22 90YB40GY22	40	Three phase 三相 220	50Hz	0.35	90-1300	403	310	
圆轴 ROUND SHAFT 90YS40DY22 90YB40DY22			60Hz	0.32	90-1600	338	260	
齿轮轴 GEAR SHAFT 90YS40GY38 90YB40GY38	40	Three phase 三相 380	50Hz	0.21	90-1300	403	310	
圆轴 ROUND SHAFT 90YS40DY38 90YB40DY38			60Hz	0.19	90-1600	338	260	
齿轮轴 GEAR SHAFT 90YS60GV11 90YR60GV11 90YT60GV11 90YF60GV11 90YB60GV11	60	Single phase 单相 110	50Hz	1.26	90-1300	350	490 200	12 μf/250V
圆轴 ROUND SHAFT 90YS60DV11 90YR60DV11 90YT60DV11 90YF60DV11 90YB60DV11			60Hz	1.14	90-1600	280	490 220	
齿轮轴 GEAR SHAFT 90YS60GV22 90YR60GV22 90YT60GV22 90YF60GV22 90YB60GV22	60	Single phase 单相 220	50Hz	0.62	90-1300	350	490 200	4μf/450V
圆轴 ROUND SHAFT 90YS60DV22 90YR60DV22 90YT60DV22 90YF60DV22 90YB60DV22			60Hz	0.57	90-1600	280	490 220	
齿轮轴 GEAR SHAFT 90YS60GY22 90YB60GY22	60	Three phase 三相 220	50Hz	0.53	90-1300	600	460	
圆轴 ROUND SHAFT 90YS60DY22 90YB60DY22			60Hz	0.48	90-1600	490	375	
齿轮轴 GEAR SHAFT 90YS60GY38 90YB60GY38	60	Three phase 三相 380	50Hz	0.32	90-1300	600	460	
圆轴 ROUND SHAFT 90YS60DY38 90YB60DY38			60Hz	0.29	90-1600	490	375	

虽然调速电机的调速范围为：50Hz...90~1300r/min；60Hz...90~1600r/min。但由于低速时(<400r/min)，电机转矩下降较多，易发生过载，且电机直连风扇冷却效果差，易发热，因此必须预留足够的功率余量，并且不要经常工作在低速区。因此电机最佳调速范围为：50Hz...400~1300r/min；60Hz...400~1600r/min。

在断开电源的同时，电机瞬间停止关保持负载。

Although the speed range of the motor is 50Hz, 90~1300r/min, 60Hz, 90~1600r/min, it easily causes overload and the cooling effect of the motor fan is poor if the speed is too low (<400r/min) and the motor torque decreases too much; therefore, please keep sufficient power margin and avoid operating in low speed section frequently. The optimal speed range of the motor is 50Hz, 400~1300r/min, 60Hz, 400~1600r/min.

When the power is cut off, the motor will stop immediately and hold the load.

减速箱减速比性能对照表 REDUCTION RATIO PERFORMANCE CHART

减速比 REDUCTION RATIO				3	3.6	5	6	7.5	10	12.5	15	18	20	25	30
40W	50Hz	最高转速r/min	Output bearing speed	433	361	260	217	173	130	104	87	72	65	52	43
		额定转矩N·m	Rated torque	0.77	0.92	1.28	1.53	1.92	2.56	3.20	3.83	4.60	5.11	5.73	6.88
	60Hz	最高转速r/min	Output bearing speed	533	444	320	267	213	160	128	107	89	80	64	53
		额定转矩N·m	Rated torque	0.64	0.77	1.07	1.28	1.60	2.13	2.66	3.20	3.83	4.26	4.78	5.73
60W	50Hz	最高转速r/min	Output bearing speed	433	361	260	217	173	130	104	87	72	65	52	43
		额定转矩N·m	Rated torque	1.19	1.43	1.98	2.38	2.98	3.97	4.35	5.22	6.27	6.96	8.26	9.92
	60Hz	最高转速r/min	Output bearing speed	533	444	320	267	213	160	128	107	89	80	64	53
		额定转矩N·m	Rated torque	0.99	1.19	1.65	1.98	2.48	3.31	3.63	4.35	5.22	5.80	6.89	8.26
减速比 REDUCTION RATIO				36	40	50	60	75	90	100	120	150	180	200	
40W	50Hz	最高转速r/min	Output bearing speed	36	33	26	22	17	14	13	11	9	7	7	
		额定转矩N·m	Rated torque	8.25	9.17	10	10	10	10	10	10	10	10	10	
	60Hz	最高转速r/min	Output bearing speed	44	40	32	27	21	18	16	13	11	9	8	
		额定转矩N·m	Rated torque	6.88	7.64	9.16	10	10	10	10	10	10	10	10	
60W	50Hz	最高转速r/min	Output bearing speed	36	33	26	22	17	14	13	11	9	7	7	
		额定转矩N·m	Rated torque	11.90	13.22	16.53	19.83	20	20	20	20	20	20	20	
	60Hz	最高转速r/min	Output bearing speed	44	40	32	27	21	18	16	13	11	9	8	
		额定转矩N·m	Rated torque	9.92	11.02	13.77	16.53	20	20	20	20	20	20	20	

表中转速是以电机的平均转速(50Hz:1300r/min、60Hz:1600r/min)为基数除以减速比而算出的数值。

The speed in the table is the value of average motor speed (50Hz: 1300r/min, 60Hz: 1600r/min) divided by the reduction ratio.



标准减速箱
STANDARD GEARBOX
90GF □H



带耳减速箱
EARED GEARBOX
90GF □HE



直角中空减速箱
RIGHT ANGLE HOLLOW GEARBOX
L90GF □RC




直角中实减速箱
RIGHT ANGLE SOLID GEARBOX
L90GF □RT

减速箱型号中的□为减速比的数值
速比：1:3~200
□ in gearbox model indicates the reduction ratio (1:3~200)

外形尺寸 (CAD) DIMENSIONS


40/60YS/YR/YT/YB/YF01

圆轴电机 重量:2.5kg
Round-axis motor,weight:2.5kg

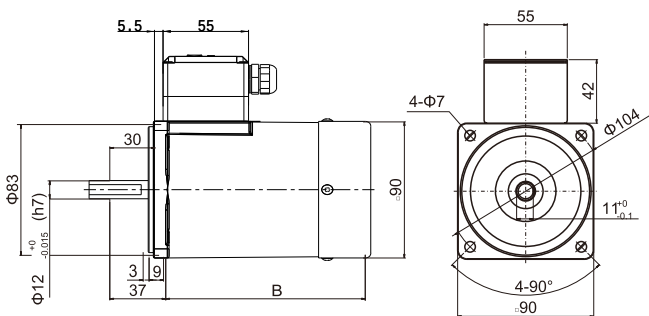

40/60YS/YR/YT/YB/YF02


组合:电机+标准减速机(减速比:1:3~200) 重量:3.7kg
Combination: motor+standard gearbox(reduction ratio:1:3~200), weight:3.7kg

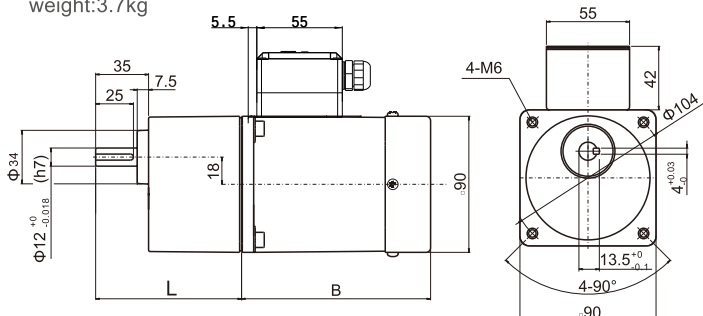

减速比/reduction ratio	≤10	L ₁ =77
减速比/reduction ratio	>10	L ₂ =96.5

40/60YS/YR/YT/YB/YF03


组合:电机+中间减速箱+标准减速机(减速比:1:200~1800) 重量:4.6kg
Combination: motor+intermediate gearbox+standard gearbox(reduction ratio:1:200~1800), weight:4.6kg

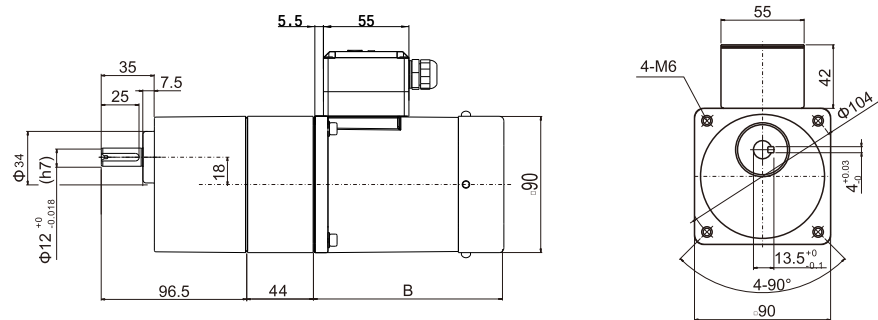

序号 No.	电机类型 Motor type	A	B	C
1	YS/YR	276.5	125	320.5
2	YT	287.5	136	331.5
3	YB	311.5	160	355.5
4	YF	323.5	172	367.5

40/60YS/YR/YT/YB/YF04


组合:电机+带耳减速机(减速比:1:3~200)
重量:3.7kg
Combination: motor+eared gear(reduction ratio:1:3~200), weight:3.7kg

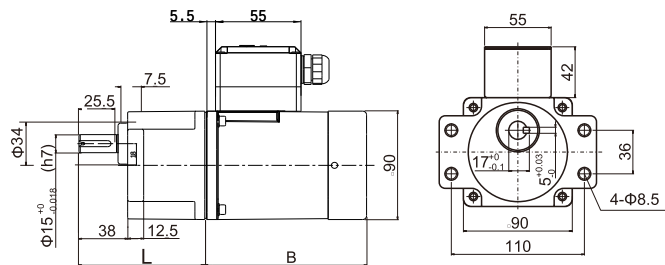

减速比/reduction ratio	≤10	L ₁ =80
减速比/reduction ratio	>10	L ₂ =99.5

40/60YS/YR/YT/YB/YF05



组合:电机+中间减速箱+带耳减速机(减速比:1:200~1800) 重量:4.6kg
Combination: motor+intermediate gearbox+eared gear(reduction ratio:1:200~1800), weight:4.6kg

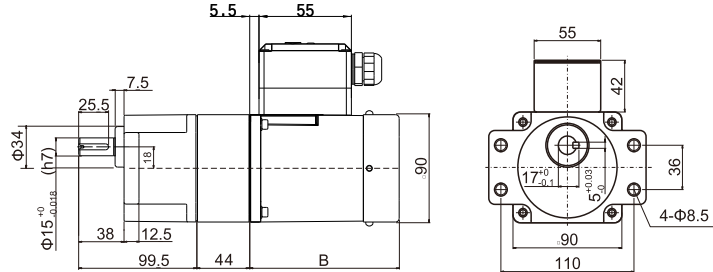

外形尺寸 (CAD) DIMENSIONS



40/60YS/YR/YT/YB/YF06

组合:电机+直角中实减速箱(减速比:1:3~200)
重量:5.4kg
Combination: motor+right angle solid gearbox(reduction ratio:1:3~200), weight:5.4kg

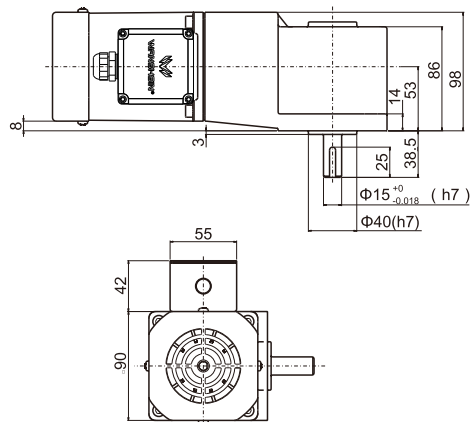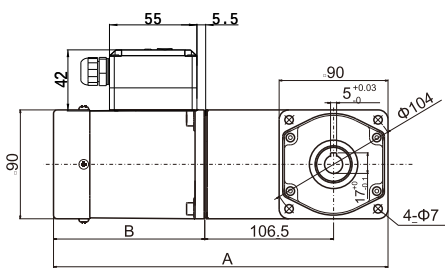


40/60YS/YR/YT/YB/YF07

组合:电机+中间减速箱+直角中实减速箱
(减速比:1:200~1800) 重量:6.3kg
Combination: motor+intermediate gearbox+right angle solid gearbox
(reduction ratio:1:200~1800),weight:6.3kg

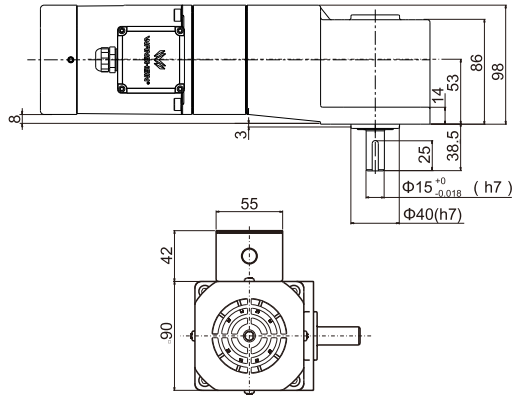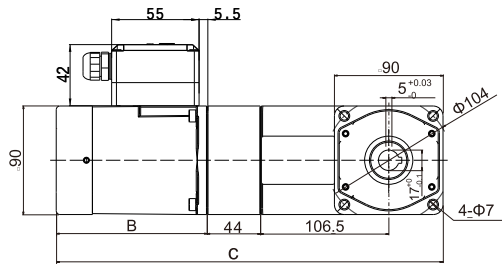


40/60YS/YR/YT/YB/YF08

组合:电机+直角中空减速箱(减速比:1:3~200) 重量:5.3kg
Combination: motor+right angle hollow gearbox(reduction ratio:1:3~200),
weight:5.3kg




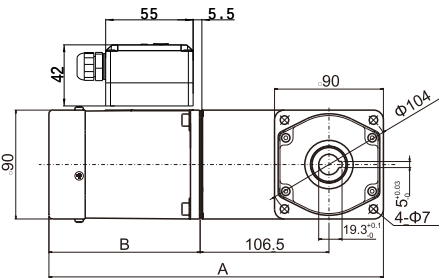


40/60YS/YR/YT/YB/YF09

组合:电机+中间减速箱+直角中空减速箱
(减速比:1:200~1800) 重量:6.2kg
Combination: motor+intermediate gearbox+right angle hollow gearbox
(reduction ratio:1:200~1800),weight:6.2kg

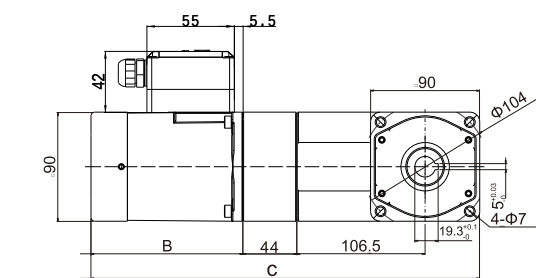

外形尺寸(CAD)DIMENSIONS

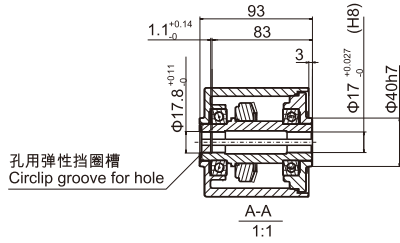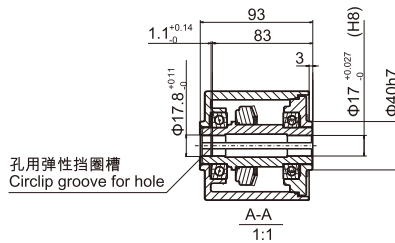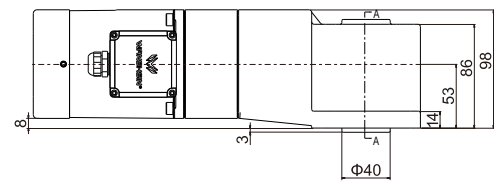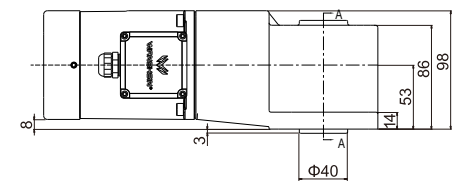

90W
120W

□90×90mm

各型号电机性能 MOTOR PERFORMANCE

型号 MODEL				最大输出 功率(W) MAXIMUM OUTPUT POWER	电压V VOLTAGE	频率Hz FREQUENCY	电流A CURRENT	调速范围 r/min SPEED RANGE	启动转矩 mN·m START TORQUE	额定转矩(mN·m) RATED TORQUE		运行电容 RUNNING CAPACITOR
										1200r/min	90r/min	
齿轮轴	GEAR SHAFT	90YS90GV11 90YR90GV11 90YT90GV11	90YB90GV11 90YF90GV11	90	Single phase 单相 110	50Hz	1.70	90-1300	525	710	200	20μf/250V
圆轴	ROUND SHAFT	90YS90DV11 90YR90DV11 90YT90DV11	90YB90DV11 90YF90DV11			60Hz	1.50	90-1600	420	710	200	
齿轮轴	GEAR SHAFT	90YS90GV22 90YR90GV22 90YT90GV22	90YB90GV22 90YF90GV22	90	Single phase 单相 220	50Hz	0.95	90-1300	525	710	200	5μf/450V
圆轴	ROUND SHAFT	90YS90DV22 90YR90DV22 90YT90DV22	90YB90DV22 90YF90DV22			60Hz	0.86	90-1600	420	710	200	
齿轮轴	GEAR SHAFT	90YS90GY22 90YB90GY22		90	Three phase 三相 220	50Hz	0.69	90-1300	910	700		
圆轴	ROUND SHAFT	90YS90DY22 90YB90DY22				60Hz	0.63	90-1600	730	560		
齿轮轴	GEAR SHAFT	90YS90GY38 90YB90GY38		90	Three phase 三相 380	50Hz	0.41	90-1300	910	700		
圆轴	ROUND SHAFT	90YS90DY38 90YB90DY38				60Hz	0.38	90-1600	730	560		
齿轮轴	GEAR SHAFT	90YS120GV11 90YR120GV11 90YT120GV11	90YB120GV11 90YF120GV11	120	Single phase 单相 110	50Hz	2.04	90-1300	720	840	300	24μf/250V
圆轴	ROUND SHAFT	90YS120DV11 90YR120DV11 90YT120DV11	90YB120DV11 90YF120DV11			60Hz	1.84	90-1600	600	840	300	
齿轮轴	GEAR SHAFT	90YS120GV22 90YR120GV22 90YT120GV22	90YB120GV22 90YF120GV22	120	Single phase 单相 220	50Hz	1.02	90-1300	720	840	300	6μf/450V
圆轴	ROUND SHAFT	90YS120DV22 90YR120DV22 90YT120DV22	90YB120DV22 90YF120DV22			60Hz	0.92	90-1600	600	840	300	
齿轮轴	GEAR SHAFT	90YS120GY22 90YB120GY22		120	Three phase 三相 220	50Hz	0.89	90-1300	1195	924		
圆轴	ROUND SHAFT	90YS120DY22 90YB120DY22				60Hz	0.81	90-1600	1014	750		
齿轮轴	GEAR SHAFT	90YS120GY38 90YB120GY38		120	Three phase 三相 380	50Hz	0.51	90-1300	1195	924		
圆轴	ROUND SHAFT	90YS120GY38 90YB120GY38				60Hz	0.45	90-1600	1014	750		

•虽然调速电机的调速范围为：50Hz...90~1300r/min；60Hz...90~1600r/min。但由于低速时(<400r/min)，电机转矩下降较多，易发生过载，且电机直连风扇冷却效果差，易发热，因此必须预留足够的功率余量，并且不要经常工作在低速区。因此电机最佳调速范围为：50Hz...400~1300r/min；60Hz...400~1600r/min。

•在断开电源的同时，电机瞬间停止关保持负载。

•Although the speed range of the motor is 50Hz, 90~1300r/min, 60Hz, 90~1600r/min, it easily causes overload and the cooling effect of the motor fan is poor if the speed is too low (<400r/min) and the motor torque decreases too much; therefore, please keep sufficient power margin and avoid operating in low speed section frequently. The optimal speed range of the motor is 50Hz, 400~1300r/min, 60Hz, 400~1600r/min.

•When the power is cut off, the motor will stop immediately and hold the load.

减速箱减速比性能对照表 REDUCTION RATIO PERFORMANCE CHART

[illegible]

■表中转速是以电机的平均转速(50Hz:1300r/min、60Hz:1600r/min)为基数除以减速比而算出的数值。

- 实际转速随负载大小而少量变化, 变化范围为 $\pm 8\%$ 左右。

▪The speed in the table is the value of average motor speed (50Hz: 1300r/min, 60Hz: 1600r/min) divided by the reduction ratio.

- The actual speed changes according to the load ($\pm 8\%$).




标准减速箱
STANDARD GEARBOX
90GF □H



带耳减速箱
EARED GEARBOX
90GF □HE



直角中空減速箱 RIGHT ANGLE HOLLOW GEARBOX L90GF □RC



中间减速箱
INTERMEDIATE GEARBOX
90GM10



直角中实减速箱 RIGHT ANGLE SOLID GEARBOX L90GF □RT

减速箱型号中的□为减速比的数值

速比: 1:3~200;中间减速箱: (1:10)



□ in gearbox model indicates the reduction ratio (1:3~200);MIDDLE GEARBOX:(1 : 10)

外形尺寸 (CAD) DIMENSIONS

90/120YS/YR/YT/YB/YF01

圆轴电箱 重量:3kg

Round-axis motor,weight:3kg


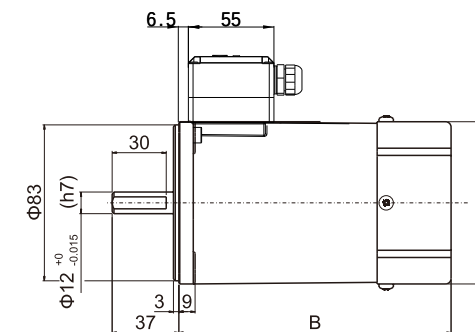


序号 No.	电机类型 Motor type	B
1	YS/YR	140
2	YT	151
3	YB	175
4	YF	187

90/120YS/YR/YT/YB/YF02

组合:电机+标准减速机(减速比:1:3~200) 重量:4.2kg

Combination: motor+standard gearbox(reduction ratio:1:3~200),weight:4.2kg


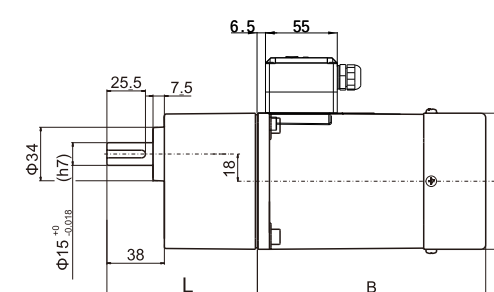


序号 No.	电机类型 Motor type	B	减速比 Reduction ratio	L
1	YS/YR	140	≤10	80
2	YT	151	>10	99.5
3	YB	175		
4	YF	187		

90/120YS/YR/YT/YB/YF03

组合:电机+中间减速箱+标准减速机(减速比:1:200~1800) 重量:5.1kg

Combination: motor+intermediate gearbox+standard gearbox(reduction ratio:1:200~1800),weight:5.1kg

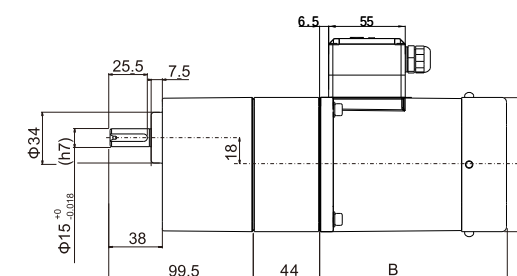



序号 No.	电机类型 Motor type	B
1	YS/YR	140
2	YT	151
3	YB	175
4	YF	187

外形尺寸 (CAD) DIMENSIONS

90/120YS/YR/YT/YB/YF04

组合:电机+带耳减速箱(减速比:1:3~200) 重量:4.2kg

Combination: motor+beared gear (reduction ratio:1:3~200), weight:4.2kg


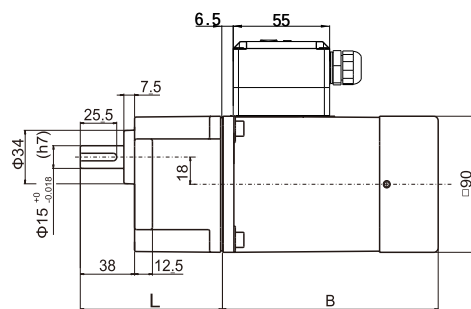


序号 No.	电机类型 Motor type	B	减速比 Reduction ratio	L
1	YS/YR	140	≤10	80
2	YT	151	>10	99.5
3	YB	175		
4	YF	187		

90/120YS/YR/YT/YB/YF05

组合:电机+中间减速箱+带耳减速箱(减速比:1:200~1800) 重量:5.1kg

Combination: motor+intermediate gearbox+beared gear (reduction ratio: 1:200~1800), weight: 5.1kg

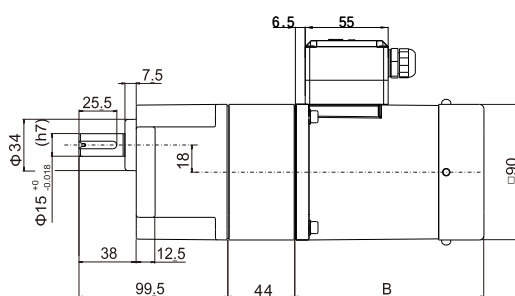


序号 No.	电机类型 Motor type	B
1	YS/YR	140
2	YT	151
3	YB	175
4	YF	187

90/120YS/YR/YT/YB/YF06

组合:电机+直角中实减速箱(减速比:1:3~200)
重量:6.2kg


Combination: motor+right angle solid gearbox(reduction ratio: 1:3~200), weight: 6.2kg

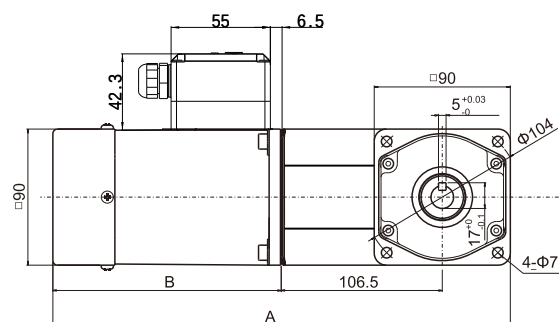



90/120YS/YR/YT/YB/YF07

组合:电机+中间减速箱+直角中实减速箱
(减速比:1:200~1800)重量:7.1kg

Combination: motor+intermediate gearbox+right angle solid gearbox(reduction ratio:1:200~1800), weight:7.1kg

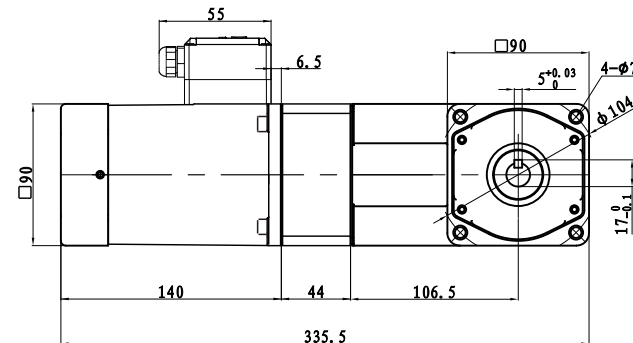



外形尺寸 (CAD) DIMENSIONS

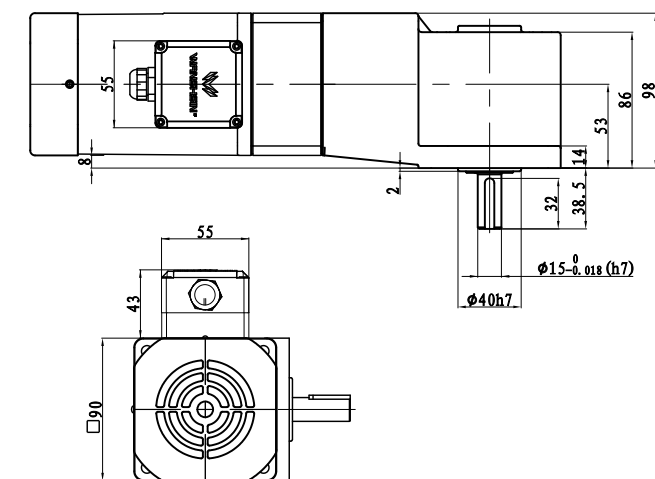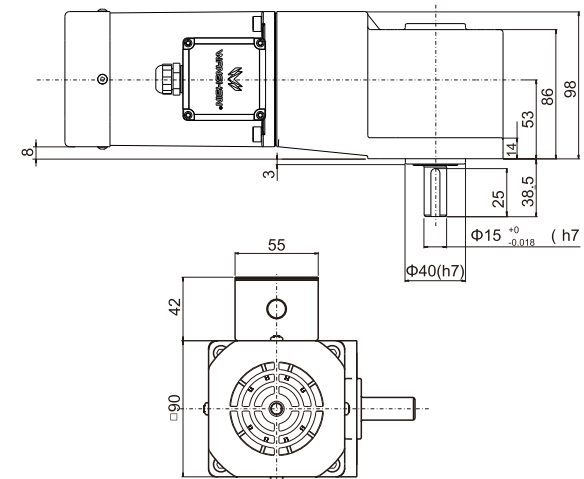

90/120YS/YR/YT/YB/YF08

组合:电机+直角中空减速箱(减速比:1:3~200) 重量:6kg

Combination: motor+right angle hollow gearbox(reduction ratio:1:3~200),
weight:6kg

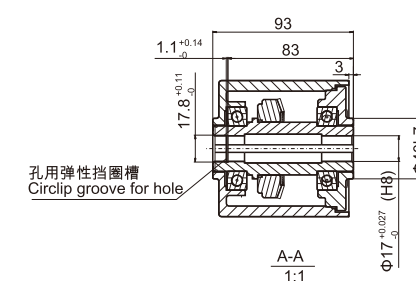
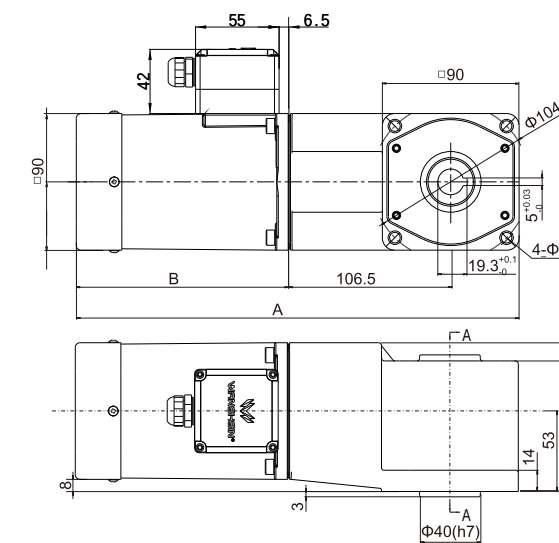


序号 No.	电机类型 Motor type	A	B	C
1	YS/YR	291.5	140	335.
2	YT	302.5	151	346.
3	YB	326.5	175	370.
4	YF	338.5	187	382.

90/120YS/YR/YT/YB/YF09

组合:电机+中间减速箱+直角中空减速箱
(减速比:1:200~1800) 重量:6.9kg

Combination: motor+intermediate gearbox+right angle hollow gearbox
(reduction ratio: 1:200~1800), weight: 6.9kg

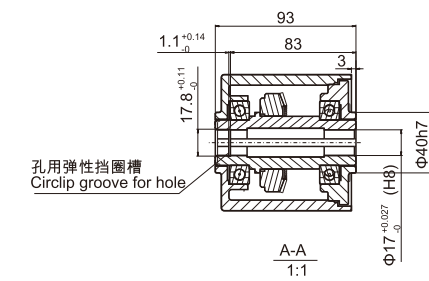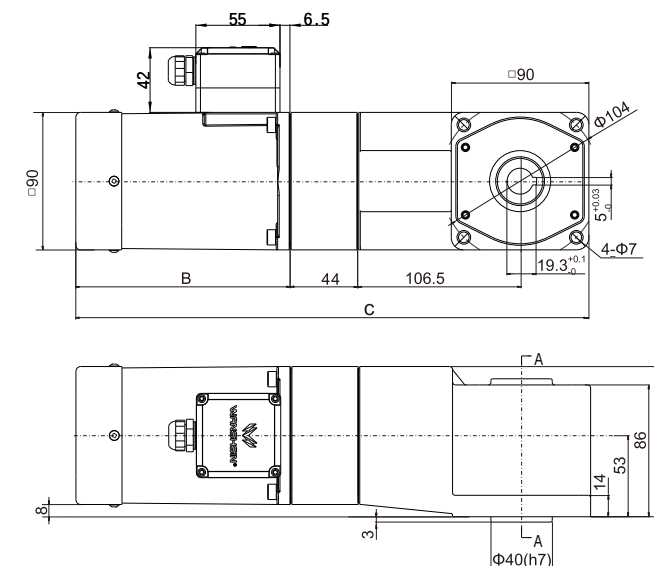

Technical drawing of a shaft with a hole and a circlip groove. The drawing shows a cross-section of a shaft with a hole of diameter 17.8 (+0.11/-0.0) mm. A circlip groove is located on the shaft, with a depth of 3 mm. The shaft has a diameter of 40 mm (H8) and a length of 17.8 (+0.027/-0.0) mm. The drawing is labeled 'A-A'.

140W
160W

□100×100mm

各型号电机性能 MOTOR PERFORMANCE									
型号 MODEL	最大输出功率(W) MAXIMUM OUTPUT POWER	电压V VOLTAGE	频率Hz FREQUENCY	电流A CURRENT	调速范围 r/min SPEED RANGE	起动转矩 N·mm START TORQUE	额定转矩(N·mm) RATED TORQUE		运行电容 RUNNING CAPACITOR
							1200r/min	90r/min	
齿轮轴 GEAR SHAFT	100YS140GV11 100YT140GV11 100YB140GV11 100YF140GV11	140	Single phase 单相 110	50Hz	2.26	90-1300	840	1050	28μf/250V
圆轴 ROUND SHAFT	100YS140DV11 100YT140DV11 100YB140DV11 100YF140DV11			60Hz	2.10	90-1600	680	350	
齿轮轴 GEAR SHAFT	100YS140GV22 100YT140GV22 100YB140GV22 100YF140GV22			50Hz	1.13	90-1300	840	350	
圆轴 ROUND SHAFT	100YS140DV22 100YT140DV22 100YB140DV22 100YF140DV22			60Hz	1.05	90-1600	680	350	
齿轮轴 GEAR SHAFT	100YS140GY22 100YB140GY22	140	Three phase 三相 220	50Hz	0.95	90-1300	1393	1078	8μf/450V
圆轴 ROUND SHAFT	100YS140DY22 100YB140DY22			60Hz	0.88	90-1600	1183	875	
齿轮轴 GEAR SHAFT	100YS140GY38 100YB140GY38	140	Three phase 三相 380	50Hz	0.55	90-1300	1393	1078	
圆轴 ROUND SHAFT	100YS140DY38 100YB140DY38			60Hz	0.48	90-1600	1183	875	
齿轮轴 GEAR SHAFT	100YS160GV11 100YT160GV11 100YB160GV11 100YF160GV11	160	Single phase 单相 110	50Hz	2.60	90-1300	900	1250	28μf/250V
圆轴 ROUND SHAFT	100YS160DV11 100YT160DV11 100YB160DV11 100YF160DV11			60Hz	2.34	90-1600	750	1250	
齿轮轴 GEAR SHAFT	100YS160GV22 100YT160GV22 100YB160GV22 100YF160GV22			50Hz	1.30	90-1300	900	1250	
圆轴 ROUND SHAFT	100YS160DV22 100YT160DV22 100YB160DV22 100YF160DV22			60Hz	1.17	90-1600	750	1250	
齿轮轴 GEAR SHAFT	100YS160GY22 100YB160GY22	160	Three phase 三相 220	50Hz	1.21	90-1300	1590	1248	8μf/450V
圆轴 ROUND SHAFT	100YS160DY22 100YB160DY22			60Hz	1.09	90-1600	1353	1005	
齿轮轴 GEAR SHAFT	100YS160GY38 100YB160GY38	160	Three phase 三相 380	50Hz	0.70	90-1300	1590	1248	
圆轴 ROUND SHAFT	100YS160DY38 100YB160DY38			60Hz	0.50	90-1600	1353	1005	

•虽然调速电机的调速范围为：50Hz...90~1300r/min；60Hz...90~1600r/min。但由于低速时(<400r/min)，电机转矩下降较多，易发生过载，且电机直连风扇冷却效果差，易发热，因此必须预留足够的功率余量，并且不要经常工作在低速区。因此电机最佳调速范围为：50Hz...400~1300r/min；60Hz...400~1600r/min。

•在断开电源的同时，电机瞬间停止关保持负载。

•Although the speed range of the motor is 50Hz, 90~1300r/min, 60Hz, 90~1600r/min, it easily causes overload and the cooling effect of the motor fan is poor if the speed is too low (<400r/min) and the motor torque decreases too much; therefore, please keep sufficient power margin and avoid operating in low speed section frequently. The optimal speed range of the motor is 50Hz, 400~1300r/min, 60Hz, 400~1600r/min.

•When the power is cut off, the motor will stop immediately and hold the load.

减速箱减速比性能对照表 REDUCTION RATIO PERFORMANCE CHART														
减速比REDUCTION RATIO			3	3.6	5	6	7.5	10	12.5	15	18	20	25	30
140W	50Hz	最高转速r/min Output bearing speed	433	361	260	217	173	130	104	87	72	65	52	43
		额定转矩N·m Rated torque	2.62	3.15	4.37	5.25	6.56	7.51	9.38	11.26	13.51	15.02	18.77	21.91
	60Hz	最高转速r/min Output bearing speed	533	444	320	267	213	160	128	107	89	80	64	53
		额定转矩N·m Rated torque	2.19	2.62	3.64	4.37	5.46	6.26	7.82	9.38	11.26	12.51	15.64	18.26
160W	50Hz	最高转速r/min Output bearing speed	433	361	260	217	173	130	104	87	72	65	52	43
		额定转矩N·m Rated torque	2.76	3.31	4.60	5.52	6.90	9.20	11.5	13.8	16.56	18.4	23.0	27.6
	60Hz	最高转速r/min Output bearing speed	533	444	320	267	213	160	128	107	89	80	64	53
		额定转矩N·m Rated torque	2.48	2.98	4.14	4.97	6.21	8.28	10.35	12.42	14.9	16.56	20.7	24.84
减速比REDUCTION RATIO			36	40	50	60	75	90	100	120	150	180	200	
140W	50Hz	最高转速r/min Output bearing speed	36	33	26	22	17	14	13	11	9	7	7	
		额定转矩N·m Rated torque	26.29	29.21	33.94	40.73	44	44	44	44	44	44	44	
	60Hz	最高转速r/min Output bearing speed	44	40	32	27	21	18	16	13	11	9	8	
		额定转矩N·m Rated torque	21.91	24.34	28.28	33.94	40.73	44	44	44	44	44	44	
160W	50Hz	最高转速r/min Output bearing speed	36	33	26	22	17	14	13	11	9	7	7	
		额定转矩N·m Rated torque	33.12	36.8	44	44	44	44	44	44	44	44	44	
	60Hz	最高转速r/min Output bearing speed	44	40	32	27	21	18	16	13	11	9	8	
		额定转矩N·m Rated torque	29.80	33.12	44	44	44	44	44	44	44	44	44	

*表中转速是以电机的平均转速(50Hz:1300r/min、60Hz:1600r/min)为基数除以减速比而算出的数值。

*实际转速随负载大小而少量变化，变化范围为±8%左右。

*The speed in the table is the value of average motor speed (50Hz: 1300r/min, 60Hz: 1600r/min) divided by the reduction ratio.

*The actual speed changes according to the load (±8%).



标准减速箱
STANDARD GEARBOX
100GF □H



直角中空减速箱
RIGHT ANGLE HOLLOW GEARBOX
L100GF □RC



直角中实减速箱
RIGHT ANGLE SOLID GEARBOX
L100GF □RT

减速箱型号中的□为减速比的数值
速比: 1:3~200
□ in gearbox model indicates the reduction ratio (1:3~200)

180W
200W

□100×100mm

各型号电机性能 MOTOR PERFORMANCE

型号 MODEL		最大输出 功率(W) MAXIMUM OUTPUT POWER	电压V VOLTAGE	频率Hz FREQUENCY	电流A CURRENT	调速范围 r/min SPEED RANGE	起动转矩 N·mm START TORQUE	额定转矩(N·mm) RATED TORQUE		运行电容 RUNNING CAPACITOR	
								1200r/min	90r/min		
齿轮轴 GEAR SHAFT	100YS180GV11	180	Single phase 单相 110	50Hz	3.00	90-1300	1050	1450		32μf/250V	
	100YT180GV11										
	100YB180GV11										
	100YF180GV11										
圆轴 ROUND SHAFT	100YS180DV11			60Hz	2.70	90-1600	880	1450			
	100YT180DV11										
	100YB180DV11										
	100YF180DV11										
齿轮轴 GEAR SHAFT	100YS180GV22	180	Single phase 单相 220	50Hz	1.50	90-1300	1050	1450		10μf/450V	
	100YT180GV22										
	100YB180GV22										
	100YF180GV22										
圆轴 ROUND SHAFT	100YS180DV22			60Hz	1.35	90-1600	880	1450			
	100YT180DV22										
	100YB180DV22										
	100YF180DV22										
齿轮轴 GEAR SHAFT	100YS180GY22	180	Three phase 三相 220	50Hz	1.30	90-1300	1790	1418			
	100YB180GY22										
	100YS180DY22										
	100YB180DY22										
圆轴 ROUND SHAFT	100YS180GY38	180	Three phase 三相 380	50Hz	0.75	90-1300	1790	1418			
	100YB180GY38										
	100YS180DY38										
	100YB180DY38										
齿轮轴 GEAR SHAFT	100YS200GV11	200	Single phase 单相 110	50Hz	3.38	90-1300	1150	1650		32μf/250V	
	100YT200GV11										
	100YB200GV11										
	100YF200GV11										
圆轴 ROUND SHAFT	100YS200DV11			60Hz	3.08	90-1600	930	1330			
	100YT200DV11										
	100YB200DV11										
	100YF200DV11										
齿轮轴 GEAR SHAFT	100YS200GV22	200	Single phase 单相 220	50Hz	1.69	90-1300	1150	1650		10μf/450V	
	100YT200GV22										
	100YB200GV22										
	100YF200GV22										
圆轴 ROUND SHAFT	100YS200DV22			60Hz	1.54	90-1600	930	1330			
	100YT200DV22										
	100YB200DV22										
	100YF200DV22										
齿轮轴 GEAR SHAFT	100YS200GY22	200	Three phase 三相 220	50Hz	1.82	90-1300	1990	1540			
	100YB200GY22										
	100YS200DY22										
	100YB200DY22										
圆轴 ROUND SHAFT	100YS200GY38	200	Three phase 三相 380	50Hz	1.05	90-1300	1990	1540			
	100YB200GY38										
	100YS200DY38										
	100YB200DY38										

▪虽然调速电机的调速范围为：50Hz...90~1300r/min；60Hz...90~1600r/min。但由于低速时(<400r/min)，电机转矩下降较多，易发生过载，且电机直连风扇冷却效果差，易发热，因此必须预留足够的功率余量，并且不要经常工作在低速区。因此电机最佳调速范围为：50Hz...400~1300r/min；60Hz...400~1600r/min。

▪在断开电源的同时，电机瞬间停止关保持负载。

▪Although the speed range of the motor is 50Hz, 90~1300r/min, 60Hz, 90~1600r/min, it easily causes overload and the cooling effect of the motor fan is poor if the speed is too low (<400r/min) and the motor torque decreases too much; therefore, please keep sufficient power margin and avoid operating in low speed section frequently. The optimal speed range of the motor is 50Hz, 400~1300r/min, 60Hz, 400~1600r/min.

▪When the power is cut off, the motor will stop immediately and hold the load.

减速箱减速比性能对照表 REDUCTION RATIO PERFORMANCE CHART

减速比REDUCTION RATIO		3	3.6	5	6	7.5	10	12.5	15	18	20	25	30
180W 50Hz	最高转速r/min Output bearing speed	433	361	260	217	173	130	104	87	72	65	52	43
	额定转矩N·m Rated torque	3.10	3.72	5.16	6.19	7.74	10.32	12.9	15.48	18.58	20.64	25.8	30.96
	最高转速r/min Output bearing speed	533	444	320	267	213	160	128	107	89	80	64	53
	额定转矩N·m Rated torque	2.76	3.31	4.60	5.52	6.90	9.20	11.50	13.80	16.56	18.40	23.0	27.6
200W 50Hz	最高转速r/min Output bearing speed	433	361	260	217	173	130	104	87	72	65	52	43
	额定转矩N·m Rated torque	3.44	4.13	5.73	6.88	8.60	11.46	14.33	17.19	18.51	20.57	25.71	30.85
	最高转速r/min Output bearing speed	533	444	320	267	213	160	128	107	89	80	64	53
	额定转矩N·m Rated torque	2.87	3.44	4.78	5.73	7.16	9.55	11.94	14.33	15.43	17.14	21.43	25.71

减速比REDUCTION RATIO		36	40	50	60	75	90	100	120	150	180	200
180W 50Hz	最高转速r/min Output bearing speed	36	33	26	22	17	14	13	11	9	7	7
	额定转矩N·m Rated torque	37.15	41.28	44	44	44	44	44	44	44	44	44
	最高转速r/min Output bearing speed	44	40	32	27	21	18	16	13	11	9	8
	额定转矩N·m Rated torque	33.48	37.2	44	44	44	44	44	44	44	44	44
200W 50Hz	最高转速r/min Output bearing speed	36	33	26	22	17	14	13	11	9	7	7
	额定转矩N·m Rated torque	37.02	41.14	44	44	44	44	44	44	44	44	44
	最高转速r/min Output bearing speed	44	40	32	27	21	18	16	13	11	9	8
	额定转矩N·m Rated torque	30.85	34.28	42.85	44	44	44	44	44	44	44	44

▪表中转速是以电机的平均转速(50Hz:1300r/min、60Hz:1600r/min)为基数除以减速比而算出的数值。

▪实际转速随负载大小而少量变化，变化范围为±8%左右。

▪The speed in the table is the value of average motor speed (50Hz: 1300r/min, 60Hz: 1600r/min) divided by the reduction ratio.

▪The actual speed changes according to the load (±8%).



标准减速箱
STANDARD GEARBOX
100GF □H



直角中空减速箱
RIGHT ANGLE HOLLOW GEARBOX
L100GF □RC



直角中实减速箱
RIGHT ANGLE SOLID GEARBOX
L100GF □RT

减速箱型号中的□为减速比的数值
速比: 1:3~200
□ in gearbox model indicates the reduction ratio (1:3~200)

250W

□100×100mm

各型号电机性能 MOTOR PERFORMANCE

型号 MODEL				最大输出 功率(W) MAXIMUM OUTPUT POWER	电压V VOLTAGE	频率Hz FREQUENCY	电流A CURRENT	调速范围 r/min SPEED RANGE	起动转矩 mN·m START TORQUE	额定转矩(mN·m) RATED TORQUE		运行电容 RUNNING CAPACITOR
齿轮轴 GEAR SHAFT	100YS250GV11	100YB250GV11	100YF250GV11	250	Single phase 单相 110	50Hz	3.60	90-1300	1250	1850		40uf/250V
圆轴 ROUND SHAFT	100YS250DV11	100YB250DV11	100YF250DV11			60Hz	2.24	90-1600	980	1850		
齿轮轴 GEAR SHAFT	100YS250GV22	100YB250GV22	100YF250GV22	250	Single phase 单相 220	50Hz	1.80	90-1300	1250	1850		12uf/450V
圆轴 ROUND SHAFT	100YS250DV22	100YB250DV22	100YF250DV22			60Hz	1.62	90-1600	980	1850		
齿轮轴 GEAR SHAFT	100YS250GY22	100YB250GY22		250	Three phase 三相 220	50Hz	1.82	90-1300	2110	1670		
圆轴 ROUND SHAFT	100YS250DY22	100YB250DY22				60Hz	1.64	90-1600	1860	1380		
齿轮轴 GEAR SHAFT	100YS250GY38	100YB250GY38		250	Three phase 三相 380	50Hz	1.05	90-1300	2110	1670		
圆轴 ROUND SHAFT	100YS250DY38	100YB250DY38				60Hz	0.95	90-1600	1860	1380		

•虽然调速电机的调速范围为：50Hz...90~1300r/min；60Hz...90~1600r/min。但由于低速时(<400r/min)，电机转矩下降较多，易发生过载，且电机直连风扇冷却效果差，易发热，因此必须预留足够的功率余量，并且不要经常工作在低速区。因此电机最佳调速范围为：50Hz...400~1300r/min；60Hz...400~1600r/min。

•在断开电源的同时，电机会瞬间停止关保持负载。

•Although the speed range of the motor is 50Hz, 90~1300r/min, 60Hz, 90~1600r/min, it easily causes overload and the cooling effect of the motor fan is poor if the speed is too low (<400r/min) and the motor torque decreases too much; therefore, please keep sufficient power margin and avoid operating in low speed section frequently. The optimal speed range of the motor is 50Hz, 400~1300r/min, 60Hz, 400~1600r/min.

•When the power is cut off, the motor will stop immediately and hold the load.

减速箱减速比性能对照表 REDUCTION RATIO PERFORMANCE CHART

减速比 REDUCTION RATIO				3	3.6	5	6	7.5	10	12.5	15	18	20	25	30
250W	50Hz	最高转速r/min	Max output speed	433	361	260	217	173	130	104	87	72	65	52	43
		额定转矩N·m	Rated torque	4.26	5.11	7.1	8.52	10.65	14.2	17.75	21.3	25.56	28.4	35.5	42.6
	60Hz	最高转速r/min	Max output speed	533	444	320	267	213	160	128	107	89	80	64	53
		额定转矩N·m	Rated torque	3.83	4.6	639	7.67	9.59	12.78	15.98	19.17	23	25.56	31.95	38.34
减速比 REDUCTION RATIO				36	40	50	60	75	90	100	120	150	180	200	
140W	50Hz	最高转速r/min	Max output speed	36	33	26	22	17	14	13	11	9	7	7	
		额定转矩N·m	Rated torque	44	44	44	44	44	44	44	44	44	44	44	
	60Hz	最高转速r/min	Max output speed	44	40	32	27	21	18	16	13	11	9	8	
		额定转矩N·m	Rated torque	44	44	44	44	44	44	44	44	44	44	44	

•表中转速是以电机的平均转速(50Hz:1300r/min、60Hz:1600r/min)为基数除以减速比而算出的数值。

•实际转速随负载大小而少量变化，变化范围为±8%左右。

•The speed in the table is the value of average motor speed (50Hz: 1300r/min, 60Hz: 1600r/min) divided by the reduction ratio.

•The actual speed changes according to the load (±8%).



标准减速箱
STANDARD GEARBOX
100GF □H



直角中空减速箱
RIGHT ANGLE HOLLOW GEARBOX
L100GF □RC



直角中实减速箱
RIGHT ANGLE SOLID GEARBOX
L100GF □RT

减速箱型号中的□为减速比的数值

速比: 1:3~200


□ in gearbox model indicates the reduction ratio (1:3~200)

外形尺寸 (CAD) DIMENSIONS

140/160/180/200/250YS/YT/YB/YF01

圆轴电箱 重量:4.6kg


Round-axis motor,weight:4.6kg

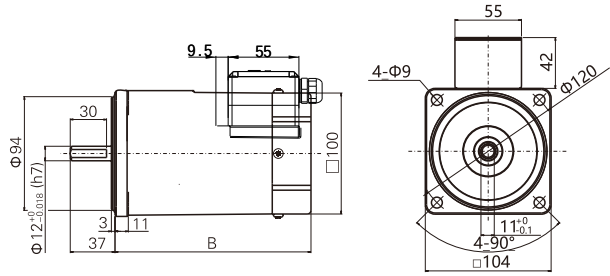

140/160/180/200/250YS/YT/YB/YF02

组合:电机+标准减速机(减速比:1:3~200) 重量:6.8kg

Combination: motor+standard gearbox(reduction ratio:1:3~200), weight:6.8kg

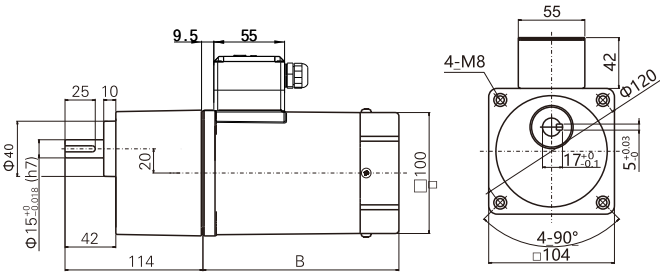


140/160/180/200/250YS/YT/YB/YF03

组合:电机+直角中实减速箱

减速比:1:3~200

重量:8.8kg

Combination: motor+right angle solid gearbox
reduction ratio:1:3~200
weight:8.8kg

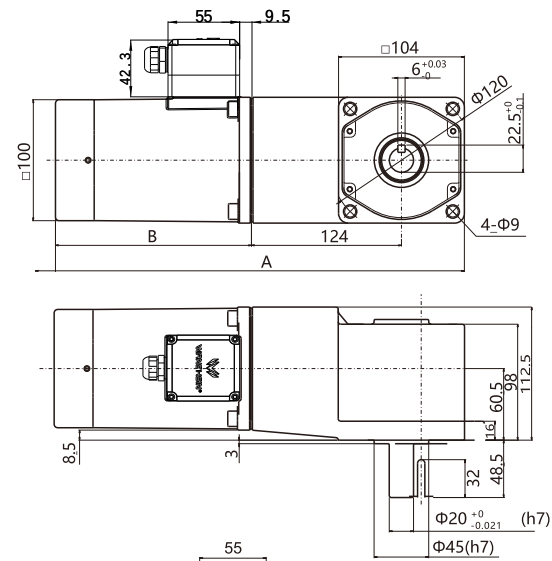



140/160/180/200/250YS/YT/YB/YF04

组合:电机+直角中空减速箱


减速比:1:3~200

重量:8.6kg

Combination: motor+right angle hollow gearbox
reduction ratio:1:3~200
weight:8.6kg

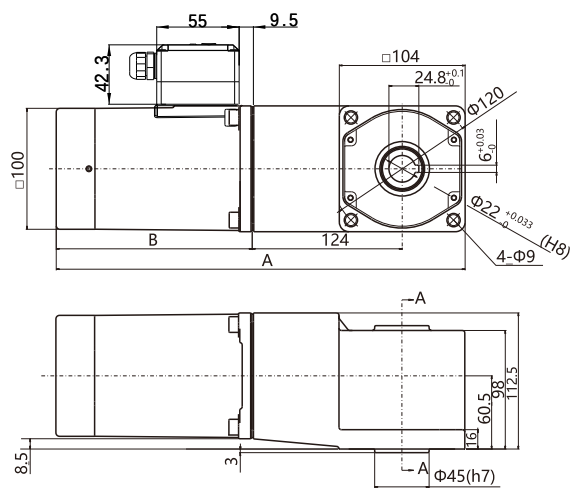

序号 No.	电机类型 Motor type	A	B
1	YS	338	162
2	YT	354	178
3	YB	368	192
4	YF	390	214

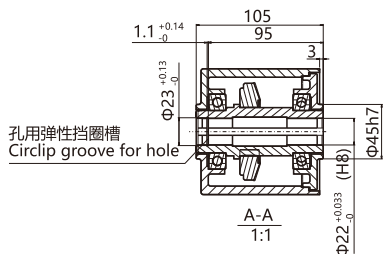

数显面板调速器


Digital Panel Speed Controller



特点 FEATURES

- 与调速电机组实现宽范围的无级变速。
Achieve continuously variable transmission in a wide range combined with variable speed motor
- 功能丰富，可实现缓慢加速，缓慢减速及电机堵转保护。
Feature-rich, enabling slow acceleration, slow deceleration and motor stall protection.
- 调速器运行电容直接安装于调速器内部，布线整齐、方便。
The capacitor for speed governor running is mounted directly inside the governor, featuring neat and convenient wiring.

数显面板调速器 Digital panel speed controller

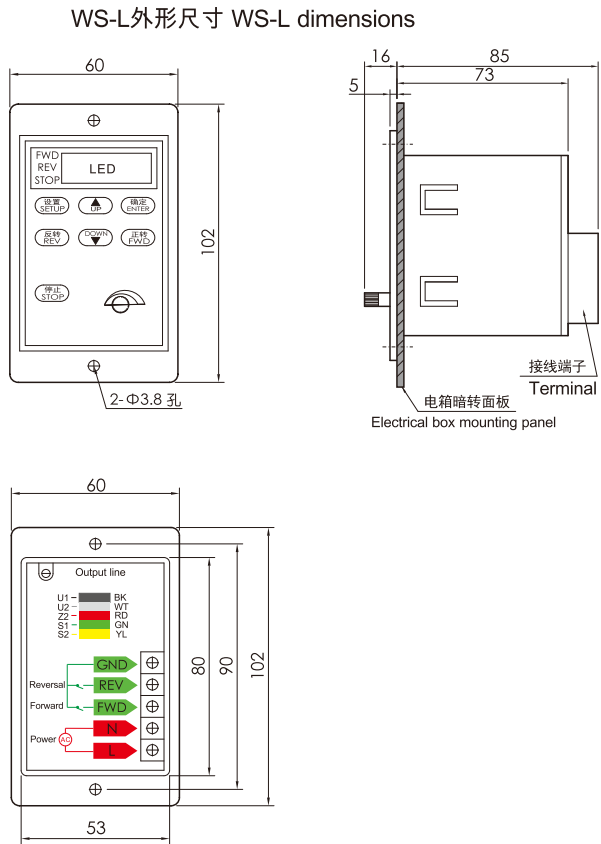

型号参数表 MODEL PARAMETERS

型号 MODEL	WS-L	
安装方式 INSTALLATION METHOD	数显面板式	Digital panel
调速方法 SPEED REGULATION	面板按钮及电位器	Panel Key and potentiometer
电源电压 SUPPLY VOLTAGE	单相220Vac	Single phase 220Vac
控制功能 FUNCTIONS	速度控制、缓慢减速、缓慢加速、电磁制动、堵转保护、面板控制正反转、转速显示、面板按键、控制有记忆、倍率设定与外接开关K1及K2可直接接PLC控制。 Speed control, slow acceleration, slow deceleration, electronic brake, stall protection, panel control forward and reverse rotation, speed display, Digital display key controlled, it will be remembered, ratio setting and choose external switchK1 AND K2 Can connect with PLC to control directly.	
适用电机功率范围 APPLICABLE MOTOR POWER RANGE	6W~200W	
运行电容 RUNNING CAPACITOR	内置Built-in	
电源频率 POWER FREQUENCY	50/60Hz	
调速范围 SPEED RANGE	50Hz:90~1300r/min 60Hz:90~1600r/min	
速度变化率 RATE OF SPEED CHANGE	5%	
电磁制动 ELECTRONIC BRAKING TIME	0.4秒sec	
使用环境 ENVIRONMENT OF USE	-10℃~+40℃无冻结No freezing,<85%(无结露No condensation)	

面板调速器


Panel Speed Controller



特点 FEATURES

- 与调速电机组实现宽范围的无级变速。
Achieve continuously variable transmission in a wide range combined with variable speed motor
- 功能丰富，可实现缓慢加速，缓慢减速及电机堵转保护。
Feature-rich, enabling slow acceleration, slow deceleration and motor stall protection.
- 调速器运行电容直接安装于调速器内部，布线整齐、方便。
The capacitor for speed governor running is mounted directly inside the governor, featuring neat and convenient wiring.

面板式调速器 Panel speed controller

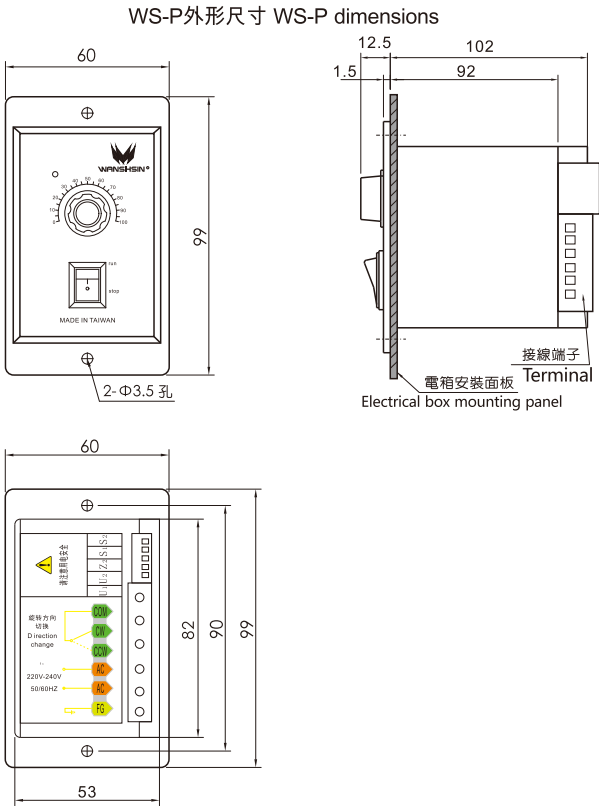

型号参数表 MODEL PARAMETERS

型号 MODEL	WS-P	
安装方式 INSTALLATION METHOD	面板式	Panel
调速方法 SPEED REGULATION	面板电位器	Panel potentiometer
电源电压 SUPPLY VOLTAGE	单相220V	Single phase 220V
控制功能 FUNCTIONS	速度控制、缓慢加速、 缓慢减速、堵转保护 Speed control, slow acceleration, slow deceleration, stall protection	
适用电机功率范围 APPLICABLE MOTOR POWER RANGE	6W~200W	
运行电容 RUNNING CAPACITOR	内置Built-in	
电源频率 POWER FREQUENCY	50/60Hz	
调速范围 SPEED RANGE	50Hz:90~1300r/min 60Hz:90~1600r/min	
速度变化率 RATE OF SPEED CHANGE	5%	
使用环境 ENVIRONMENT OF USE	-10℃~+40℃无冻结No freezing,<85%(无结露No condensation)	

多功能调速器

Multi-Function Speed Controller




特点 FEATURES

- 与调速电机组合实现宽范围的无级变速。
Achieve continuously variable transmission in a wide range combined with variable speed motor
- 功能丰富，可实现缓慢加速，缓慢减速及电机堵转保护。
Feature-rich, enabling slow acceleration, slow deceleration and motor stall protection.
- 调速器运行电容直接安装于调速器内部，布线整齐、方便。
The capacitor for speed governor running is mounted directly inside the governor, featuring neat and convenient wiring.


型号参数表 MODEL PARAMETERS

型号 MODEL	WX-K
安装方式 INSTALLATION METHOD	多功能内置式 Multi-Function(Built-in)
调速方法 SPEED REGULATION	面板按钮及电位器 Panel Key and potentiometer
电源电压 SUPPLY VOLTAGE	单相220Vac Single phase 220Vac
控制功能 FUNCTIONS	速度控制、缓慢加速、缓慢减速、堵转保护、控制正反转、转速显示、面板按键控制有记忆、倍率设定、4段速、失电电磁制动停止、RST复位功能。0~10V模拟量控制与外接开关K1及K2可直接接PLC控制。 Speed control, slow acceleration, slow deceleration, electronic brake, stall protection, panel control Forward and reverse rotation, speed display, Digital display key controlled, it will be remembered, ratio Setting, 4 stage speed, the electromagnetic brake stop, RST function. 0~10V analog controlled and choose external Switch K1 AND K2 Can connect with PLC to control directly.
适用电机功率范围 APPLICABLE MOTOR POWER RANGE	6W~200W
运行电容 RUNNING CAPACITOR	内置Built-in
电源频率 POWER FREQUENCY	50/60Hz
调速范围 SPEED RANGE	50Hz:90~1300r/min 60Hz:90~1600r/min
速度变化率 RATE OF SPEED CHANGE	5%
电磁制动 ELECTRONIC BRAKING TIME	0.4秒sec
使用环境 ENVIRONMENT OF USE	-10℃~+40℃无冻结No freezing, <85%(无结露No condensation)

多功能调速器 Multi-function speed controller

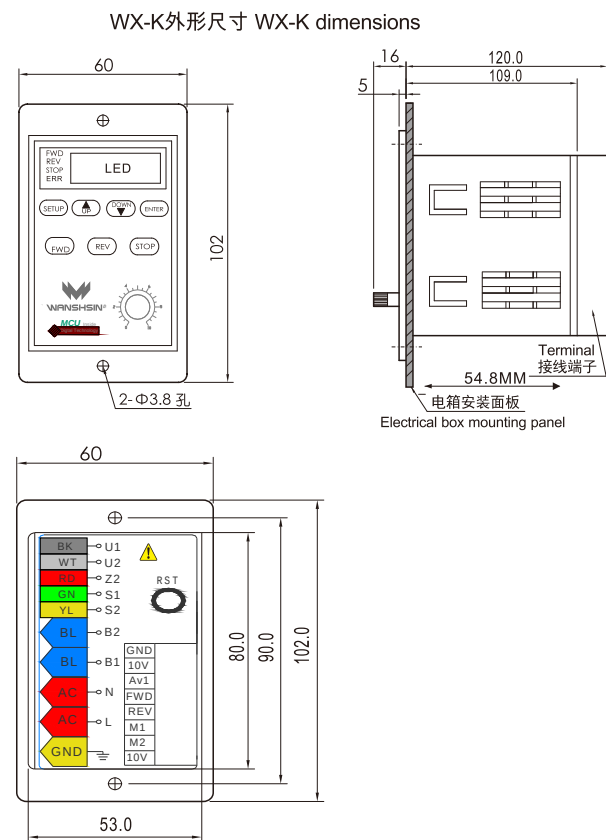


■ 面板式调速器的安装 INSTALLATION OF PANEL SPEED GOVERNOR

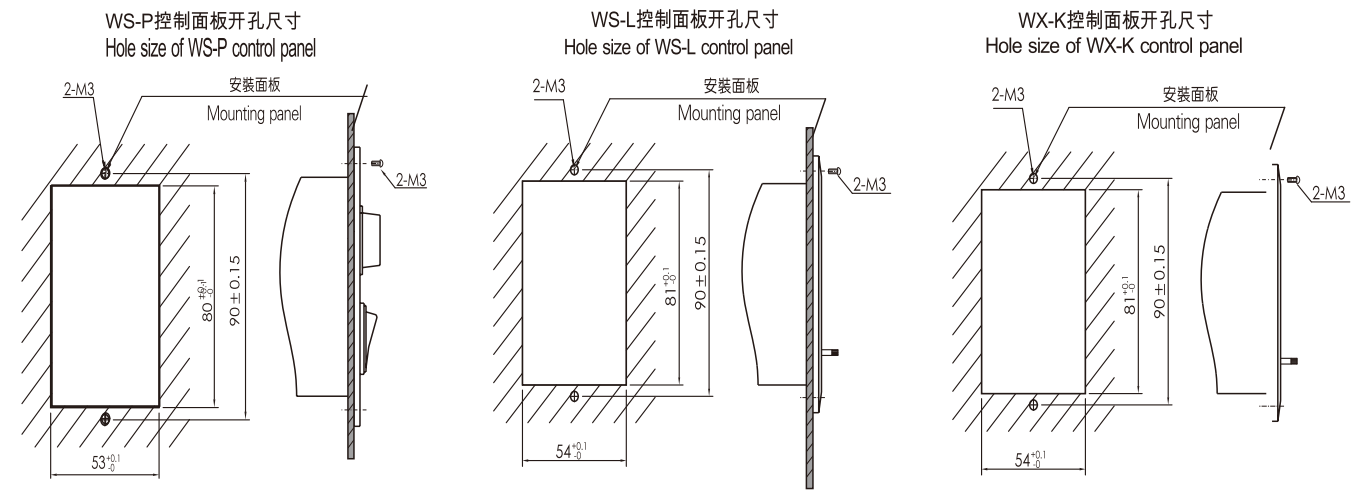


将调速器按图示方向放入开孔，紧固螺钉。
Put the governor into the hole in the direction shown, and tighten the screws.

■ 接线方法 WIRING METHOD


单向旋转Unidirectional rotation

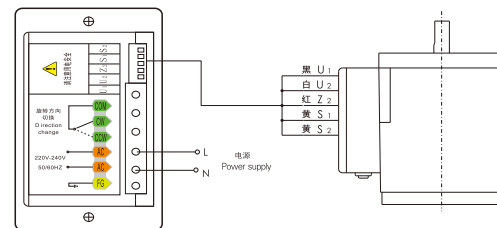

正、反向旋转 Forward and reverse rotation

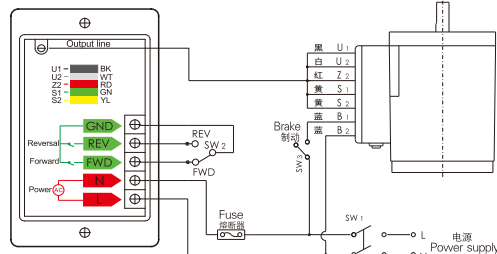

控制接线图Drawing the speed controller

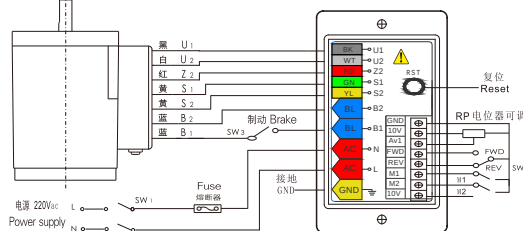

■ 旋转方向 DIRECTION OF ROTATION

调速器出厂时，旋转方向选择软线连接于L与FWD端，电机顺时针旋转，若需使电机逆时针旋转，仅需将软线连接于REV端。若需正、反向旋转，则在FWD、REV连接旋转方向选择开关SW2。

When the governor is delivered, the cord of rotation direction selection has been connected to the L and FWD terminal, and the motor rotates clockwise; to make the motor rotate counterclockwise, just connect the cord to the REV terminal. For forward and reverse rotation, connect FWD and REV terminals to the rotation direction selector switch Sw2.

注：型号WS-L可选择面板按键控制正反转，或是手动接后面板
Note: Model WS-L allows controlling forward and reverse rotation with the panel button, or manually connect rear panel wiring.

■ 电机制动停止 MOTOR BRAKE STOPS

当电机停止运转时，断开SW3，电机内失电电磁制动器刹车，电机电磁制动，保持负载。在电机正常运转中，不允许断开SW3,否则电机及电机内的失电电磁制动器将烧坏。
When the motor stops running, disconnect SW3, the de-energized electromagnetic brake in the motor brakes, and the motor brakes and maintains the load. In the normal operation of the motor, it is not allowed to disconnect SW3, or else the motor and the de-energized electromagnetic brake in the motor will burn.

● 特别注意 Special Note

B1、B2通电，失电电磁制动器不刹车；B1、B2断电，失电电磁制动器刹车。刹车电源开关必须与电机调速开关同步。

When B1 and B2 are energized, the de-energized electromagnetic brake won't brake; when B1 and B2 are de-energized, the de-energized electromagnetic brake brakes. Brake power switch must be synchronized with the motor speed control switch.

■ 运转操作 Running Operation

将调速器与电机按图连接，然后打开AC电源。闭合SW3，电机内失电电磁制动器通电，电磁制动失效。此时将面板上的开关切换到RUN,电机开始旋转。

Connect the speed governor to the motor as shown in the figure, and then turn on the AC power. Close Sw3, the de-energized electromagnetic brake in the motor is energized, and the electromagnetic brake fails; the switch on the turns to RUN, and the motor starts to rotate.

■ 转速调整 Speed Adjustment

顺时针旋转面板上的调速器旋钮，电机转速增加，电机调整范围：50Hz:90~1300r/min 60Hz:90~1600r/min。
Rotate the speed control knob clockwise on the panel, and the motor speed increases; the range of adjustment: 50Hz: 90 ~1300r/min; 60Hz:90~1600r/min.

● 特别注意 Special Note

严禁使用SW1电源开关作为运行/制动开关/停产调速器，并使用电机停止制动保持负载，否则易造成调速器损坏。现时由于调速器每次开电源时其内部电路有充电时间，故无法立即启动电机，动作亦会不正常。

Do not use SW1 power switch as the start/stop speed governor of running/brake switch and stop braking with the motor and hold the load, or else it will damage the speed governor easily. At present, internal circuit needs time to charge when the speed governor is turned on every time, the motor won't be started immediately, and the action will be abnormal.

■ 停止 STOP

将调速器面板上的开关切换到STOP，电机停止。
Turn the switch on the governor panel to STOP, and the motor stops.

注：此开关并非电源开关，若电机长期停止运转，则请另设电源开关。
NOTE: This switch is not a power switch. If the motor stops running for a long time, please equip a separate power switch.

■ 外部接连 External Connect

注：型号WX-K可选择面板按键控制正反转或选择外接开关时，由FWD及REV外接开关K1及K2控制。电机。K1,K2可直接PLC控制。外接电位器连接于0~10V模拟量AVI输入端。

Note: Model WX-K allows controlling forward and reverse rotation with the panel button, or Choose External switch control, FWD&REV buttons connect with external switch K1&K2 to motor,K1,K2 can connect with PLC to control motor directly. External connect potentiometer with 0-10V Analog AVI input port.

微型直流电机

Micro DC Motor

60DC

10W/15W/20W

各型号电机性能 MOTOR PERFORMANCE

机座号 MODEL	电压V VOLTAGE	功率W POWER	负载参数 LOAD PARAMETERS			电刷寿命h BRUSH LIFE	电机重量kg MOTOR WEIGHT
			转速SPEED r/min	力矩TORQUE kg·cm	电流A≤ CURRENT		
60DC10GV12R16	12	10	1600	0.62	1.24	2000	0.7
60DC10GV24R16	24	10	1600	0.62	0.62	2000	0.7
60DC15GV12R16	12	15	1600	0.93	1.87	2000	0.9
60DC15GV24R16	24	15	1600	0.93	0.93	2000	0.9
60DC20GV12R16	12	20	1600	1.24	2.49	2000	0.9
60DC20GV24R16	24	20	1600	1.24	1.24	2000	0.9

减速箱减速比性能对照表 REDUCTION RATIO PERFORMANCE CHART

转速 r/min SPEED	减速比 REDUCTION RATIO	3	3.6	5	6	7.5	10	12.5	15	18	20	25	30
1600	出力轴转速r/min OUTPUT BEARING SPEED	533	444	320	267	213	160	128	107	89	80	64	53
	额定转矩N·m RATED TORQUE	0.129	0.154	0.215	0.259	0.324	0.43	0.53	0.64	0.769	0.77	0.97	1.16
转速 r/min SPEED	减速比 REDUCTION RATIO	36	40	50	60	75	90	100	120	150	180	200	
1600	出力轴转速r/min OUTPUT BEARING SPEED	44	40	32	27	21	18	16	13	11	9	8	
	额定转矩N·m RATED TORQUE	1.39	1.55	1.93	2.32	3	3	3	3	3	3	3	



标准减速箱
STANDARD GEARBOX
60GK □H

减速箱型号中的□为减速比的数值

速比：1:3~200


□ in gearbox model indicates the reduction ratio (1:3~200)

外形尺寸 (CAD) DIMENSIONS

60DC(10W/15W)

圆轴电机


Round-axis motor

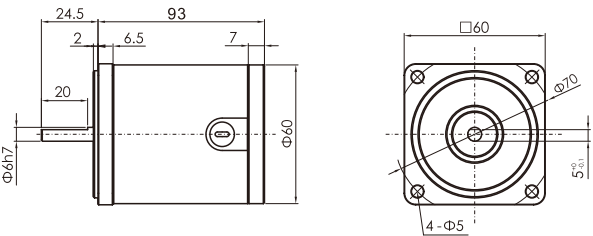

60DC(10W/15W)

组合：电机+标准减速箱 (减速比：1:3~200)

Combination: motor + standard gearbox (reduction ratio: 1:3~200)

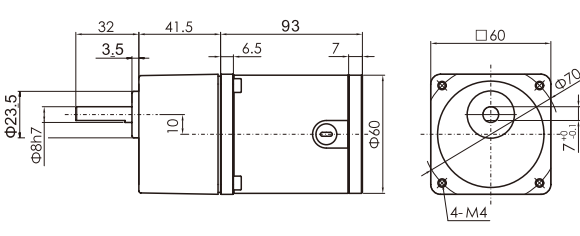

70DC

20W/30W

各型号电机性能 MOTOR PERFORMANCE

机座号 MODEL	电压V VOLTAGE	功率W POWER	负载参数 LOAD PARAMETERS			电刷寿命h BRUSH LIFE	电机重量kg MOTOR WEIGHT
			转速SPEED r/min	力矩TORQUE kg·cm	电流A≤ CURRENT		
70DC20GV12R16	12	20	1600	1.24	2.49	2000	1.0
70DC20GV24R16	24	20	1600	1.24	1.24	2000	1.0
70DC20GV90R16	90	20	1600	1.24	0.33	2000	1.0
70DC30GV12R16	12	30	1600	1.86	3.73	2000	1.1
70DC30GV24R16	24	30	1600	1.86	1.87	2000	1.1
70DC30GV90R16	90	30	1600	1.86	0.50	2000	1.1

减速箱减速比性能对照表 REDUCTION RATIO PERFORMANCE CHART

转速 r/min SPEED	减速比 REDUCTION RATIO	3	3.6	5	6	7.5	10	12.5	15	18	20	25	30
1600	出力轴转速r/min OUTPUT BEARING SPEED	533	444	320	267	213	160	128	107	89	80	64	53
	额定转矩N·m RATED TORQUE	0.26	0.31	0.43	0.52	0.86	0.86	1.08	1.29	1.39	1.55	1.93	2.32
转速 r/min SPEED	减速比 REDUCTION RATIO	36	40	50	60	75	90	100	120	150	180	200	
1600	出力轴转速r/min OUTPUT BEARING SPEED	44	40	32	27	21	18	16	13	11	9	8	
	额定转矩N·m RATED TORQUE	2.78	3.09	3.86	4.46	5	5	5	5	5	5	5	



标准减速箱
STANDARD GEARBOX
70GK □H

减速箱型号中的□为减速比的数值

速比：1:3~200


□ in gearbox model indicates the reduction ratio (1:3~200)

外形尺寸 (CAD) DIMENSIONS

70DC(20W/36W)

圆轴电机


Round-axis motor

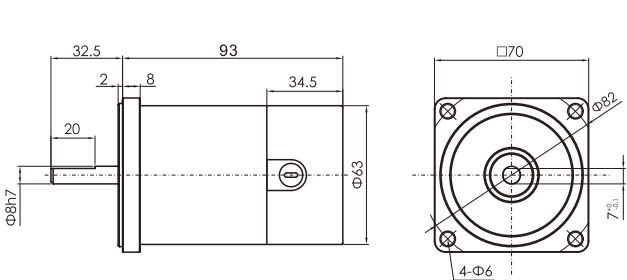

70DC(20W/36W)

组合：电机+标准减速箱 (减速比：1:3~200)

Combination: motor + standard gearbox (reduction ratio: 1:3~200)

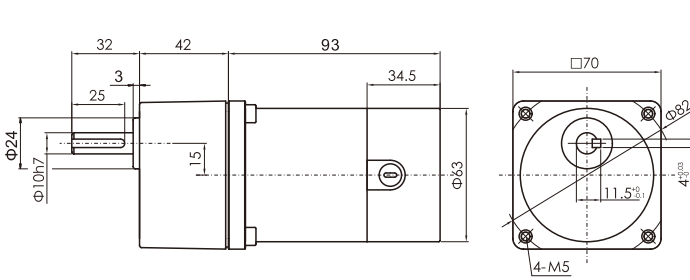

80DC


30W/60W

各型号电机性能 MOTOR PERFORMANCE

机座号 MODEL	电压V VOLTAGE	功率W POWER	负载参数 LOAD PARAMETERS			电刷寿命h BRUSH LIFE	电机重量kg MOTOR WEIGHT
			转速SPEED r/min	力矩TORQUE kg·cm	电流A≤ CURRENT		
80DC30GV12R16	12	30	1600	1.86	3.73	2000	1.8
80DC30GV24R16	24	30	1600	1.86	1.87	2000	1.8
80DC30GV90R16	90	30	1600	1.86	0.50	2000	1.8
80DC60GV12R16	12	60	1600	3.73	7.46	2000	1.9
80DC60GV24R16	24	60	1600	3.73	3.73	2000	1.9
80DC60GV90R16	90	60	1600	3.73	1.00	2000	1.9

减速箱减速比性能对照表 REDUCTION RATIO PERFORMANCE CHART

转速 r/min SPEED	减速比 REDUCTION RATIO	3	3.6	5	6	7.5	10	12.5	15	18	20	25	30
1600	出力轴转速r/min OUTPUT BEARING SPEED	533	444	320	267	213	160	128	107	89	80	64	53
	额定转矩mN·m RATED TORQUE	0.386	0.464	0.644	0.773	0.966	1.288	1.61	1.932	2.318	2.576	3.22	3.477
转速 r/min SPEED	减速比 REDUCTION RATIO	36	40	50	60	75	90	100	120	150	180	200	
1600	出力轴转速r/min OUTPUT BEARING SPEED	44	40	32	27	21	18	16	13	11	9	8	
	额定转矩mN·m RATED TORQUE	4.173	4.63	5.796	6.995	8	8	8	8	8	8	8	



标准减速箱
STANDARD GEARBOX
80GK □H



直角中空减速箱
RIGHT ANGLE HOLLOW GEARBOX
L80GK □RC



直角中实减速箱
RIGHT ANGLE SOLID GEARBOX
L80GK □RT




中间减速箱
INTERMEDIATE GEARBOX
80GM10

减速箱型号中的□为减速比的数值
速比: 1:3~200;中间减速箱: (1 : 10)
□ in gearbox model indicates the reduction ratio (1:3~200);MIDDLE GEARBOX:(1 : 10)

外形尺寸(CAD) DIMENSIONS


80DC(30W/60W)

圆轴电机
Round-axis motor

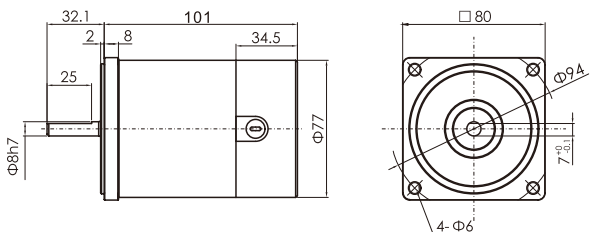


80DC(30W/60W)

组合: 电机+标准减速箱 (减速比: 1:3~200)
Combination: motor + standard gearbox (reduction ratio: 1:3~200)

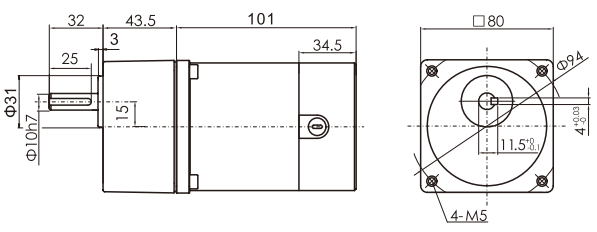


80DC(30W/60W)

组合:电机+中间减速箱+标准减速箱(减速比:1:200~1800)
Combination: motor+intermediate gearbox+standard gearbox(reduction ratio:1:200~1800)

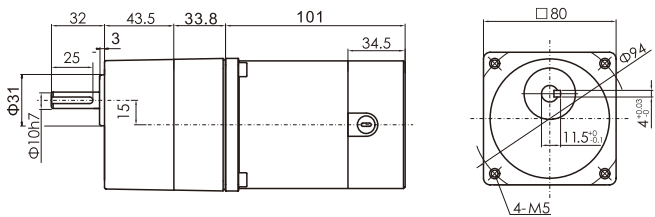


80DC(30W/60W)

组合: 电机+直角中实减速箱
减速比: 1:3~200
Combination: motor + right angle solid gearbox
Reduction ratio: 1:3~200

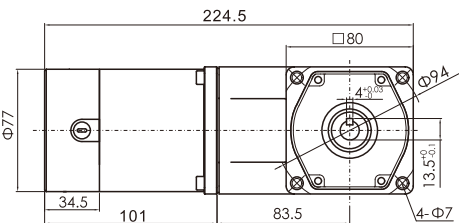


80DC(30W/60W)

组合:电机+中间减速箱+直角中实减速箱
减速比:1:200~1800
Combination: motor+intermediate gearbox+right angle solid gearbox
Reduction ratio:1:200~1800

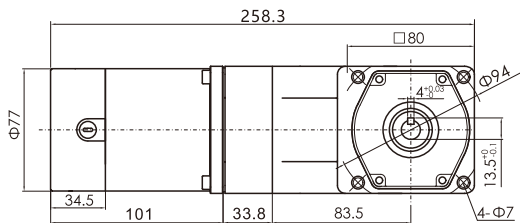

外形尺寸(CAD) DIMENSIONS


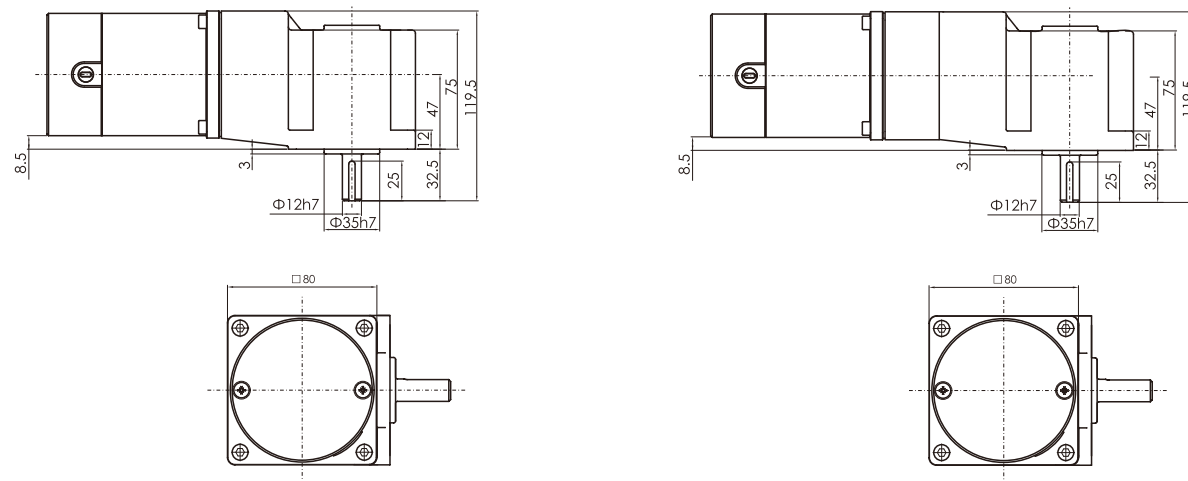


80DC(30W/60W)

组合：电机+直角中空减速箱

減速比：1:3~200

Combination: motor + right angle hollow gearbox
Reduction ratio: 1:3~200

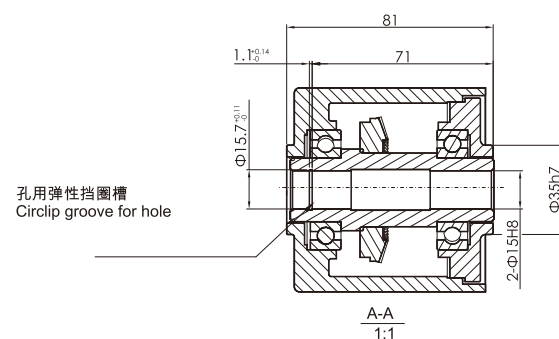
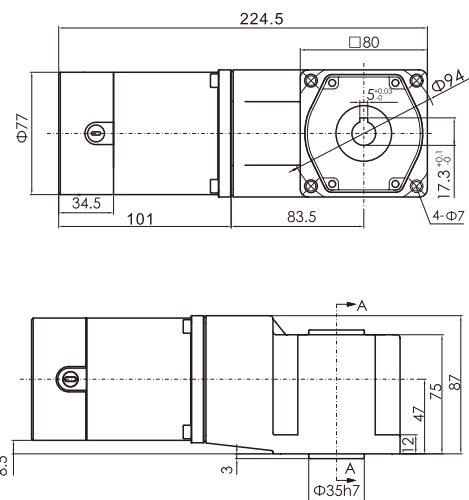


80DC(30W/60W)

组合:电机+中间减速箱+直角中空减速箱

(減速比:1:200~1800)

Combination: motor+intermediate gearbox+right angle hollow gearbox
(reduction ratio: 1:200~1800)

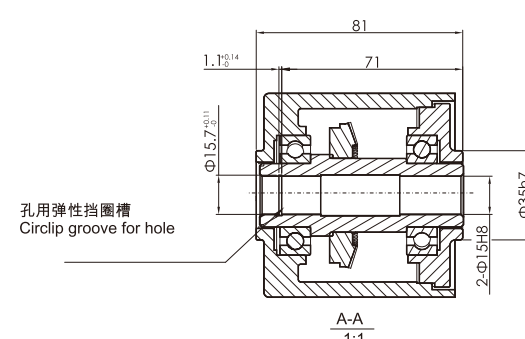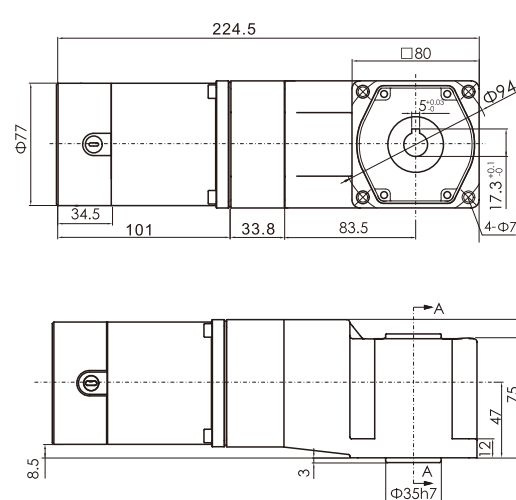

90DC

40W/70W
65W/120W
100W/200W

各型号电机性能 MOTOR PERFORMANCE

机座号 MODEL	电压V VOLTAGE	功率W POWER	负载参数 LOAD PARAMETERS			电刷寿命h BRUSH LIFE	电机重量kg MOTOR WEIGHT
			转速SPEED r/min	力矩TORQUE kg·cm	电流A CURRENT		
90DC40GV12R16	12	40	1600	2.48	4.98	2000	1.9
90DC40GV24R16	24	40	1600	2.48	2.49	2000	1.9
90DC40GV90R16	90	40	1600	2.48	0.66	2000	1.9
90DC70GV12R16	12	70	1600	4.35	8.71	2000	2.0
90DC70GV24R16	24	70	1600	4.35	4.35	2000	2.0
90DC70GV90R16	90	70	1600	4.35	1.16	2000	2.0
90DC65GV12R16	12	65	1600	4.04	8.08	2000	2.0
90DC65GV24R16	24	65	1600	4.04	4.04	2000	2.0
90DC65GV90R16	90	65	1600	4.04	1.08	2000	2.0
90DC65GV180R16	180	65	1600	4.04	0.54	2000	2.0
90DC120GV12R16	12	120	1600	7.45	14.93	2000	2.2
90DC120GV24R16	24	120	1600	7.45	7.46	2000	2.2
90DC120GV90R16	90	120	1600	7.45	1.99	2000	2.2
90DC120GV180R16	180	120	1600	7.45	1.00	2000	2.2
90DC100GV12R16	12	100	1600	6.21	12.44	2000	2.1
90DC100GV24R16	24	100	1600	6.21	6.22	2000	2.1
90DC100GV90R16	90	100	1600	6.21	1.66	2000	2.1
90DC100GV180R16	180	100	1600	6.21	0.83	2000	2.1
90DC200GV12R16	12	200	1600	12.42	24.88	2000	2.3
90DC200GV24R16	24	200	1600	12.42	12.44	2000	2.3
90DC200GV90R16	90	200	1600	12.42	3.32	2000	2.3
90DC200GV180R16	180	200	1600	12.42	1.66	2000	2.3

减速机减速比性能对照表 REDUCTION RATIO PERFORMANCE CHART

■ 40W/70W

转速 r/min SPEED	减速比 REDUCTION RATIO	3	3.6	5	6	7.5	10	12.5	15	18	20	25	30
1600	出力轴转速r/min OUTPUT BEARING SPEED	533	444	320	267	213	160	128	107	89	80	64	53
	额定转矩N·m RATED TORQUE	0.52	0.62	0.86	0.86	1.29	1.72	1.93	2.32	2.78	3.09	3.87	4.64
	减速比 REDUCTION RATIO	36	40	50	60	75	90	100	120	150	180	200	
1600	出力轴转速r/min OUTPUT BEARING SPEED	44	40	32	27	21	18	16	13	11	9	8	
	额定转矩N·m RATED TORQUE	5.57	6.19	6.96	8.35	10.44	12.53	13.92	16.7	20	20	20	
	减速比 REDUCTION RATIO												

■ 65W/120W

转速 r/min SPEED	减速比 REDUCTION RATIO	3	3.6	5	6	7.5	10	12.5	15	18	20	25	30
1600	出力轴转速r/min OUTPUT BEARING SPEED	533	444	320	267	213	160	128	107	89	80	64	53
	额定转矩N·m RATED TORQUE	0.838	1.0	1.397	1.677	2.096	2.975	3.144	3.773	4.527	5.03	6.288	7.545
	减速比 REDUCTION RATIO	36	40	50	60	75	90	100	120	150	180	200	
1600	出力轴转速r/min OUTPUT BEARING SPEED	44	40	32	27	21	18	16	13	11	9	8	
	额定转矩N·m RATED TORQUE	9.054	10.06	11.32	13.58	16.977	20	20	20	20	20	20	
	减速比 REDUCTION RATIO												

■ 100W/200W

转速 r/min SPEED	减速比 REDUCTION RATIO	3	3.6	5	6	7.5	10	12.5	15	18	20	25	30
1600	出力轴转速r/min OUTPUT BEARING SPEED	533	444	320	267	213	160	128	107	89	80	64	53
	额定转矩N·m RATED TORQUE	1.29	1.55	2.15	2.58	3.22	4.3	4.83	5.8	6.96	7.74	9.67	11.6
	减速比 REDUCTION RATIO	36	40	50	60	75	90	100	120	150	180	200	
1600	出力轴转速r/min OUTPUT BEARING SPEED	44	40	32	27	21	18	16	13	11	9	8	
	额定转矩N·m RATED TORQUE	13.92	15.47	17.41	20	20	20	20	20	20	20	20	
	减速比 REDUCTION RATIO												



标准减速箱
STANDARD GEARBOX
90GF □H



带耳减速箱
EARED GEARBOX
90GF □HE



直角中空减速箱
RIGHT ANGLE HOLLOW GEARBOX
L90GF □RC



中间减速箱
INTERMEDIATE GEARBOX
90GM10



直角中实减速箱
RIGHT ANGLE SOLID GEARBOX
L90GF □RT

减速机型号中的□为减速比的数值

速比: 1:3~200;中间减速箱: (1 : 10)



□ in gearbox model indicates the reduction ratio (1:3~200);MIDDLE GEARBOX:(1 : 10)

外形尺寸(CAD) DIMENSIONS

90DC(40W/70W)

圆轴电机



Round-axis motor

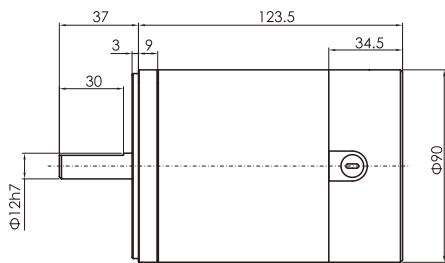

90DC(40W/70W)

组合: 电机+标准减速箱 (减速比: 1:3~200)



Combination: motor + standard gearbox (reduction ratio: 1:3~200)

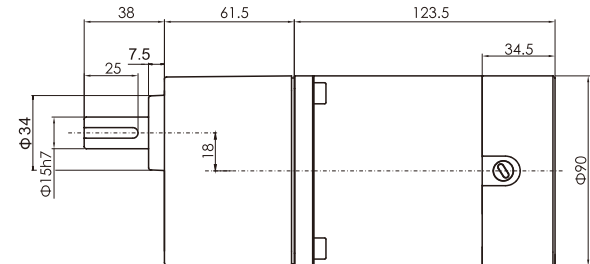

90DC(40W/70W)

组合:电机+中间减速箱+标准减速箱(减速比:1:200~1800)

Combination: motor +intermediate gearbox+standard gearbox(reduction ratio:1:200~1800)


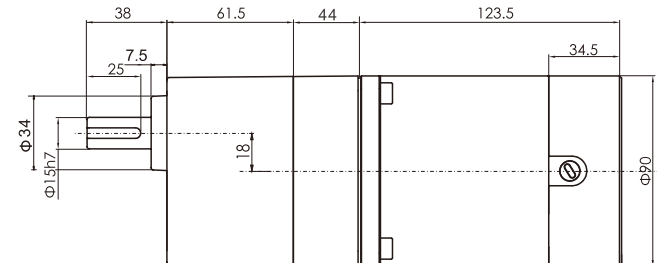


外形尺寸 (CAD) DIMENSIONS

90DC(40W/70W)

组合：电机+带耳减速机（减速比：1:3~200）



Combination: motor + eared gear (reduction ratio: 1:3~200)

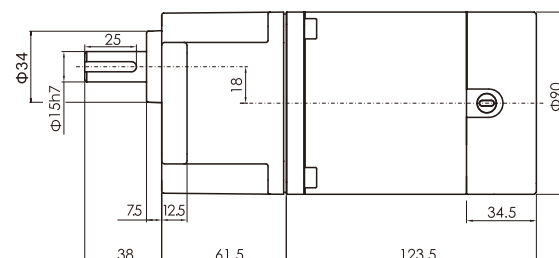

90DC(40W/70W)

组合:电机+中间减速机+带耳减速机(减速比:1:200~1800)

Combination: motor+intermediate gearbox+eared gear(reduction ratio:1:200~1800)

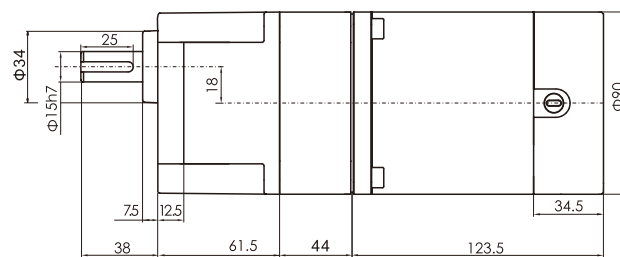



90DC(40W/70W)

组合：电机+直角中实减速机

减速比：1:3~200

Combination: motor + right angle solid gearbox

Reduction ratio: 1:3~200

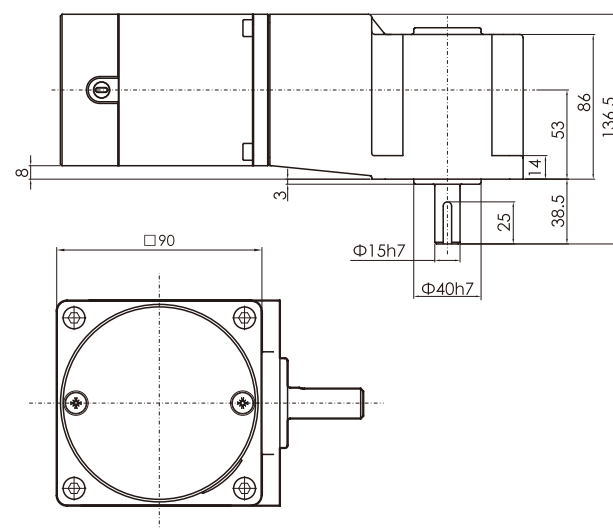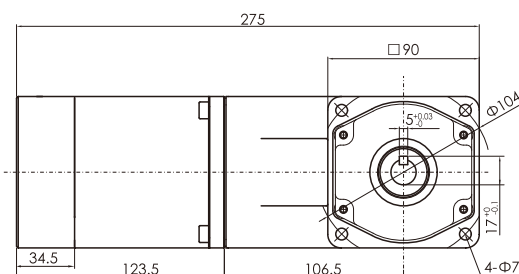

外形尺寸 (CAD) DIMENSIONS



90DC(40W/70W)

组合:电机+中间减速机+直角中实减速机

减速比:1:200~1800

Combination: motor+intermediate gearbox+right angle solid gearbox

Reduction ratio:(1:200~1800)

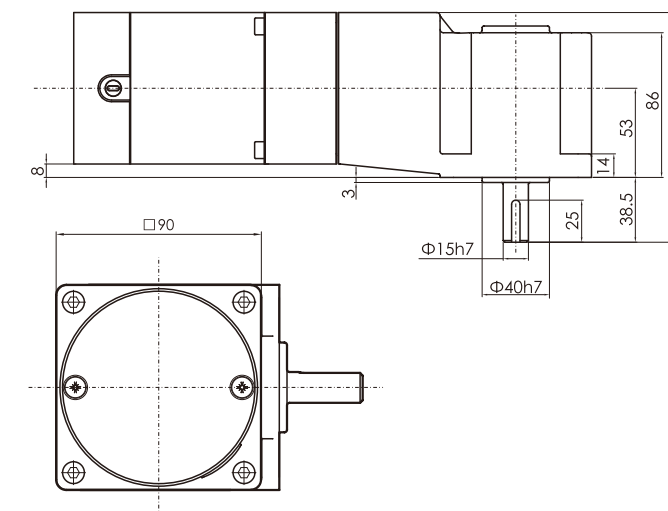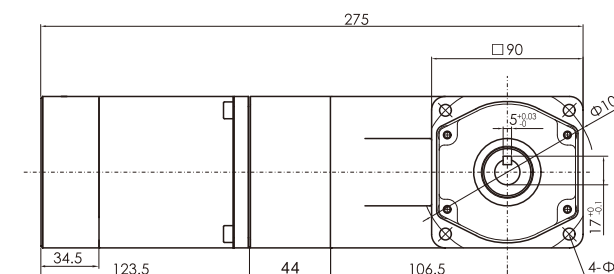


90DC(40W/70W)

组合：电机+直角中空减速机

减速比：1:3~200

Combination: motor+right angle hollow gearbox

Reduction ratio:(1:3~200)

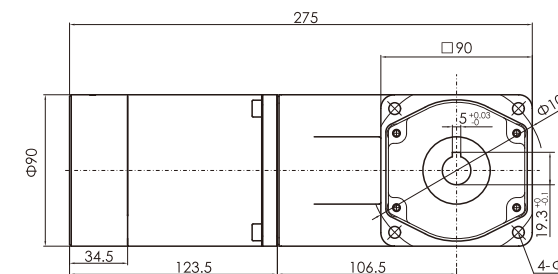




90DC(40W/70W)

组合:电机+中间减速机+直角中空减速机

减速比:1:200~1800

Combination: motor+intermediate gearbox+right angle hollow gearbox

Reduction ratio:(1:200~1800)

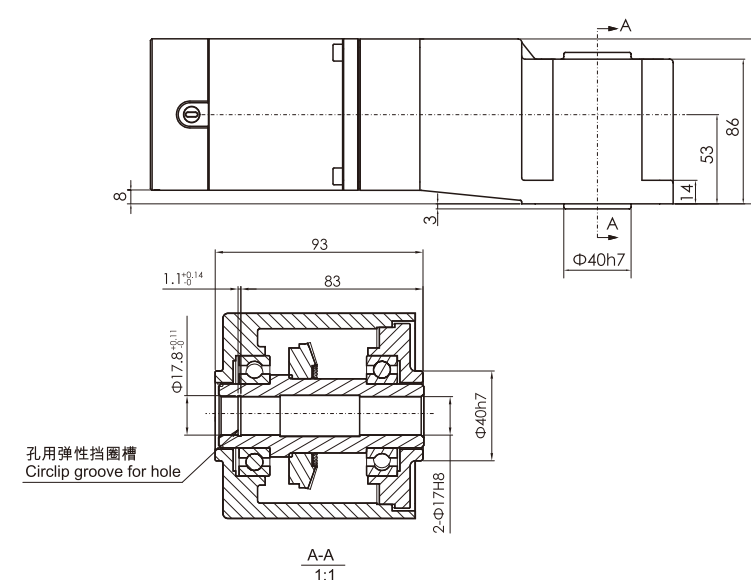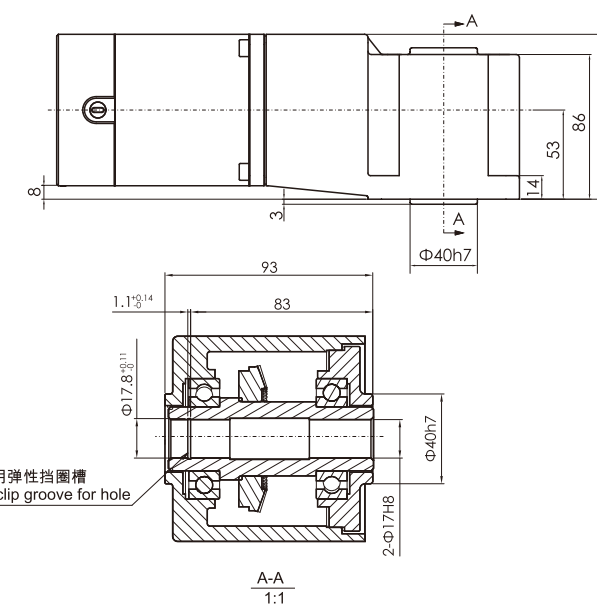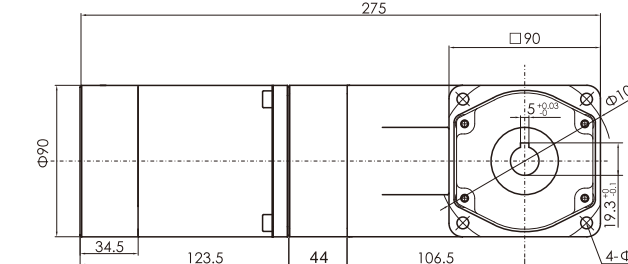


外形尺寸(CAD) DIMENSIONS

90DC(65W/120W)


圆轴电机

Round-axis motor

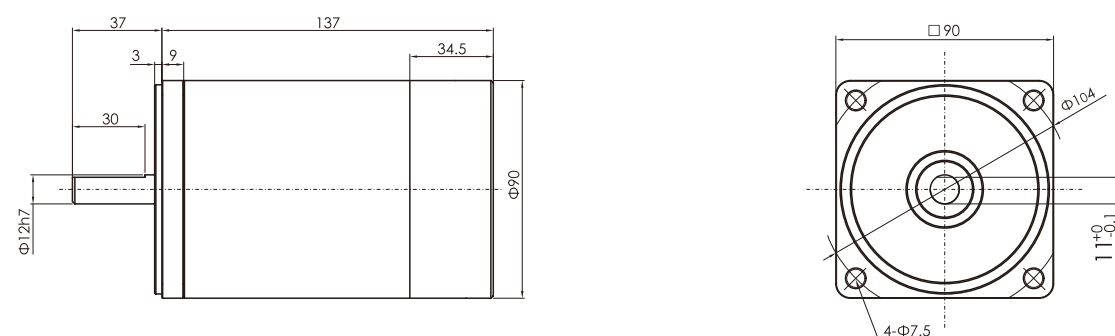


组合：电机+标准减速箱 (减速比：1:3~200)

Combination: motor + standard gearbox (reduction ratio: 1:3~200)

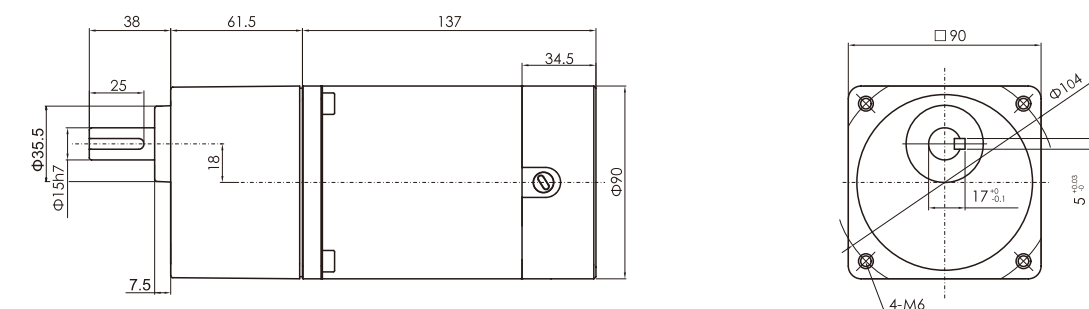

组合:电机+中间减速箱+标准减速箱(减速比:1:200~1800)

Combination: motor+intermediate gearbox+standard gearbox(reduction ratio:1:200~1800)

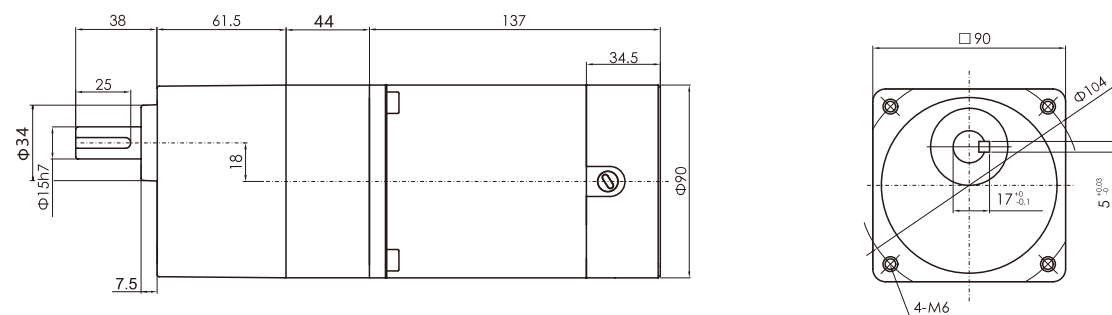


外形尺寸(CAD) DIMENSIONS

90DC(65W/120W)


组合：电机+带耳减速箱 (减速比：1:3~200)

Combination: motor + eared gear (reduction ratio: 1:3~200)

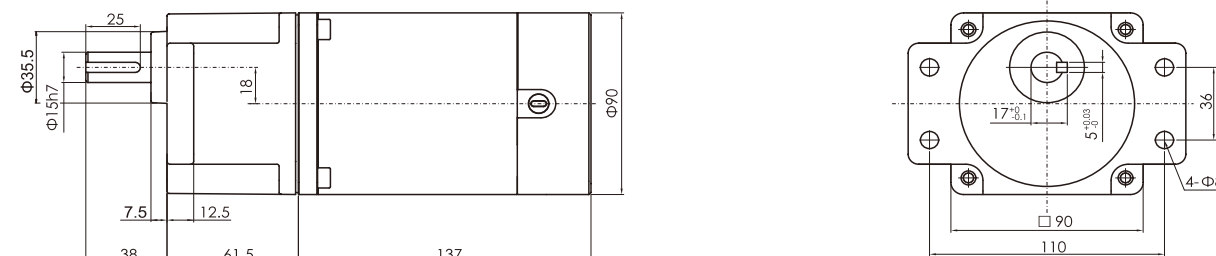

组合:电机+中间减速箱+带耳减速箱(减速比:1:200~1800)

Combination: motor+intermediate gearbox+eared gear(reduction ratio:1:200~1800)


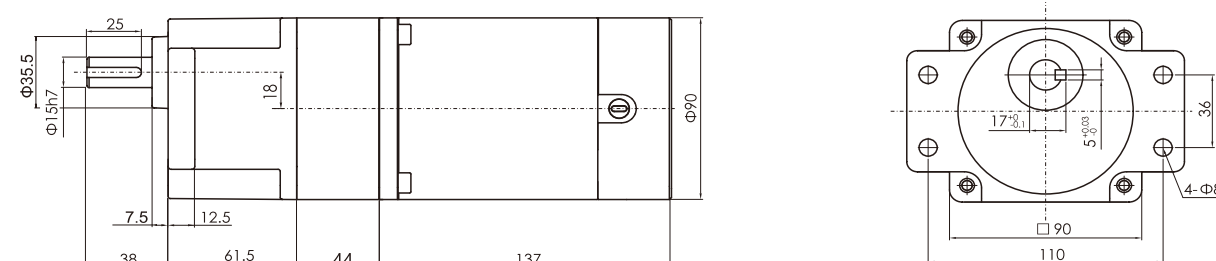


90DC(65W/120W)

组合：电机+直角中实减速箱 (减速比：1:3~200)

Combination: motor + right angle solid gearbox

Reduction ratio: 1:3~200

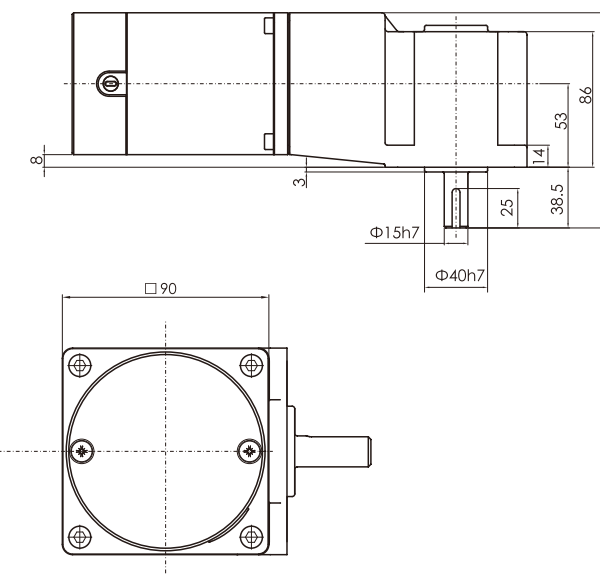
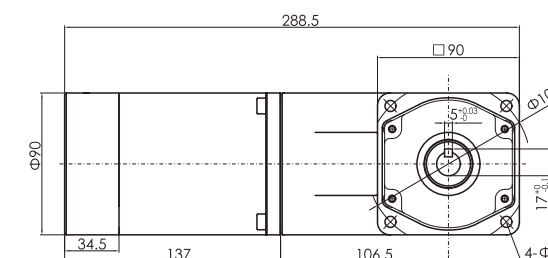


外形尺寸 (CAD) DIMENSIONS

90DC(65W/120W)

组合:电机+中间减速箱+直角中实减速箱
(减速比:1:200~1800)



Combination: motor+intermediate gearbox+right angle solid gearbox
Reduction ratio: 1:200~1800

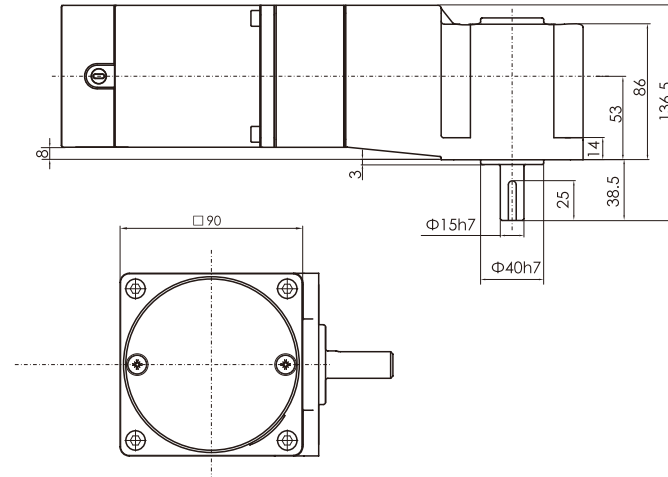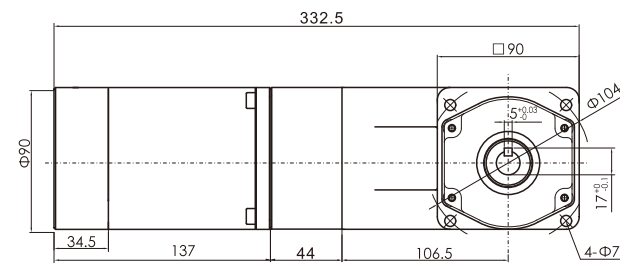

90DC(65W/120W)

组合：电机+直角中空减速箱（减速比：1:3~200）



Combination: motor + right angle hollow gearbox
Reduction ratio: 1:3~200

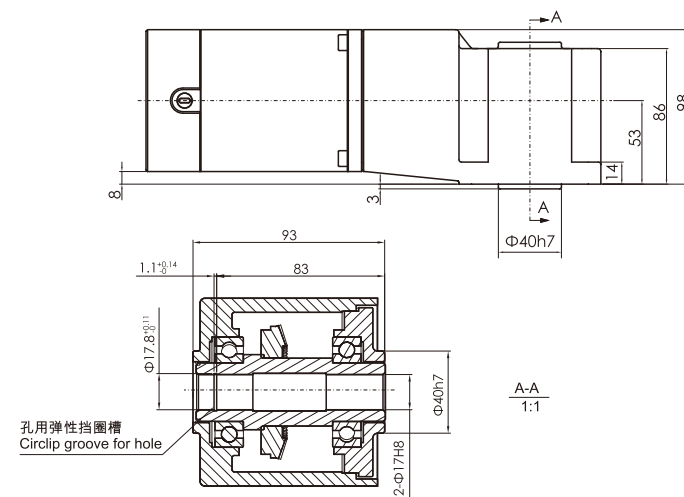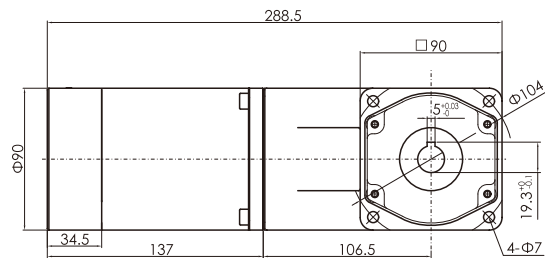

90DC(65W/120W)

组合:电机+中间减速箱+直角中空减速箱
(减速比:1:200~1800)

Combination: motor+intermediate gearbox+right angle hollow gearbox
Reduction ratio: 1:200~1800

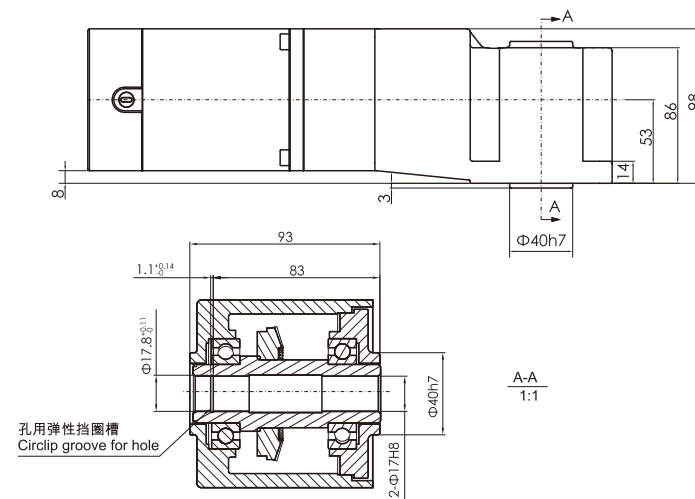
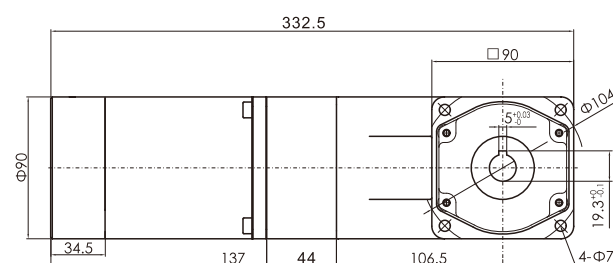


外形尺寸 (CAD) DIMENSIONS

90DC(100W/200W)



圆轴电机

Round-axis motor

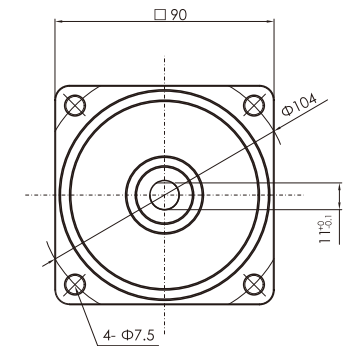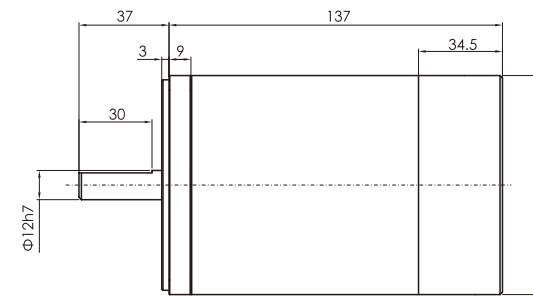



组合：电机+标准减速箱（减速比：1:3~200）

Combination: motor + standard gearbox (reduction ratio: 1:3~200)

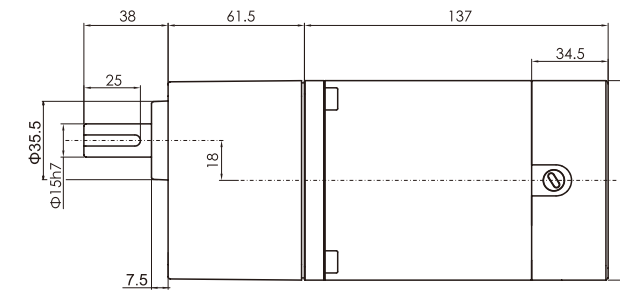

组合：电机+带耳减速箱（减速比：1:3~200）

Combination: motor + eared gear (reduction ratio: 1:3~200)

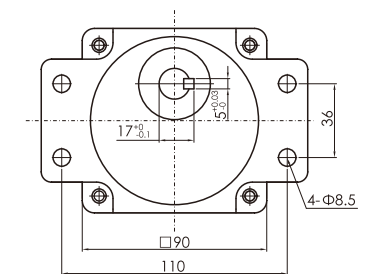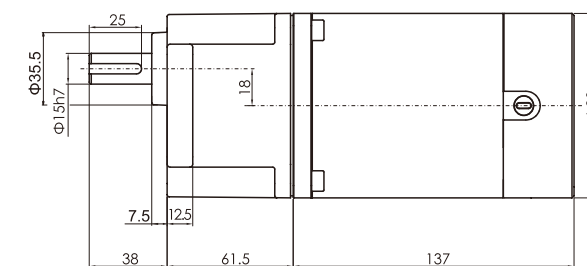


外形尺寸 (CAD) DIMENSIONS

90DC(100W/200W)






组合：电机+直角中实减速箱（减速比：1:3~200）

Combination: motor + right angle solid gearbox
Reduction ratio: 1:3~200

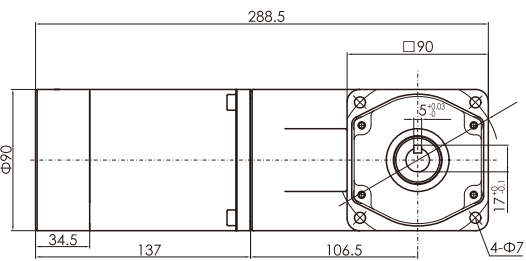

组合：电机+直角中空减速箱（减速比：1:3~200）

Combination: motor + right angle hollow gearbox
Reduction ratio: 1:3~200

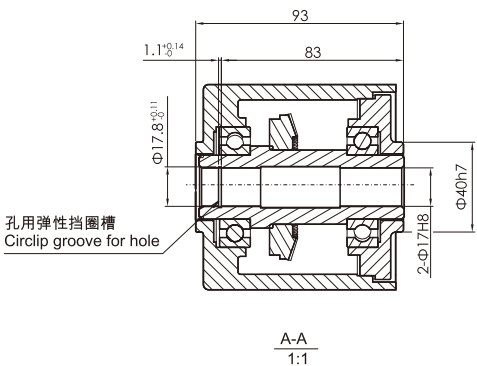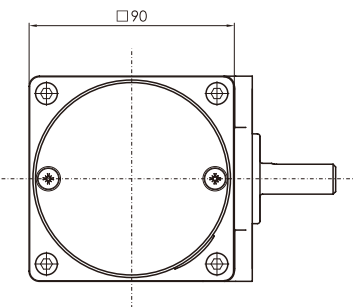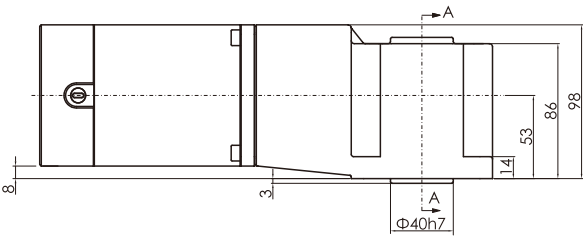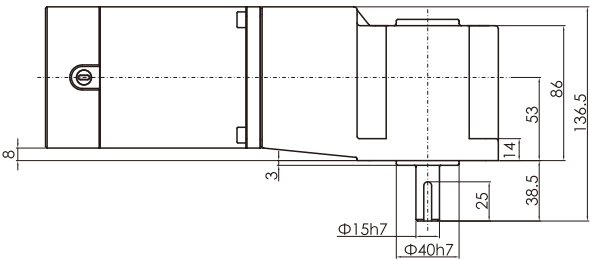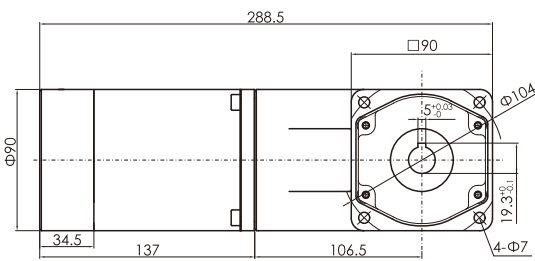

100DC

200W/300W

各型号电机性能 MOTOR PERFORMANCE

机座号 MODEL	电压V VOLTAGE	功率W POWER	负载参数 LOAD PARAMETERS			电刷寿命h BRUSH LIFE	电机重量kg MOTOR WEIGHT
			转速SPEED r/min	力矩TORQUE kg·cm	电流A CURRENT		
100DC200GV24R18	24	200	1800	11.04	12.44	2000	2.4
100DC200GV90R18	90	200	1800	11.04	3.32	2000	2.4
100DC200GV180R18	180	200	1800	11.04	1.66	2000	2.4
100DC300GV24R18	24	300	1800	16.56	18.66	2000	2.5
100DC300GV90R18	90	300	1800	16.56	4.98	2000	2.5
100DC300GV180R18	180	300	1800	16.56	2.49	2000	2.5

减速箱减速比性能对照表 REDUCTION RATIO PERFORMANCE CHART

转速 SPEED r/min	减速比	REDUCTION RATIO	3	3.6	5	6	7.5	10	12.5	15	18	20	25	30
1800	出力轴转速r/min	OUTPUT BEARING SPEED	600	500	360	300	240	180	144	120	100	90	72	60
	额定转矩N·m	RATED TORQUE	2.578	3.094	4.297	5.156	6.446	8.594	10.74	11.6	13.92	15.47	19.34	23.21
转速 SPEED	减速比	REDUCTION RATIO	36	40	50	60	75	90	100	120	150	180	200	
1800	出力轴转速r/min	OUTPUT BEARING SPEED	50	45	36	30	24	20	18	15	12	10	9	
	额定转矩N·m	RATED TORQUE	27.85	30.94	38.68	41.77	44	44	44	44	44	44	44	



标准减速箱
STANDARD GEARBOX
100GF □H



直角中空减速箱
RIGHT ANGLE HOLLOW GEARBOX
L100GF □RC



直角中实减速箱
RIGHT ANGLE SOLID GEARBOX
L100GF □RT



减速箱型号中的□为减速比的数值 速比：1:3~200 □ in gearbox model indicates the reduction ratio (1:3~200)

外形尺寸 (CAD) DIMENSIONS

100DC(200W/300W)

圆轴电机



Round-axis motor

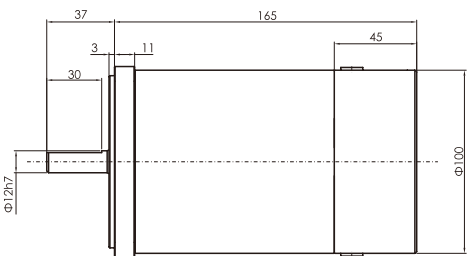

100DC(200W/300W)

组合：电机+标准减速箱（减速比：1:3~200）

Combination: motor + standard gearbox (reduction ratio: 1:3~200)






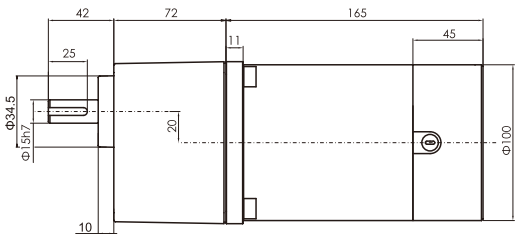


外形尺寸 (CAD) DIMENSIONS

100DC(200W/300W)

组合：电机+直角中实减速箱（减速比：1:3~200）

Combination: motor + right angle solid gearbox
Reduction ratio: 1:3~200

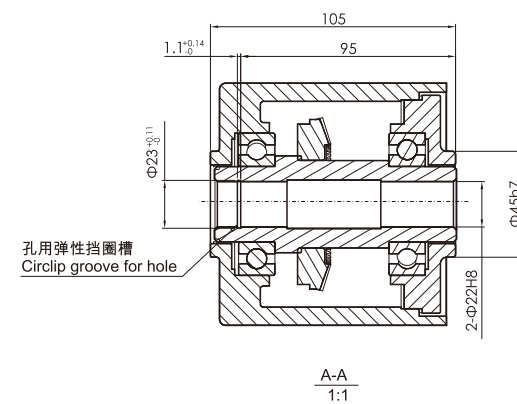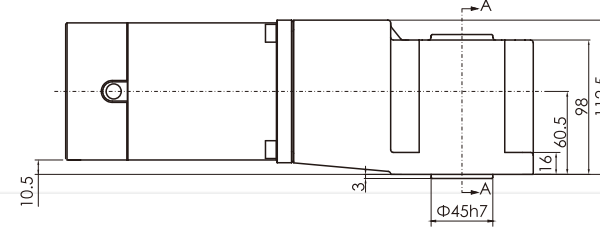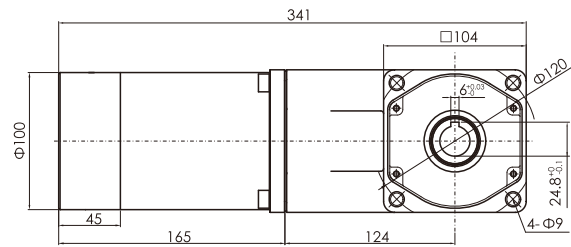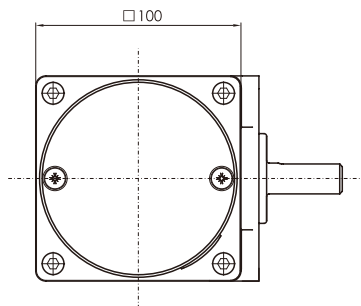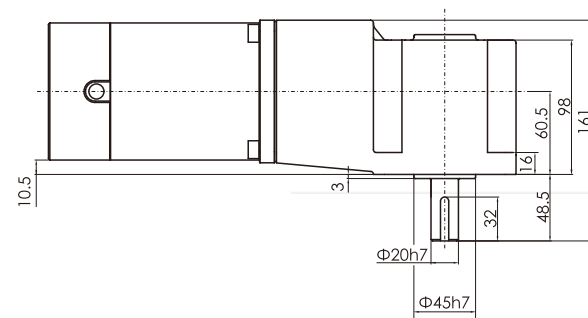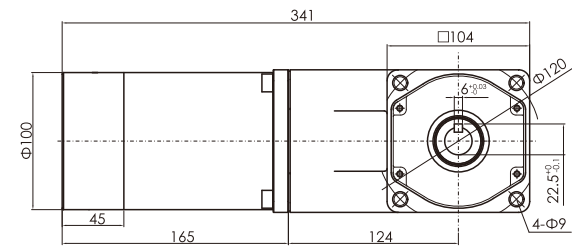

组合：电机+直角中空减速箱（减速比：1:3~200）


Combination: motor + right angle hollow gearbox
Reduction ratio: 1:3~200

带接线盒减速电机选购指南


Terminal Box Direction

- 1、万鑫标配产品不带接线盒，如需订带接线盒的减速机，需特别说明，且参考附图注明接线盒方向；
- 2、万鑫可根据客户需求将接线盒上、下、左、右4个方向调整，如客户无特殊要求，则出厂的接线盒方向统一朝上，具体如下：
- 1、The Wanshin standard product has no junction box, if you want to order the gear reducer motor with junction box, a special interpretation and a diagram for junction box direction shall be attached.
- 2、Wanshin can adjust the junction box in four directions of upward, downward, leftward and rightward according to customer's requirement. If the customer has no special requirement, the direction of the junction box shall be installed upward. The specifications are as follows:

普通减速箱接线盒方向 The direction of the junction box of the normal gear reducer

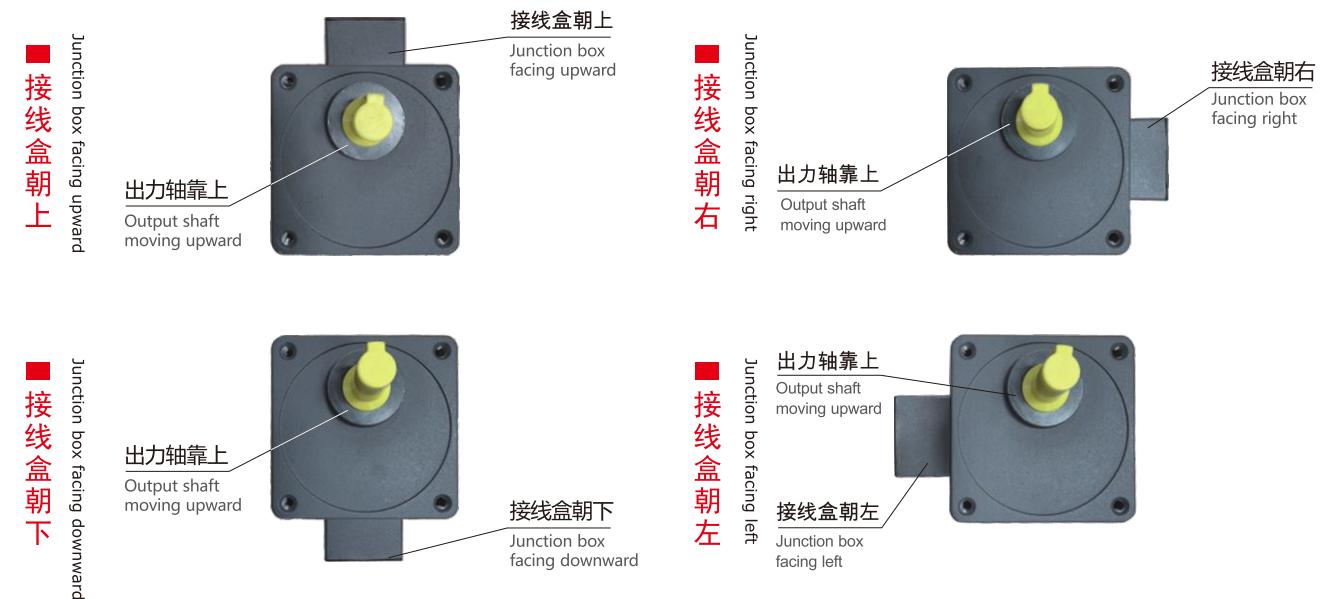

直角减速箱接线盒方向 Direction of the rectangle gear reducer junction box

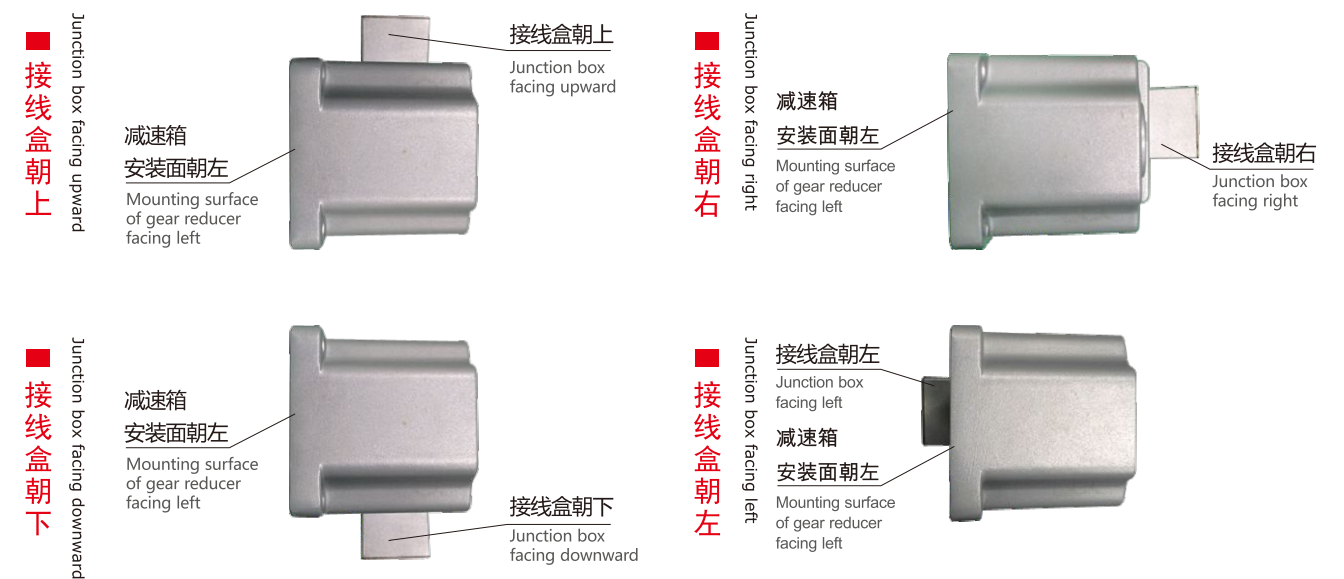

技术应用(说明及安装)

Technical Application (Description and installation)

电机 MOTOR

1 特点 Features

电机作为本产品系列相对独立的一部分，共有六个品种，十个系列供用户选择。按品种分：标准电机、阻尼电机、调速电机、电磁制动电机、调速电磁制动电机、直流电机。按功率分：6W、15W、25W、40W、60W、90W、120W、140W、200W、250W。按使用电压分：单相110V/220V、三相220V/380V。该电机可配独立的接线端子盒，以方便电气连接。由于该产品系列为精密小型动力机械，外观精巧、尺寸精准。在装配使用中严禁过度敲击以防造成内部结构损坏，同时在选型过程中注意对输出轴的轴向、径向载荷也有要求，为保证使用寿命，请谨慎选型，合理使用。

As a relatively independent part of this product series, the motor has six varieties and ten series for your option: by varieties: standard, damping, variable speed, electromagnetic brake, variable speed electromagnetic brake and DC motors; by power: 6W, 15W, 25W, 40W, 60W, 90W, 120W, 140W, 200W, and 250W; by operating voltage: single phase 110V/220V, and three phase 220V/380V. The motor can match the terminal box of independence for easy electrical connection. Since the product line is precision small power machine and has sophisticated appearance and accurate size, it is strictly prohibited to impact excessively in the assembly to avoid causing damage to the internal structure; in the selection process, also pay attention to the axial and radial load of the output bearing. To ensure the life, please select carefully and use reasonably.

标准减速箱与电机的组合 Combination of standard gearbox and motor

1 特点 Features

电机通过端面定位环与标准减速箱精密定位，可提供标准减速比1/3~1/200组合形式；在这系列减速比变换的前提下，若在选择不同功能的电机，即可实现变化更为丰富的实用组合。例如：调速、电磁制动等形式。The motor positions accurately through end face retaining ring and standard gearbox, and can provide standard reduction ratio of 1/3~1/200; when this series of reduction ratio change, you can select motors of different functions to achieve practical combinations with richer changes. For example: variable speed, electromagnetic brake, and so on.

2 特点 Installation

标准减速箱、电机，同为精密机械。在设计选型后的安装过程，就成为决定使用寿命的关系因素之一。

Standard gearbox and motor are precision machinery. During installation after design and selection, it is one of the factors that determine the life.

2 安装 Installation

对于输出轴为圆轴的独立电机，其轴端零件安装联接孔尺寸公差因型号不同分别为6H7，8H7，10H7，12H7。转配中除因设计结构外，推荐使用相对应规格的弹性联轴器。在端面安装有困难的场合，推荐使用相对应规格的直角安装脚，另外，对有冷却风扇的电机在安装时注意不要堵塞电机后部的吸风口，建议留出不少于10mm的空间。


For an independent motor with circular output bearing, the tolerance of connecting hole size for bearing component installation are 6H7, 8H7, 10H7 and 12H7 respectively depending on the models. Except for the reason of design structure, it is recommended to use flexible coupler of corresponding specifications for assembly. If it is difficult to install the end face, it is recommended to use right-angle mounting feet of corresponding specifications. In addition, do not to clog the suction opening in the rear side for the motors with cooling fans. It is recommended to leave a space not less than 10mm.

3 电机与标准减速箱的连接


Connection of the motor and standard gearbox

作为精密机械的装配，与减速箱配套的电机，在其连接端面均有凸缘止口。而减速箱的连结端面有与之配合的沉台止口。用户可根据自己的实际情况调整减速箱与电机的装配相位，也就是说，可按图示任意旋转电机或减速箱。调速到理想位置后，在紧固电机法兰上的四个螺钉，注意紧固螺钉的顺序，通过对角依次逐渐紧固，方可使电机与减速箱体紧密贴合。


For the assembly of precision machinery, the motor used together with the gearbox has flange spigot in its connecting end. The connecting end of gearbox has a mating spigot. The user can adjust the assembly position of the gearbox and motor according to the actual situation, that is, the motor and gearbox can be rotated freely as shown. Adjust to the desired position, and then secure the four screws on the motor flange. Note the order of the fastening screws, tighten diagonally in turn and then fit the motor and gearbox closely.

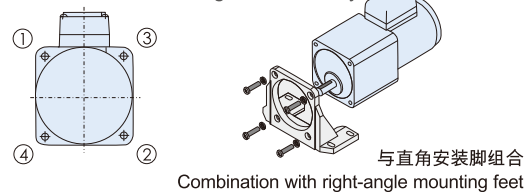

与直角安装脚组合
Combination with right-angle mounting feet

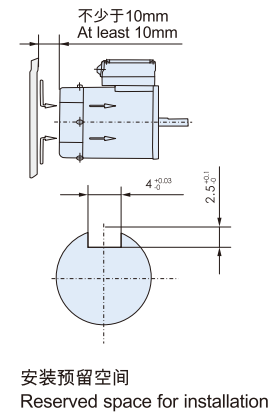

安装预留空间
Reserved space for installation

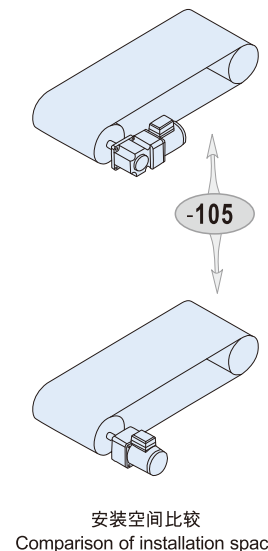

安装空间比较
Comparison of installation space

4 与设备的连接 Connection with the equipment

减速箱输出轴端的连接面为平面，其上的连接孔为螺纹孔，该面是经过精加工的平面，可与设备已加工的连接面直接连接。注意在紧定时仍应按对角依次逐渐紧固的方式。或设备连接受限，或设计结构差异，推荐使用专门配置的直角安装脚进行安装，这样更便于可靠连结，方便调速，同时也有与此配套的高精度弹性联轴器可供使用。

同样，对有冷却风扇的电机在安装时注意不要堵塞电机后部的吸风口，建议留出不少于10mm的空间。

本产品系列的电机、减速箱、中间减速箱均为紧密传动部件，在与负载连接时应格外注意，严禁猛烈敲击、扳扭。为便于装配在产品的设计生涯中已兼顾此类问题，下面是键槽宽度为4mm时的尺寸，轴外径公差等级均为h7。

The connecting surface of gearbox output bearing is flat, and the connecting holes on the surface are threaded. The surface is fine finished and can be directly connected to the processed connecting surface of the equipment. Note that it also should be tightened diagonally in turn. If limited by equipment connection or design structure difference, it is recommended to install with specially configured right angle mounting feet, which is more reliable and easy to connect, easy to regulate speed, and high precision flexible couplers are available.

Similarly, do not to clog the suction opening in the rear side for the motors with cooling fans. It is recommended to leave a space not less than 10mm.

The motor, gearbox and intermediate gearbox of this product series are close transmission components, and it is prohibited to impact or twist violently when connecting to the load. To facilitate assembly, these problems have been considered in product design. The keyway width is 4mm, and the outer diameter tolerance of the bearing is h7.

直角减速箱与电机的组合 Combination of right-angle gearbox and motor

1 特点 Features

与传统的标准减速箱（或称平行轴减速箱）不同，为了给设计者提供更大的选择空间，使设备整体更加紧凑，本公司还提供了直角减速箱的传动形式。直角减速箱除具有标准减速箱的所有功能外，也就是宽范围的速比选择性（i=3~600），优异的传递性能，还具有高强度的壳体，以及紧凑的安装形式，这是标准减速箱所不及的。同样，在前述条件下，通过选择不同功能的电机，能实现不同的功能组合。

例如：调速、电磁制动、可逆等等。Different from traditional standard gearboxes (or parallel shaft gearboxes), in order to give designers greater choice and make the equipment more compact, we also offer right angle gearboxes. In addition to all the features of standard gearboxes, i.e. wide range of speed ratio selectivity (i=3~600) and excellent transfer properties, the right-angle gearboxes also have high strength casing and compact installation, which the standard gearboxes do not have.

Similarly, under the aforementioned conditions, you can achieve different combinations of features by selecting motors of different functions.

For example: variable speed, electromagnetic brake, reversible, and so on.

4 与设备的连接 Connection with the equipment

直角减速箱输出轴的端面为精加工平面，其上四角分布地四个通孔，可与设备已加工的连接面直接贴合连接，在直角减速箱的输出方式分为中实轴与中空轴两种形式工，用户可根据负载的形式选择，紧固螺栓时，同样应采用对角依次逐渐紧固地方式。The end surface of right angle gearbox output bearing is finished plane. The four through holes distributed in the four corners can fit the processed connection surface of the equipment directly. The output of right angle gearbox includes solid axis and hollow axis forms. The user can select according to the load form. The bolts also should be fastened diagonally in turn.

2 特点 Installation

直角减速箱、中间减速箱和电机属精密机械。在设计选型后的装配质量将会直接影响其使用寿命以及性能。Right angle gearbox, intermediate gearbox and motor are precision machinery. The assembly quality after design and selection will directly affect the service life and performance.



3 电机与标准减速箱的连接

Connection of the motor and the right angle gearbox



作为精密机的装配，与直角减速箱配套的电机除有独立的连线端子盒外，在其连接端面均有凸缘止口。而直角减速箱输入端面有与之配合的沉台止口。用户可根据实际情况，适当地旋转电机与直角减速箱的相对旋向。调整到位后，在坚定电机到连接法兰上的四个螺钉。注意紧固螺钉的顺序：对角依次逐渐紧固。

For the assembly of precision machinery, in addition to independent connection terminal box, the motor used together with the right angle gearbox has flange spigot in its connecting end. The connecting end of the right angle gearbox has a mating spigot. The user can rotate the relative rotation of the motor and the right angle gearbox appropriately according to the actual situation. Adjust to the desired position, and then secure the four screws on the motor flange.


Note the order of screw tightening: tighten diagonally in turn.

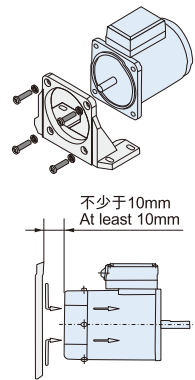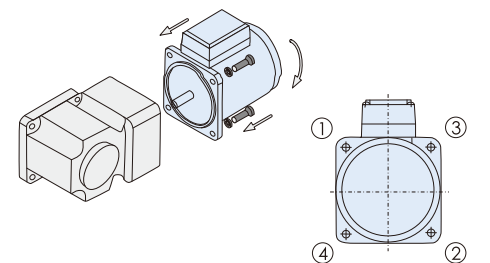

不少于10mm
At least 10mm



带中间减速箱
With intermediate gearbox



5 直角减速机中实轴输出的连接
Connection with solid axis output of right angle gearbox

直角减速机中实轴输出为键槽结构形式，对应不同规格，与其输出轴装配孔的尺寸分别为：12H7，15H7，20H7三种。在与负载的连接中，严禁猛烈敲击、扳扭，在确保装配质量的前提下，该产品在设计生产中也兼顾了有关装配的因素。如图所示为键宽4mm尺寸公差。
The solid axis output of right angle gearbox is in keyway structure. Corresponding to different specifications, the sizes of the output bearing mounting holes are 12H7, 15H7 and 20H7 respectively. In connection with the load, do not knock or twist violently. Under the premise of ensuring the assembly quality, other assembly factors are also considered in product design and production. The figure shows 4mm key width dimensional tolerance.

7 电机，减速箱的转配注意事项
Precautions for motor and gearbox assembly

电机、减速箱以及中间减速箱同为精密机械。在实际应用中，因装配不当而造成损失或报废的情况尤为突出，所以装配环节也是影响正常使用的因素之一。
Motor, gearbox and intermediate gearbox are precision machinery. In practice, damage and scrapping are often caused by improper assembly, so that the assembly is also one of the factors affecting the normal use.

●轴、键公差 Shaft and key tolerance

为便于转配，同时保证可靠的连接，以及转矩传递。产品对所涉及到的键槽公差在现有的规格中，均有一般通用设备略大（具体公差详见样本），输出轴类公差为H7, 孔类H8。

To facilitate the assembly and ensure reliable connection and torque transmission, the related keyway tolerances are generally slightly larger than generic devices (see sample for specific tolerance), the tolerance of output bearings is H7, and the tolerance of holes is H8.

●敲击问题 Percussion problem

转配中严禁对负载轴、套进行压力转配，这将容易导致电机或减速箱体中轴承或齿轮的损坏，也会三十齿轮的齿合印痕。同时也要避免猛烈敲击，以及扳扭。严格控制负载轴、套的尺寸公差，必要时可用软质材料衬垫，轻微敲击。

It is prohibited to transfer the pressure of load axis and sleeve in the assembly process, or else it will easily lead to damage to the bearings or gears in the motor or gearbox and ratcheting prints on the gear teeth. Also avoid violent knock and twist. Control the dimensional tolerance of the load axis and sleeve strictly; if necessary, pad soft liner material and knock softly.

●同心度问题 Concentricity problem


由于输出均为回转形式，在调速，重载工况下，同心度尤为为重要。推荐选用本公司配套生产的弹性联轴器，它不仅回转惯量小，结构紧凑，而且具备同心度补偿和传递转矩。

Since the output is in rotating form, concentricity is particularly important in variable speed and heavy-duty condition. It is recommended to use the flexible couplers of our company, which not only have small rotary inertia and compact structure, but also compensate concentricity and transmit torque.

6 直角减速机中空轴输出的连接
Connection with hollow axis output of right angle gearbox

在中空系列的直角减速机装配中，同样注意严禁猛烈敲击，扳扭。与中空轴连接的轴尺寸差为h8, 分别有：15h8, 17h8, 22h8三种。为使与负载连接时有可靠合理的轴向定位，在直角减速机中空系列中还设置了轴向固定结构。推荐的安装方式如图所示：

In the assembly of hollow series right angle gearboxes, it is also prohibited to knock or twist violently. The dimensional tolerance of the axis connected to the hollow axis is h8, including 15h8, 17h8 and 22h8. To ensure reasonable and reliable axial positioning in load connection, the hollow series right angle gearboxes also integrate axially fixed structure. The recommended installation is shown in the figure:

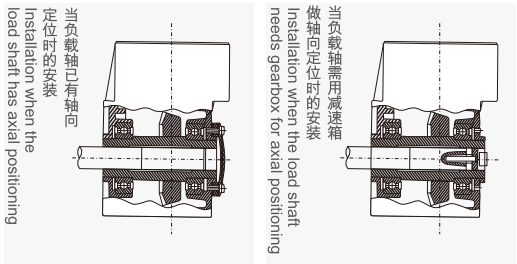

●特别注意 Special Note

- 1、用直角中空减速机做轴向定位时，不允许负载轴有过定位的现象，否则将易损坏减速箱。
- 2、直角中空减速机配轴长度技术要求：
 - 若此轴是完全利用中空轴支撑固定，则轴长应与中空轴等长或略短一点。
 - 若无支撑作用，仅传递转矩，则轴仅需插入中空轴1/3深即可。
- 1、For axial positioning with the right angle hollow gearbox, over-positioning isn't allowed for the load axis, or else it will easily damage the gearbox.
- 2、Technical requirements on axis length of rightangle hollow gearbox:
 - If this axis is fully supported and fixed by hollow axis, the axial length should be equal to or slightly shorter than the hollow axis.
 - If there is no supporting effect and only the torque is transferred, the axis only needs to be inserted 1/3 depth of the hollow axis.

●轴向固定步骤 Steps of axial fixation

- 1、取下直角减速机中空轴另一侧的防尘盖；
- 2、如图所示，对不同结构的负载轴按图示方法固定；
- 3、安装后部防尘盖（注意：螺栓高度不得超过后端盖面2mm）；
- 4、若无法安装防尘盖，则必须用M4×5螺钉将原防尘盖螺钉孔堵住，否则会漏油，同时螺钉勿超长，否则将顶坏内部轴承。
- 1、Remove the dust cover on the other side of the hollow axis of the right angle gearbox;
- 2、As shown in the figure, fix the load axis of different structures in the method shown;
- 3、Install the rear dust cover (Note: Bolt height shall not exceed 2mm of the rear cap);
- 4、If the dust cover can't be installed, you must block the screw holes of the dust cover with M4×5 screws, or else it will leak oil; the screws shouldn't be too long, or else it will damage the internal bearings.